




## INSTALLATION GUIDE

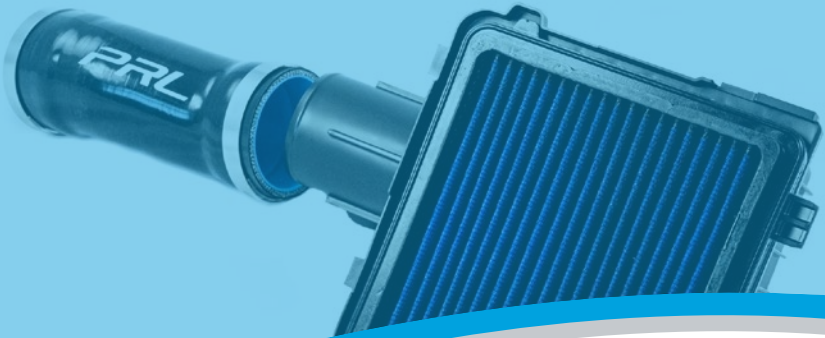

HONDA CIVIC 1.5T (2022+)  
STAGE 1 INTAKE

# PRL INSTALLATION OVERVIEW

PRODUCT: PRL-HC11-INT-S1 PRL MOTORSPORTS STAGE 1 INTAKE

FITMENT: 2022+ Honda Civic 1.5L Turbo

INSTALLATION TIME: Approximately 10 - 15 minutes

NOTE: THIS ITEM DOES NOT REQUIRE AN ECU RE-CALIBRATION.

Please check that all components that are listed in the parts list have been supplied to you, and are correct. If you require any assistance or are missing components please email: [support@prlmotorsports.com](mailto:support@prlmotorsports.com). Please verify with a customer service representative before installation or returning the product.

## PRODUCT DISCLAIMER:

United States 48 State Compliant:

California/New York Residents please see Prop 65.


This is a Race Only product that is to be used solely for competition, it cannot be used on vehicles that are operated on public streets, roads or highways. Its use is limited to closed-course and open-course racing that is formally sanctioned by a recognized racing organization. Any other use including recreational use could be in violation of local, state and federal laws.

PRL Motorsports is not responsible for any vehicle damage or personal injury that may occur due to an installation error, product misuse, or removal of PRL Motorsports products. PRL Motorsports highly suggests that a trained professional conduct the installation on all products. PRL Motorsports is not responsible for damaged products due to incorrect installation.

## REQUIRED TOOLS:

Phillips Head Screw Driver



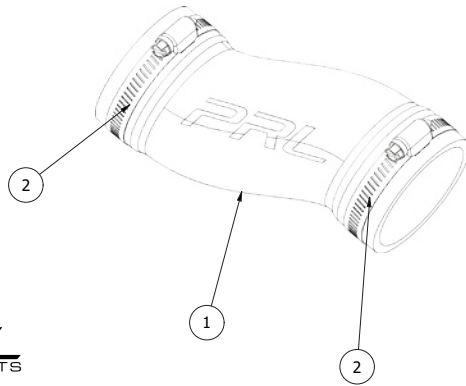

## COMPONENT LIST

#	PART #	QTY	DESCRIPTION
1	SIL-HC11-INT-HOSE	1	2022+ Civic 1.5T Stage Intake Silicone Hose
2	IFE-60-80-12	2	IFE 60-80-12 Hose Clamp
3	PRL-AF-5082	1	2022+ Civic 1.5T Panel Filter Upgrade

## Before Beginning Your Installation:

1. Turn off the ignition. Loosen battery terminal and disconnect the negative battery terminal cable. Allow the vehicle to sit for a minimum of 5 minutes to drain any remaining charge from the charging system.

**NOTE:** Disconnection of the negative battery cable erases pre-programmed electronic memory. We recommend saving any memory settings before disconnecting the negative terminal. Some radios will require an anti-theft code to be entered after the negative battery cable is reconnected.




## Preparing Your Stage 1 Intake

2. Before beginning any OEM component removal, please reference the parts list and ensure all components are enclosed. If something is missing, please contact PRL Customer Support.

3. The Stage 1 Intake uses the factory airbox and replaces the factory hose. You will not need to remove the airbox to replace the filter inside.


4. Remove the top of the factory airbox. Simply pull up on the tabs to release the lid from the box itself.

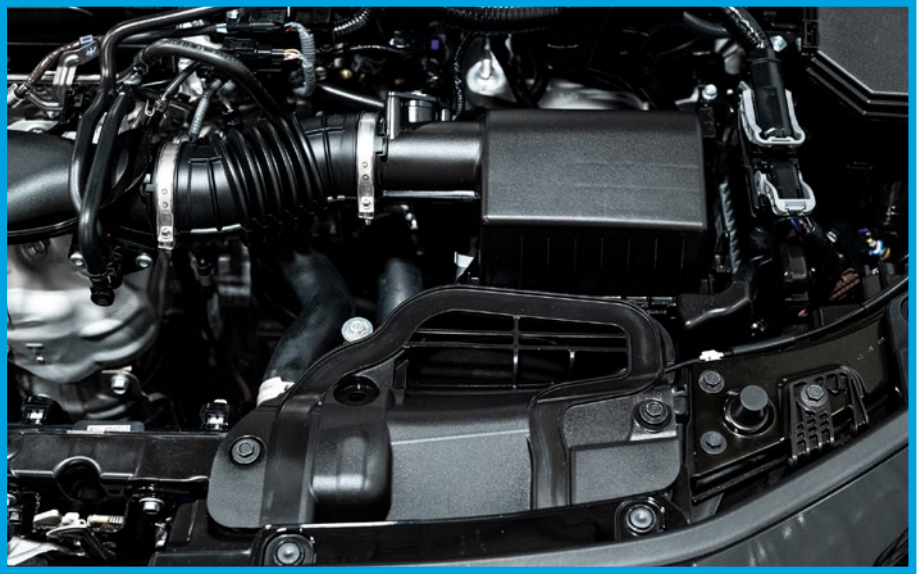

5. Place the PRL Stage 1 Intake Panel Filter Upgrade into the factory airbox and snap the lid back into place.



6. Loosen the (2) factory hose clamps on the factory corrugated intake hose. The hose and clamps will not be re-used.

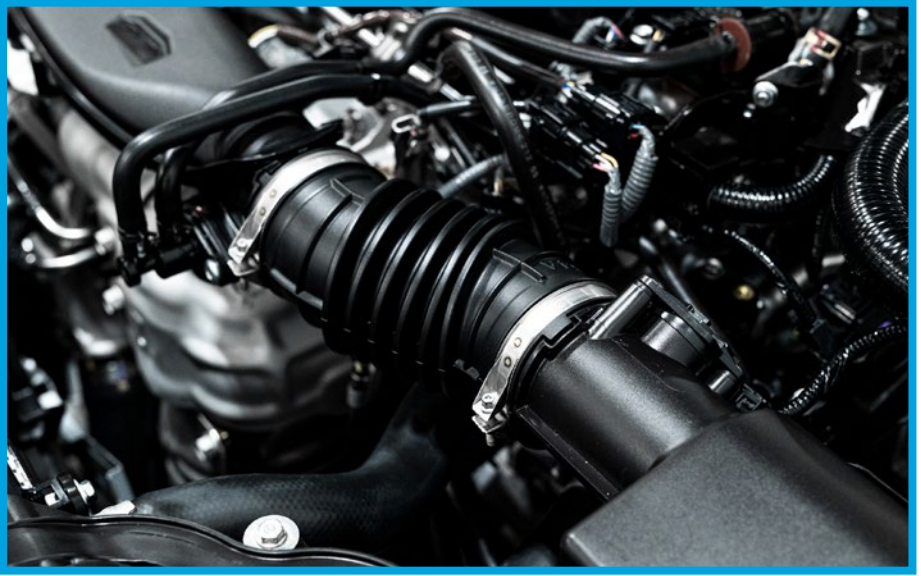

7. Place the (2) provided worm gear clamps onto each end of the silicone and tighten with a Philips head screwdriver.



## Road Testing Your PRL Stage 1 Intake

1. Start the vehicle with the transmission in neutral and the emergency brake engaged. Assess to make sure of any possible issue(s) and then make any subsequent adjustments as they are needed.
2. Test drive the vehicle to ensure everything is in working order.
3. If after the road testing, everything is good to go, enjoy your PRL Stage 1 Intake! Thank you for being a part of the #PRLARMY.

If you have any questions/concerns please reach out to us at:  
[support@PRLMotorsports.com](mailto:support@PRLMotorsports.com)

Please provide a full description of your issue, ideally with any pertinent images or video clips that can help our team address the issue.

Please note: All support tickets are addressed during business hours and in order of received.

As stated at the beginning of this guide, the PRL Stage 1 Intake has been specifically designed to be 100% compatible with the factory ECU calibration. No tuning is required to benefit from the advertised gains and performance.

## Required Maintenance

PRL Motorsports thoroughly recommends visually inspecting the air filter screen inside the airbox at every oil change. It is required to clean the air filter element whenever the screen is no longer visible or at a 30,000 mile interval. When used in a higher dust/arid climate or varied terrain environments, the air filter will require cleaning more often. To clean and re-oil, our #2801 Filter Cleaning & Recharge kits can be purchased direct on our website, or via an authorized PRL Motorsports dealer.

## Filter Recharging Guide:

- 1. Pre-Cleaning:** Tap the filter or use canned air/compressor to remove any excess debris from the filter. Be careful to not damage the filter.
- 2. Apply Cleaner:** Spray the filter with the special cleaning solution provided in the kit and allow the solution to soak in for at least 15 minutes.
- 3. Rinsing:** Rinse the filter with warm water, clean side to dirty side to flush the dirt and debris outwards from the filter.
- 4. Drying:** Allow the filter to dry naturally. Try to avoid heat to prohibit any shrinkage that could occur in the cotton present in the filter.
- 5. Oil Application:** Re-oil the filter using the filter oil that is supplied in the kit. It is recommended to use a single spray per 2" of filter media. Do not over oil.



1400 RANDALL COURT - UNIT 104  
EXPORT, PENNSYLVANIA 15632

[www.PRLMotorsports.com](http://www.PRLMotorsports.com)

Follow Us!  
PRLMotorsports

