


HAMR


Highly Adaptive Motor Retainer
54/38 Adapter Kit



Slide the motor assembly into the 54mm motor mount of the rocket. Continue to slide the motor assembly in until you seat the Offset Ring within the HAMR Sleeve.

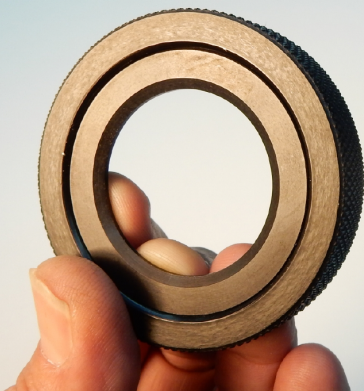

Place the Stepped Ring into the HAMR Cap so that the step is centered in the opening of the HAMR Cap.

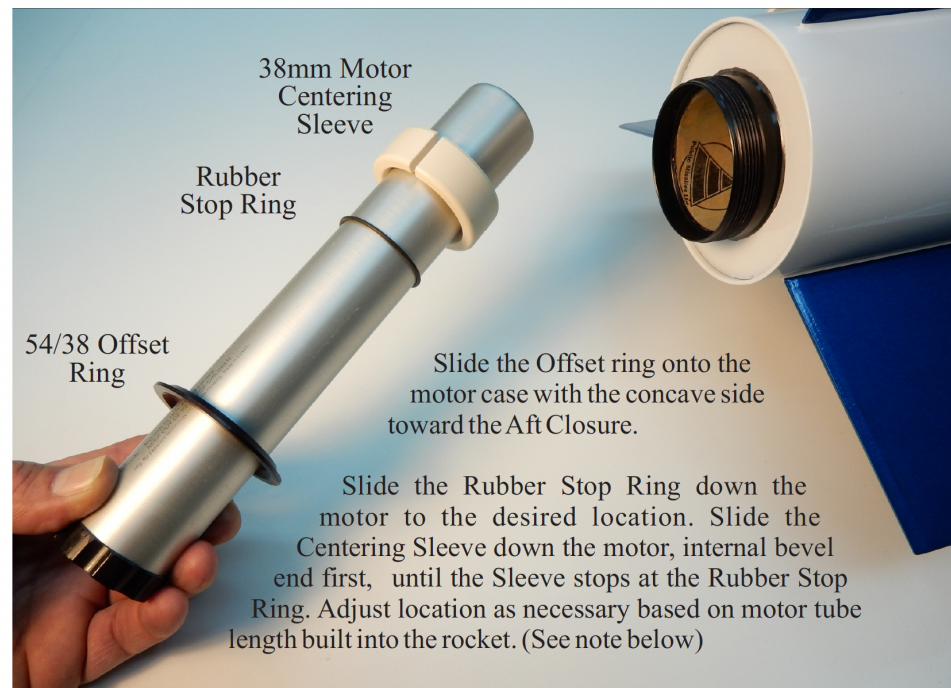

Screw the Cap and Stepped Ring assembly onto the HAMR Sleeve. Be sure the Stepped Ring is still centered in the Cap before snugging.

That's it!

NOTE: The 38mm motor can be longer than the 54mm motor tube of the rocket. This is fine, but be sure to locate the centering sleeve on the motor so that the centering sleeve stays within the 54mm mount.

PublicMissiles.com

