






FELCO 100 - Green

- Cut & hold roses and flowers pruning shear

Made in Switzerland by FELCO



10mm/0.4in. S L 210mm/8.3in. 255g/9oz.



> **Reliable:** comfortable, light, sturdy handles made of forged aluminium with a lifetime guarantee* / anvils made of aluminium with a lifetime guarantee* / blade and screw-mounted anvil blade made of high-quality hardened steel / clean, precise cut / all parts can be replaced

> **Efficient:** easy, durable cutting adjustment / wire cutting notch / sap groove

> **Ergonomic:** hand protection is provided by the cushion-shock absorber / non-slip coating / 2 opening positions for small or big cuts

RECOMMENDED FOR

Our recommendation (★ = Recommended, ★★ = Strongly recommended, ★★★ = Best fit)

Special applications	★★★
Small hand	★★★
Average-sized hand	★★★
Large hand	★★★
Right-handed	★★★
Left-handed	★★★

ACCESSORIES



FELCO 902
Sharpening tool
Sharpening stone



FELCO 903
Sharpening tool
Sharpener



FELCO 910
Holster
Leather - With belt loop and clip



FELCO 912
Holster
Leather - With belt clip




FELCO 980
Maintenance product
Spray







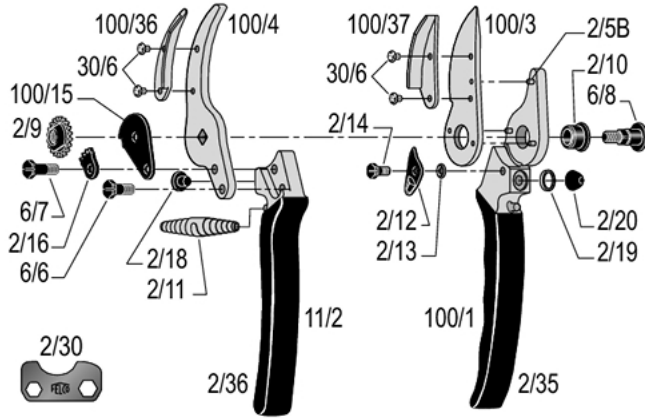







































FELCO 990
Maintenance product
Grease

SPARE PARTS



FELCO	REF.	Designation	Composition	UCC Barcode
	2/30	Adjustment key	1x 2/30	
	100/3	Blade	1x 100/3	
	100/36	Anvil for anvil-blade	1x 100/36	
	100/37	Anvil for blade	1x 100/37	
	100/4	Anvil-blade with screw	1x 100/4 + 1x6/6	
	100/95	Anvils for blade and anvil-blade with screws	1x 100/37 + 1x 100/36 + 4x 30/6	
	6/90	Kit	1x 6/7 + 1x 2/16 + 1x 2/9 + 1x 6/8	
	2/91	Kit	2x 2/11	
	100/92	Kit	1x 100/15 + 1x 2/18 + 1x 2/14 + 1x 2/12 + 1x 2/13 + 1x 2/20	

	2/93	Kit	4x 2/18 + 6x 2/20	 7 83929 40021 1
	6/94	Kit	1x 2/9 + 1x 6/8	 7 83929 40027 3
	100/1	Handle without blade	1x 100/1 + 3x 2/5B + 1x 2/19 + 1x 2/20 + 1x 2/10 + 1x 2/13 + 1x 2/12 + 1x 2/14 + 1x 2/35	 7 83929 40125 6
	11/2	Handle without anvil-blade	1x 11/2 + 1x 2/18 + 1x 2/36	 7 83929 40132 4
	2/35	Coating for blade handle	1x 2/35	 7 83929 40164 5
	2/36	Coating for anvil-blade handle	1x 2/36	 7 83929 40165 2
	2/5B	Rivet for blade	1x 2/5B	 7 83929 40166 9
	6/6	Screw for anvil-blade	1x 6/6	 7 83929 40221 5
	30/6	Screw for anvil 4 mm	1x 30/6	 7 83929 40196 6
	6/8	Bolt	1x 6/8	 7 83929 40223 9
	2/9	Nut	1x 2/9	 7 83929 40169 0
	2/10	Bush	1x 2/10	 7 83929 40151 5
	2/11	White spring	1x 2/11	 7 83929 40152 2
	2/12	Thumb catch	1x 2/12	 7 83929 40153 9
	2/13	Spring for thumb catch	1x 2/13	 7 83929 40154 6

	2/14	Screw for thumb catch	1x 2/14	
	100/15	Catch plate	1x 100/15	
	2/16	Locking segment	1x 2/16	
	6/7	Screw for locking segment	1x 6/7	
	2/18	Cushion	1x 2/18	
	2/19	Edging	1x 2/19	
	2/20	Shock absorber	1x 2/20	

MAINTENANCE



Cleaning

It is advisable to clean your tool after each use.

If your tool is particularly dirty or subject to rusting after exposure to moisture, do not delay cleaning.



Oiling

After cleaning, it is advisable to oil the tool so as to protect it from corrosion. The oil will also unjam the tool.



Sharpening

It is advisable to sharpen your tool at least once a day, but if you feel that your tool is not cutting as well as usual, sharpen it right away!



Dismantling

It is advisable to dismantle your tool on a regular basis, but at the very latest when it appears to be jammed.

PARTS REPLACEMENT



Changing the blade

When the blade and the anvil-blade no longer cross, or when the blade is badly damaged, it is advisable to change it.

Regulate the working of the blade and anvil-blade by adjusting the tightening of the nut. The blade should rub against the anvil-blade over 2/3 of its length.



Changing the anvil-blade

When the blade and anvil-blade no longer cross and the anvil-blade is badly damaged, it is advisable to change it.



Changing the shock absorber

When the tool closes too abruptly during pruning, and the cushion is in good condition, the shock absorber should be changed.



Changing the cushion

When the tool closes too abruptly during pruning and the shock absorber is in good condition, the cushion must be changed.



Changing the thumb catch

When the thumb catch is damaged and loosens when used, even when the screw is readjusted, change it.



Changing the plastic coatings for handles

If the coatings are badly damaged, you can replace them.

Soak the coatings for 2 minutes in boiling water - recommended glue: Loctite 415.