


# Printed Balloon Tower Kit Assembly



Please inflate all balloons within 30 days of purchase to comply with Warranty Guidelines.

# PARTS INCLUDED

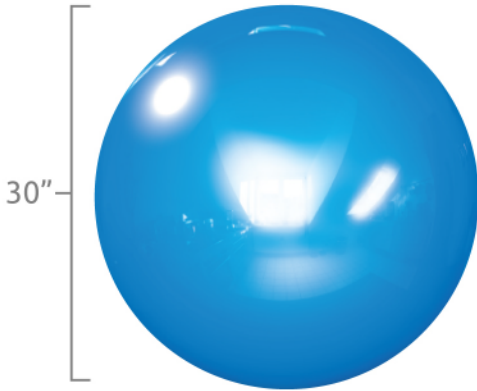

PermaShine® 30" Balloon



30" Balloon Screw Plug



30" Balloon Upper Cup



Tower Upper Key

## Recommended




FastFlow Inflator



Air Compressor



Printed Coroplast  
6 pcs

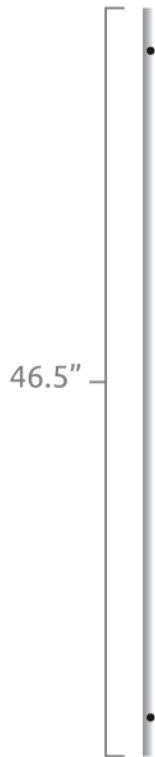

Tower Pole



Tower Extension




Tower Pole  
Connector Tube




32" x 24.5"  
Fold-Out Stand


- 1.1** Excluding the Top Cube as shown below, fold five Printed Coroplast sheets into squares to make Tower Cubes. Fold velcro flap backward and crease to ensure 90° angle and attach. Set Tower Cubes aside until Step 1.5.

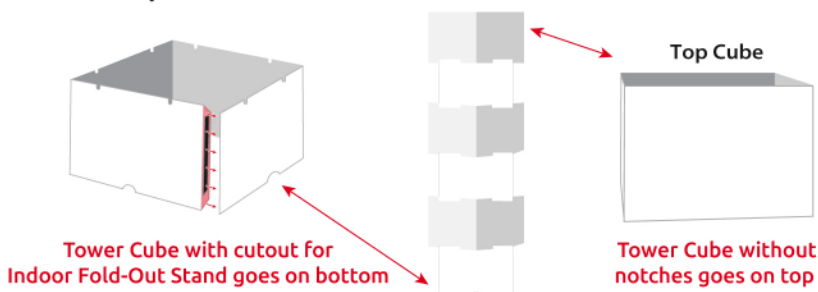

- 1.2** Choose the desired location for the Printed Balloon Tower, as it will be more difficult to move once complete, and set up the Fold-Out Stand.

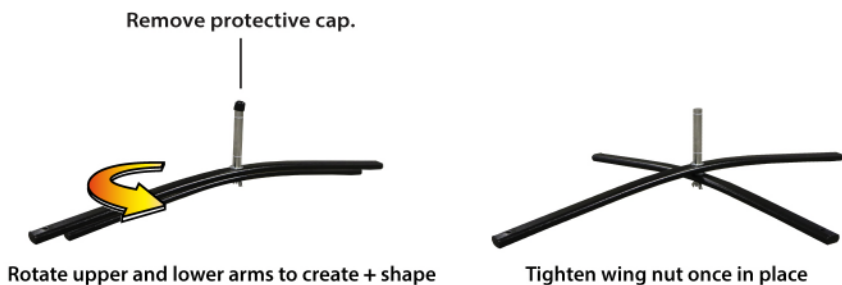

- 1.3** A. Attach the Upper Key onto the 30" Balloon Screw Plug. Press lower end of button with arrow for a click sound to engage. B. Screw the assembly into the deflated 30" Balloon until it's completely seated in the base of the Upper Cup.

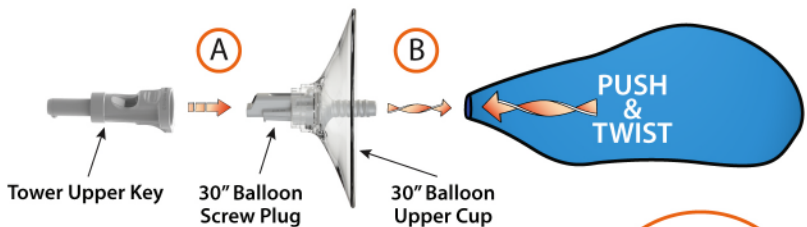


- C. Remove the plug. Inflate until the Balloon is tight and there are no more wrinkles. Replace plug. Note: Valve for needle tips included.



Optional: Valve for needle/compressed air included. Replace for clear plug if desired.

# 1.4

Place Tower Pole over silver post on tFold-Out Stand.

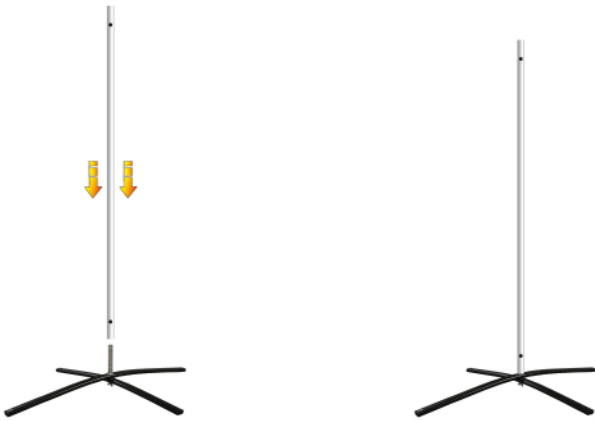

# 1.5

**A.** Connect Tower Extension using Connector Tube and stack 5 of the 6 Tower Cubes.

**B.** Place the Upper Key into the top of the Tower Extension until it clicks into place, locking the balloon to the Tower Pole.

**C.** Wrap top Tower Cube around top of Tower pole and below the balloon and attach velcro to complete the Printed Balloon Tower.

