


WindSpin™ Light Pole Flag Assembly

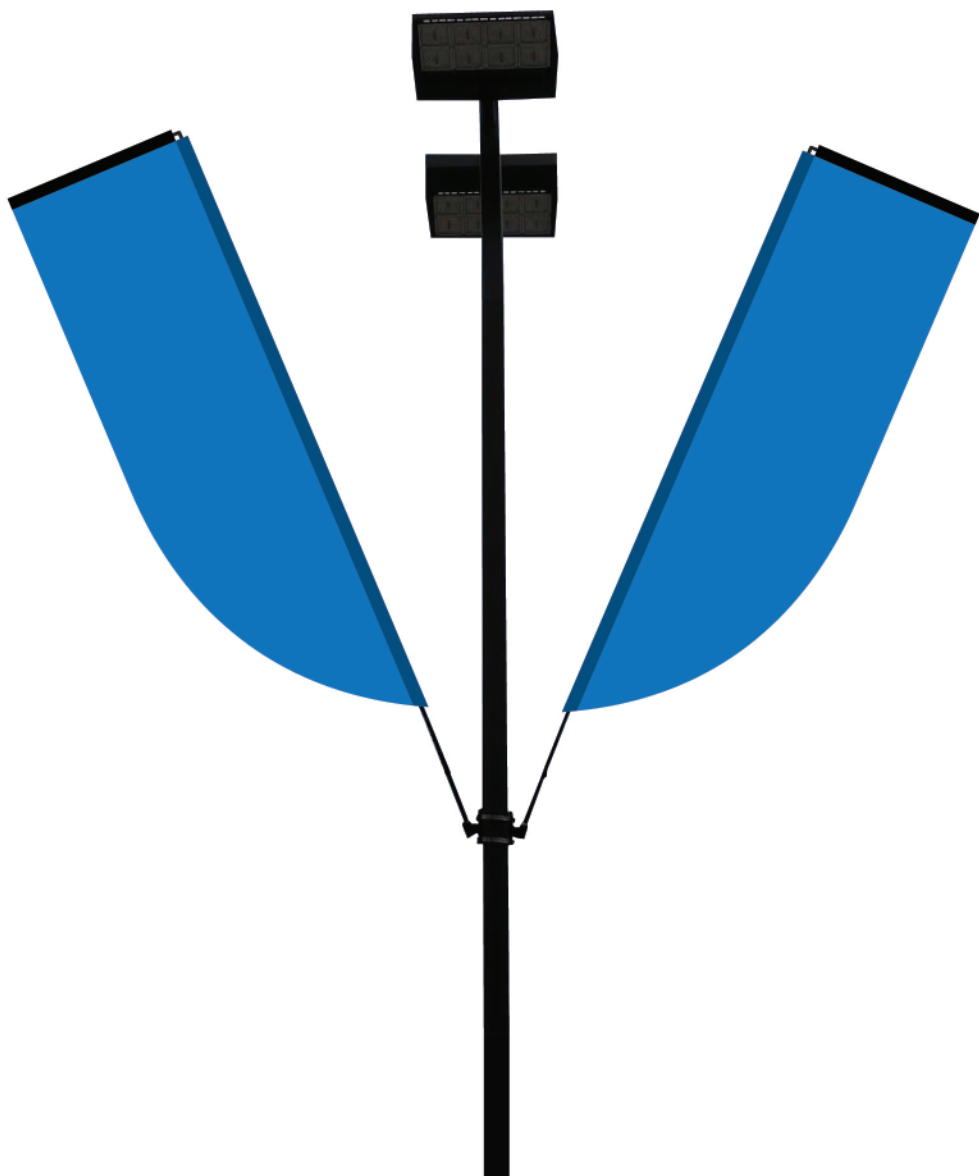

Please assemble flag kit within 30 days of purchase to comply with Warranty Guidelines.

WHAT YOU'LL NEED

Flag Poles



WindSpin™ Flag



Mounting Options



Vertical
WindSpin™ Bracket



Angled
WindSpin™ Bracket


1 Assemble all three straight fiberglass poles (B, C and D) making sure they fit snugly together.

2 Slide the Arm Pole (A) through the Horizontal Arm Sleeve (F), then slide the connected poles you just assembled through the Vertical Pole Sleeve (E) in the WindSpin™ Flag.

STEP 1



STEP 2

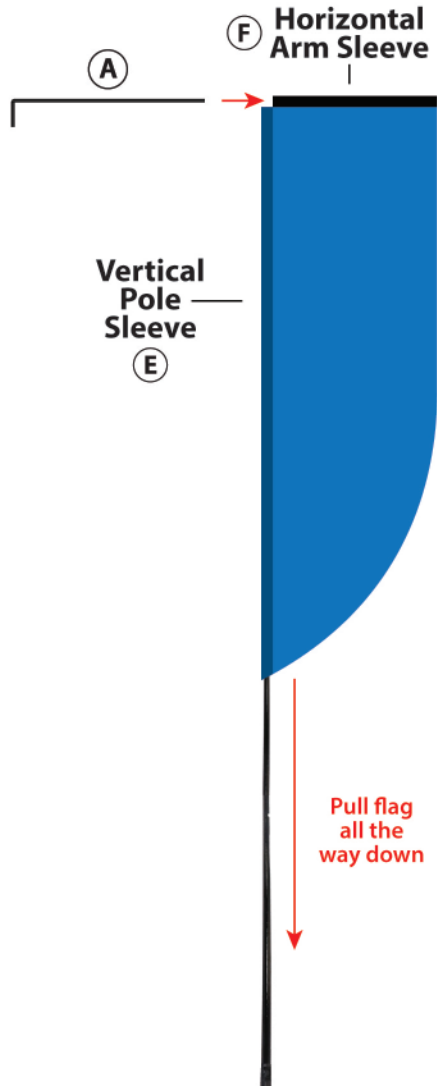

- 3** Run each band clamp through the slots in the WindSpin Bracket (two WindSpin Brackets can be used with one set of band clamps) and around the pole. Lift the tightening screws perpendicular to the band clamp and run the end of the band clamp through the screw housing. Pull tight and push the screw down parallel to the strap to lock it in place. Slide assembly to where the top of the flag will be in its final placement.

With a 5/16" (or 8mm) drill bit, nut driver, or screwdriver, tighten the 2 band clamps around the pole to ensure it doesn't come loose. Leave room between band clamp screw housing and the bracket for movement while tightening. If pole is square, avoid tightening where screw housing final position is on a corner. It's final position should be on a flat section of pole.



- 4** Pull the bungee cord down so there's tension on the flag and attach to the hook. Then place the entire flag assembly on the ball bearing post of the WindSpin bracket.



NOTE: Wrap the bungee cord around the hook several times to tighten as needed.