


FEATURES

- LED digital display clearly indicates parameter for easy reading.
- Built-in microcomputer controller to set temperature respectively for each layer and independent power switch for each layer saves power consumption cost by turning off switch for layer not being used.
- Each layer (front and back) is equipped with 2 independent timers to set warming time between 1 second to 99 minutes 59 seconds for different kinds of foods. Each timer controller will not affect other timers' operation. Special design for crispy or moist food by different layer storage.
- Alarm alert gives signal to remind warming time.
- WTC heat patch and aluminum heating plate make heating evenly and constant to efficiently save power consumption up to 30%.
- Front and back pass-through food access with timer indicating the same warming time.
- Heat tolerance is up to 190°C, securing food safety.
- Durable stainless steel body is easy to clean.

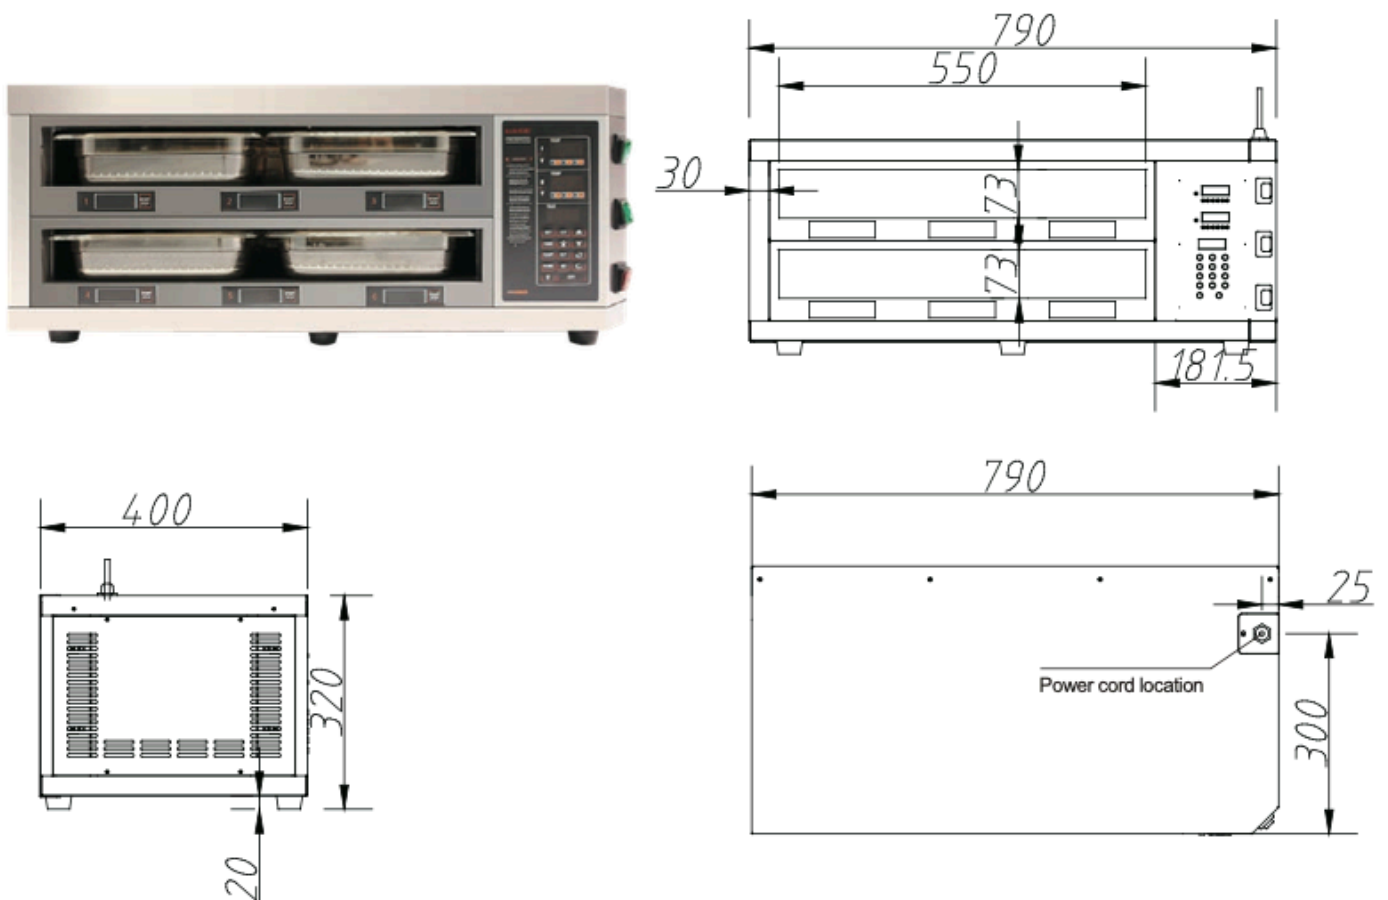

Product Name	Model	W*D*H (mm)	Power	Capacity	Temp. Range
2-Layers Holding Cabinet (Pass-Through Counter Type)	AWHS-790-2	790*400*320(mm)	240V 15A 50Hz 2.2KW	2Layers	Room Temp. to 100°C