

USER MANUAL

Model: Epower-99A



ves-per.com

Für die deutsche Beschreibung, können Sie von der Handbuchseite unserer Website herunterladen: ves-per.com/user-quide

Пожалуйста, перейдите на страницу руководства на нашем официальном сайте, чтобы загрузить русскоязычную версию руководства:yes-per.com/user-auide


Pour la version française du manuel d'utilisation, veuillez le télécharger à partir de la page du manuel d'utilisation de notre Site Officiel : yes-per.com/user-guide

日本語取扱説明書については、公式サイトの取扱説明書 ページからダウンロードしてください: yes-per.com/user-auide



USER MANUAL


Thank you for choosing the Yesper Monster Start! Always follow basic safety precautions when using electrical appliances. Read all instructions carefully, Please keep this instruction manual for easy reference.



B.OPERATION GUIDANCE LCD Display Description

1. The power display:

2. The products charge:

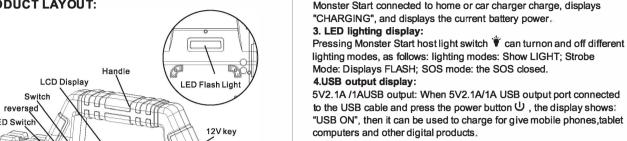

5. Output short-circuit show: It shows that car battery are shortcircuit of output when "WARNING SHORT CIRCUIT CHECK ALL CONNECTIONS" appears in screen. At this time, the start is prohibited And remove the jumper cable, and keep pressing power button U 3S to deal with question. If question not to be dealt with, pleasecall professionals to check.

Press switch button $\dot{\mathbf{U}}$,display "BATTERY". also shows the host

power. XX%, indicates that the battery has a XX% of the electricity:

indicates that Monster Start power is low, please charge.

100%, indicates that full power; display "BATTERY LOW RECHARGE".

6.12V/ 24V output display: 1. Press 12V key, displays "12V JUMP START READY"; 2. Press 24V key, displays"24V JUMP START READY".



Monster Start Charging Instruction:

- 1. Connect the USB cable with the home adaptor and then plug the home adaptor into the universal socket.
- 2. Connect the Type-C connector to the Monster Start host



Jump Start Vehicle Instruction:

- 1.Make sure the numbers LCD Display is not less than 20%. 2. Connect the RED clamp to the vehicle's battery positive (+) termina and connect the BALCK clamp to the vehicle's battery negative (-) terminal. If the battery clamp of the product is connected to the battery reversely, the REVERESD light will be on and beep. At this time, it should be prohibited to start, unplug the battery clamp, and reconnect the battery clamp correctly.
- 3. When jump start 12V car, host diaplays "12V JUMP START READY". when jump start 24V car, host diaplays "24V JUMP START READY", 4. Start the vehicle.
- 5. When the vehicle is started, remove the jumper cable from Jump Starter and disconnect RED and BALCK clamps from the vehicle battery. Leave the vehicle's engine running.







When you can't start the car (no jump start response), please follow the steps as below:

1 please check whether the battery clip is connected to the car battery positive and negative pole, such as connection error, the product doesn't to supply power to the car battery, please confirm the connection is correct, and then try to start again. 2. If clamps connected is correct, but still can't start the car, please check the car battery if it is completely damaged (no voltage or low voltage), If it is completely damaged, please correctly choose corresponding keys, according to the vehicle battery voltage. When jump start 12V Car, the host displays "12V jump start ready". you can start the car directly, if it shows "12V", no any display or others on the LCD display, please disconnect the car connection wire from the positive terminal of car battery, then use the clamps to clip on the positive and negative of car connection wire, and press "12V"button 3 seconds to start, the host displays will shows "12V jump start ready", then you can connect the car battery and start the car again. When 24V Car starts, the host displays shows "24V jump start ready", you can start the car directly. if it shows "24V", no any display or others on the LCD display, please disconnect the car connection wire from the positive terminal of car battery, then use the clamps to clip on the positive and negative of car connection wire. and press "24V" button 3 seconds to start, the host displays will shows "24V jump start ready", then you can connect the car battery and start the car again.

Do not choose the wrong button, otherwise it will cause damage to cars and products, and even lead to dangerous situations. 3. If the above operation is still no start response, please check whether there are other troubles among the cars

Charging Cell Phone or Tablet Instruction:

- 1. Plug the switch cable to USB 5V output port. 2. Select appropriate connector and connect it to your mobile phones or tablet.
- 3. Press the switch button to charge



For power supply to 12V vehicle products or 12V electronics 1.When 12V electronics/automotive products connected to the cigarette

Press the switch button to power supply

LED flash light

Press the switch 3 seconds to start the LED flash light. There are 4 modes of LED light appear in order (normal. strobe. SOS. off) if you press slightly.

D. TECHNICAL SPECIFICATIONS:

C. PARTS LIST

1 Host

Parts Name

3 User Manual

Switch cable



E. FAQ:

- Q. How the jump starter identity that the car are the 12V or 24V? A. Our jump starter can automatically identify in normal, but when car battery are under low volt, we should press the switch three seconds. (attentaion to the corresponding volt) to start the car.
- Q. When the jump starter can not automatically identify the car battery voltage when how to do?
- A. Please request to help auto manufacturers or related professionals.

- Q. How many times can this appliance to jump start the vehicle? A. Normally it can jump start 12V vehicle approx. 40 times. can jump start 24V vehicle approx. 30 times
- Q. How long time to full charge the Monster Start? A. Approx. 10 hours through the Quick Charge input port.
- Q. How many times can this appliance charge for my cell phone? A. Depend on the battery capacity of your cell phone. Take iPhone6 as an example, can full charging 11 times.
- Q. How about the lifetime of this appliance? A. About 3-5 years.
- Q. How long does the battery last after fully charged? A. 6-12 months, however, we suggest you recharge it every 3 months.

F. TROUBLE SHOOTING:

Finding	Cause	Remedies
No response when pressing the switch button.	Low voltage protection of Jump Starter is started.	Plug the adapter into the Quick Charge Input port to activate.

G.TOXIC AND HARMFUL SUBSTANCES:

Pb	Hg	Cd	Cr(Vi)	PBB	PBD
0	0	0	0	0	0

H. WARNING:

- 1.Read the instruction manual carefully before using this unit. 2. Jump for 12V/24V vehicles, it would be hazard if for other
- 3.DO NOT use this unit if any cable clamp or cord is damaged.
- 4 DO NOT use in place of a vehicle battery. 5. Never remain the unit on car battery after cranking the car
- 6.Make sure to check all the battery connections are CLEAN before Jump Starting! Make sure the battery clamps are well connected! If the battery terminals on the vehicle are dirty or corroded, the power of the unit will be lessened.
- 7.Do NOT Jump Start more than 3 times in a row. It could damage the unit by overheating. When starting up multiple times, each start-up interval is two minutes.
- 8. Remove the product from the vehicle battery within 30 seconds of Jump Starting. If not, it could lead to damage 9.Do NOT connect the two clamps together.
- 10.Do NOT use by young or infirm persons without supervision I1.Do NOT use as a toy.
- 12.Do NOT allow the product to become wet.
- 13.Do NOT immerse the product in water.
- 14.Do NOT operate the product in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.
- 15.Do NOT modify or disassemble Monster Start. Only a repair
- technician may repair this unit. 16.Do NOT expose product to extreme heat or fire.
- 17. Make sure someone should be within range of your voice or close enough to come to your aid when working with batteries. 18. Remove personal metal items like rings, bracelets, necklaces.
- etc. When using the products. 19.Do NOT drop unit. If unit receives a sharp blow or is otherwise damaged in any way have it checked by a qualified battery
- 20.Do NOT store in locations where the temperature may exceed

21. Charge only at ambient temperature between 0°C and 45°C. 22. Charge only using the charger provided with this unit or the

- same standard with the host input port. 23.Do NOT use the unit to jump start a vehicle while charging the
 - internal battery. 24. If this unit is leaking liquid dispose of at proper recycle facility immediately.
- 25. Under extreme conditions, battery leakage can occur. If a liquid is noticed coming from product do not handle with bare hands. In case of skin contact wash with soap and water immediately. If liquid comes in contact with eves rinse eves with cold running water for at least 10 minutes and get medical
 - attention immediately. 26. Product contains lithium based battery, at end of product life dispose of product according to local regulation.
 - 27 After jump start the car don't charge this unit immediately 28. Don't use the jumper cable to charge other equipments.

- 9. Consumable components such as batteries are not covered by the warranty.



I. WARRANTY INFORMATION: J. WARRANTY INFORMATION: ·12+6 Months Online After- Sales Service

- 1.We offer a limited warranty for this product against any defects in material and workmanship for a period of 6 months from the date of purchase by the end user/consumer. The conditions of the warranty are as follows:
- 2. The warranty is only valid upon presentation of the original receipt (from dealer/retailer) by the original purchaser with the product to be repaired or replaced.
- 3. The warranty is void if the serial number, date of purchase and
- 4. The warranty does not cover damage or product failure resulting from normal wear and tear, physical abuse, improper installation, misuse, modification or repairs by unauthorized
- 5.We do not assume responsibility for any loss or damage incurred during shipment or as a result of a force majeure.

6. We are not liable for any incidental or consequential damages arising from the use or misuse of this product.

- 7.All warranty claims are limited to repair or replacement of the defective product and at the sole discretion of us.
- 8.If we repair or replace the product, the product will be covered for the remaining time of the original warranty period. Repair or replacement may involve the use of reconditioned units which are equivalent in function. Replaced part or product becomes the property of us.

register on our official store: yes-per.com and become our member customer, you will get extra 6 months service, total 18 month.



Within 12 months, we will provide timely and effective

online after- sales service after your purchase. If you

Scan to be our member for extending more 6 months warranty

·30 Days Money Back Guarantee

return for it through YOUR SELLER when you have any

·30 Days to 12 Months (18 Months for Member

We will replace the defective unit due to manufacturing member customer, within 18 months.



Do Not Submerge In Water



Within the first 30 days after your purchase, you can apply

issues with a new one within 12 months; if you are our

∕! \ Attention





Do Not Disassemble



Do Not Drop



Avoid Extreme Temperatures



Protection







Customer Service



12+6 Months Limited Warranty Service

Lifetime Technical Service



cs@yes-per.com

Feel Free to Contact Us



For FAO and More Information yes-per.com



Thank You for Choosing



Made in China

128g铜版双面单黑印刷风琴折

93*130mm