

USER MANUAL

Model: Yesper SPEED1550/2160/4120



yes-per.com







日本語

Für die deutsche Beschreibung, können Sie von der Handbuchseite unserer Website herunterladen: yes-per.com/user-quide

Пожалуйста, перейдите на страницу руководства на нашем официальном сайте, чтобы загрузить русскоязычную версию руководства:yes-per.com/user-quide

Pour la version française du manuel d'utilisation, veuillez le télécharger à partir de la page du manuel d'utilisation de notre Site Officiel : yes-per.com/user-guide

日本語取扱説明書については、公式サイトの取扱説明書 ページからダウンロードしてください: yes-per.com/user-guide








日本語

Thank you for choosing the Yesper SPEED1550/2160/4120! Always follow basic safety precautions when using electrical appliances. Read all instructions carefully. Please keep this instruction manual for easy

USER MANUAL

A.PRODUCT LAYOUT:

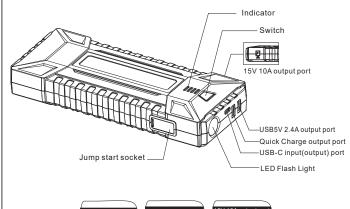

Jump Start 12V Vehicle Instruction: 1. Connect the blue plug fully seated into the host. and make sure the Cable Indicator is off. 2.Connect Red Clamp to the positive (+) battery terminal, Black Clamp to the negative (-) battery 3. Operate following the instruction of the Cable

B.OPERATION GUIDANCE


Indicator
Press the switch to check the storage level of Epower.

Indicator	Unlit	1 solid	2 solid	3 solid	4 solid
Storage level	0%	25%	50%	75%	100%


The indicator will flash one by one during the period of charging. Different number of solid indicators show different storage level of Yesper SPEED1550/2160/4120. All indicators light off when the charging is paused or completed.

EPower Charging Instruction:

1. Plug a home adaptor into the universal socket. 2. Connect USB-C input port of Yesper SPEED1550/2160/4120 to the other








4. Start the vehicle.

5. When the vehicle is started, remove the jumper cable from the vehicle battery. Leave the vehicle's engine running.

Charging Cell Phone or Tablet Instruction:

- 1. Plug the switch cable to Quick Charge output port. 2. Select appropriate connector and connect it to your mobile
- 3. Press the switch button to charge.
 4.If doesn't work, please try another USB Output port.



For Power Supply to Vehicle Products or Electronics 1. Plug the optional switch cable to 15V 10A output port. 2. Connect the optional switch cable and vehicle product or

3. Press the switch button to power supply.

LED Flash Light
Press the switch 3 seconds to start the LED flash light. There are 4 modes of LED light appear in order (normal. strobe. SOS. off) if you press slightly.

C. PARTS LIST:

#	Parts Name	Quantity	#	Parts Name	Quai
1	Host	1	4	Intelligent jumper cable	1
2	USB to USB-C cable	1	5	User Manual	1
3	EVA BOX	1	6	Cigarette lighter socket adapter	1

D. TECHNICAL SPECIFICATIONS:

Operating temperature: -20°C ~ 60°C

Model: SPEED1550
Size: 175*89*36mm
Weight: 480g
Battery Capacity: 12000mAh(44.4Wh)
Output: USB-C(5V/3A); Quick Charge(5V/3A;9V/2A;
12V/1.5A); 5V/2.4A; 15V/10A; 12V jump start
nput: Type-C 15W(5V/3A)
Full charging time: 4 hours
Peak current: 1550A

Battery Capacity: 16000mAh(59.2W) Output: Quick Charge(5V/2.4A; 9V/2A; 12V/1.5A);5V/2.4A; 15V/10A; Type-C 15W(5V/3A) 12V jump start

Model: SPEED4120 Size: 224*89.6*43.8mm Weight: 775g Battery Capacity: 24000mAh(88.8Wh) Output: Quick Charge(5V/2.4A; 9V/2A; 12V/1.5A);5V/2.4A; 15V/10A; Type-C 15W(5V/3A) 12V jump start Full charging time: 8-9 hours

E. FAQ:

Peak current: 4120A

Operating temperature: -20°C ~ 60°C

Model: SPEED2160

Weight: 625g

Size: 224*89.6*36mm

Input: Type-C 15W(5V/3A)

Full charging time: 5-6 hours

Operating temperature: -20°C ~ 60°C

- Q. How to turn off this appliance? A. This appliance will power off automatically when no load or charging is complete
- Q. How long time to full charge the Yesper SPEED1550/2160/4120? A. 4/5-6/8-9 hours through the USB-C for SPEED1550/2160/4120

Customer Service

Q. How many times can this appliance charge for my cell phone? A. Depend on the battery capacity of your cell phone. Please go to our official website yes-per.com to view the most detailed information.

Q. What's the lifetime of SPEED1550/2160/4120?

Q. How long does the battery last still can jump start the car after A. 6-12 months, however, we suggest to recharge it every 3

F. TOXIC AND HARMFUL SUBSTANCES:

Pb	Hg	Cd	Cr(Vi)	PBB	PBDE
0	0	0	0	0	0

below the MCV limit specified in the Standard 2002/95/EC(RoHs).

G.TROUBLE SHOOTING:

TROUBLE	REASON	REMEDIES
It has charged for a long time, but the fourth battery indicator is still blinking.	Battery power recognition problem.	Disconnect the charging cable and plug it in again, try to continue charging for hours.
No response when pressing the power switch.	Low voltage protection is started.	Try to charge the unit with wall charger to activate it.
This unit can not be charged, the first battery indicator blinks all the time.	The unit is over discharged or defective	Please contact us: cs@yes-per.com
This unit is over heated or swelled.	The unit is over discharged or defective.	Please contact us: cs@yes-per.com

If there is any other problem with this unit, please contact us directly at cs@yes-per.com, we will do our best to solve the problem within 24

H. WARNING:

- 1.Read the instruction manual carefully before using this unit. 2. Jump for 12V vehicles, it would be hazard if for other jumping 3.DO NOT use this unit if any cable clamp or cord is damaged. 4.DO NOT use in place of a vehicle battery.
- 5. Never remain the unit on car battery after cranking the car 6. Make sure to check all the battery connections are CLEAN
- before Jump Starting! Make sure the battery clamps are well connected! If the battery terminals on the vehicle are dirty or corroded, the power of the unit will be lessened.
 7.Do NOT Jump Start more than 3 times in a row. It could
- damage the unit by overheating. When starting up multiple times, each start-up interval is two minutes. 3. Remove the product from the vehicle battery within 30
- seconds of Jump Starting. If not, it could lead to damage. 9.Do NOT connect the two clamps together. 10.Do NOT use by young or infirm persons without supervision.
- 11.Do NOT use as a toy.
- 12.Do NOT allow the product to become wet.
- 13.Do NOT immerse the product in water.
- 14. Do NOT operate the product in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.

 15.Do NOT modify or disassemble Yesper SPEED1550/2160/4120.
- Only a repair technician may repair this unit. 16.Do NOT expose product to extreme heat or fire.
- 17. Make sure someone should be within range of your voice or close enough to come to your aid when working with batteries. 18.Remove personal metal items like rings, bracelets, necklaces, etc. When using the products.
- 19.Do NOT drop unit. If unit receives a sharp blow or is otherwise damaged in any way have it checked by a qualified battery technician.
- 20.Do NOT store in locations where the temperature may
- 21.Charge only at ambient temperature between 0°C and 45°C. 22. Charge only using the charger provided with this unit or the same standard with the host input port.

23.Do NOT use the unit to jump start a vehicle while charging the

- internal battery. 24. If this unit is leaking liquid dispose of at proper recycle facility immediately.
 25.Under extreme conditions, battery leakage can occur. If a
- liquid is noticed coming from product do not handle with bare hands. In case of skin contact wash with soap and water immediately. If liquid comes in contact with eyes rinse eyes with cold running water for at least 10 minutes and get medical attention immediately.
- 6.Product contains lithium based battery, at end of product life dispose of product according to local regulation. 27. After jump start the car,don't charge this unit immediately.
- 28. Don't use the jumper cable to charge other equipment

. WARRANTY INFORMATION:

1. We offer a limited warranty for this product against any defects in material and workmanship for a period of 6 months from the date of purchase by the end user/consumer. The conditions of the warranty are as follows

2. The warranty is only valid upon presentation of the original receipt (from dealer/retailer) by the original purchaser with the product to be repaired or replaced.

3. The warranty is void if the serial number, date of purchase and

4. The warranty does not cover damage or product failure resulting from normal wear and tear, physical abuse, improper installation, misuse, modification or repairs by unauthorized

5.We do not assume responsibility for any loss or damage incurred during shipment or as a result of a force majeure.

6. We are not liable for any incidental or consequential damages arising from the use or misuse of this product. 7.All warranty claims are limited to repair or replacement of the

defective product and at the sole discretion of us

8.If we repair or replace the product, the product will be covered for the remaining time of the original warranty period. Repair or replacement may involve the use of reconditioned units which are equivalent in function. Replaced part or product becomes the property of us.

9. Consumable components such as batteries are not covered by











J. WARRANTY INFORMATION:

·12+6 Months Online After- Sales Service

Within 12 months, we will provide timely and effective online after- sales service after your purchase. If you register on our official store; ves-per.com and become our member customer, you will get extra 6 months service, total 18 month.



Scan to be our member for extending more 6 months warranty

·30 Days Money Back Guarantee

Within the first 30 days after your purchase, you can apply return for it through YOUR SELLER when you have any

·30 Days to 12 Months (18 Months for Member

We will replace the defective unit due to manufacturing issues with a new one within 12 months; if you are our member customer, within 18 months.

∕ ! \ Attention



Do Not Submerge In Water



Do Not Disassemble





Avoid Extreme Temperatures

Do Not Place Near or Into Fire



Protection









For FAQ and More Information

Lifetime Technical Service

Feel Free to Contact Us

cs@yes-per.com

L2+6 Months Limited Warranty Service



Thank You for Choosing



128g铜版双面单黑印刷风琴折

93*130mm