# prolink

# 51W 2-Port PD USB Car Charger

#### PCC24501



prolink R R R

With **Prolink PCC24501**, you can charge mobile devices from smartphones to tablets quickly and efficiently with a total output of 51W Type-C PD 3.0 PPS port and Quick Charge Type-A port.

Equipped with unique all-rounded safety features and designed with a luminous LED ring light that makes it easy for drivers to access the charging ports without ever taking eyes off the road, this car charger is the perfect companion on your next road trip ensuring maximum ease of mind during use.

#### Key Features



**Dual-Port Fast Charging\*** Get up to 50% battery in only

30 minutes via the USB Type-C port and 4x faster charging speed boost via the Quick Charge Type-A port.



#### Safe & Fast Speed Charging

Engineered with Prolink's IntelliSense savvy charging system that automatically detects and distributes the right amount of charging current for every device, so you never need to worry about overcharging or damaging your devices.



#### Modern & Compact Design with LED Light

\*Only for compatible devices only


Drive with style and feel safe at night with the LED ring light, which provides a relaxing white glow in the dark making it easy for you to access the charging port.



#### **Advanced Protection**

With unique, all-rounded safety features capable of protecting devices against over-voltage, over-temperature, over-current, overload and short circuit.

## Power Delivery 3.0 & Quick Charge 3.0

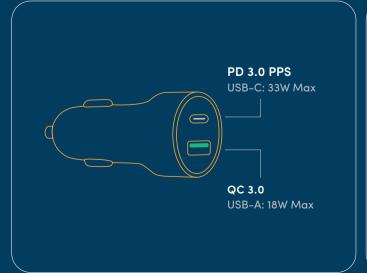





## Specifications

| Output 1 & 2        | USB Type-C PD 3.0           | 3.3V-11V/3A, 5V/3A, 9V/3A,<br>12V/2.5A (33W Max)   |
|---------------------|-----------------------------|--|
|                     | USB Type-A QC 3.0           | 3.6V-6.5V/3A, 6.5V-9V/2A,<br>9V-12V/1.5A (18W Max) |
| Input               | DC 12V-24V                  |  |
| Advanced Protection | Over-Voltage Protection     | $\checkmark$                                       |
|                     | Over-Current Protection     | $\checkmark$                                       |
|                     | Over-Temperature Protection | $\checkmark$                                       |
|                     | Short-Circuit Protection    | $\checkmark$                                       |
|                     | Overload Protection         | $\checkmark$                                       |
| Dimension           | 65mm x 28mm x 28mm          |  |
| Weight              | 23g±3g                      |  |

Ver1.0\_12.08.2022

Authorised Distributor/ Reseller:

Prolink is a registered trademark of Fida International (S) Pte Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Product images are purely for illustrative purposes and may defer from the actual product. Specifications are subjected to changes without prior notice. Copyright © 2022 Fida International (S) Pte Ltd.