


#### **SNMP Web Pro Card**

- Built-in web server
- Spport EMD monitoring and SMS service
- Built-in 512MB flash memory to save more than 6 million threads
- Low power consumption



# **System Diagram**

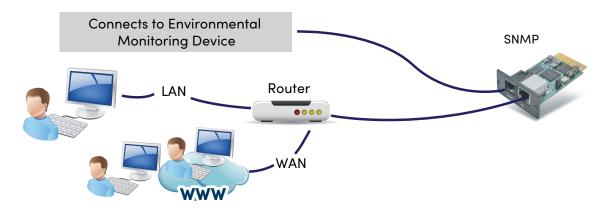

# **Specifications**

MODEL	SNMP Web Pro 2.0
Protocol Support	TCP/IP, UDP, SNMP-V1, SNMP-V2,SNMP-V3, HTTP, HTTPS, SMTP, IPv4/IPv6,SSL,SSH, TLS, SNTP
UPS Slot Type	Golden Finger
Network Support	RJ45 10/100/1000BaseT
Supported MIB	RFC1213, RFC1628, RFC43943
LED	10 LAN : Yellow off ; 100 LAN : Yellow on ; 1000 LAN : Yellow flash
Supported OS	Windows family, Linux and MAC
Supported Extension Devices	Environmental monitoring device * Temperature and humidity sensor * Two dry contacts
Data Log	6,800,000 threads
Event Log	6,800,000 threads
Power Consumption	1.4 watt (max.)
Operating Temperature	0 ~ 50°C
Operating Humidity	0 ~ 95%
Dimension, D X W X H (mm)	79 x 52 x 25
Product Net Weight (kg)	0.02

Product specifications are subject to change without further notice.

### **Monitoring Software**



 $\label{thm:linear_power_problem} \mbox{ViewPower Pro is an advanced power management software to remote monitor and manage from one}$ to multiple UPSs in a networked environment including LAN, INTERNET and RS485-based networks. Integrated with Shutdown Wizard, it can not only prevent data loss from power outage and safely shutdown systems, but also store programming data and scheduled shut down UPSs.