



Note: If you are inserting your wine rack in to a 'nook', measure the available height & width and refer to sizing chart below for the required number of 'nooks'. This will be the amount and configuration you will need to fill your space and build your wine rack. (Note, please refer to our 'design guidelines' for some important information about safely constructing your NOOK wine rack). Locate a large and flat surface to construct your wine rack. It's recommended to place a towel over the flat surface to protect from any potential marking while assembling your wine rack

1 Insert one metal support (a) into a polymer bottle rest (b). This is achieved by pushing the metal part in firmly by hand – note, it will not push all the way in. This is OK as it will be tapped in with the mallet in the final assembly steps.



2 Repeat Step 1 and assemble to the first pair of components you assembled in step 1. Continue repeating step 1 and 2 and build the rack from left corner to right corner.




3 Once all the metal supports have been inserted on this side, using a rubber or plastic mallet, tap in each metal part so they are inserted ALL the way into the polymer bottle rest. It is critical for safety reasons that all of these parts are inserted all the way in as far as they can go.



4 Turn the wine rack around and insert the metal supports into the second side of the polymer bottle rest by hand. Once all the metal components have been inserted, using the mallet, tap in each metal part so they are inserted all the way into the polymer bottle rest.



5 Place into your nook, fill it with wine and enjoy your custom creation!

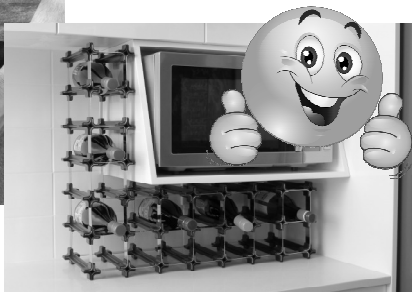

Design & Assembly Guidelines

If you are building a tall and narrow wine rack that is only 1 or 2 rows horizontally (see image A), use wall saddles every 2ft or 60cm in height.

Do not use a metal hammer to tap metal supports in as it will damage them.

Minimum number of rows unsupported is 2 and do not have any more than 3 'nooks' wide (see Image B).

Use our wall saddles every 4' or 1.2m in height.

To distribute the weight evenly, only use flat hard flooring. Do not use on soft carpet or uneven floors.

Please refer to our other manual for installation of large size wine racks.

Ensure that your configuration is stable and robust before putting wine in it. If in doubt, contact us via our website.

When disassembling, gloves are recommended to remove metal supports.

NOOK will accommodate almost all bottle sizes but care should be taken when inserting narrow and long bottles to ensure the bottle rest correctly.

NOOK has only two parts that repeat themselves, you can purchase any size box to add additional NOOK's.

The weight of each NOOK is 20g (Example 9 NOOK's = 180g + weight of wine)

Wine Rack size chart

No pockets in row	Outer width/height (mm)	Outer width/height (in)	Cabinet internal height for additional top bottle (mm)	Cabinet internal height for additional top bottle (in)
1	135	5.3	210	8.3
2	230	9.1	305	12.0
3	325	12.8	400	15.7
4	420	16.5	495	19.5
5	515	20.3	590	23.2
6	610	24.0	685	27.0
7	705	27.8	780	30.7
8	800	31.5	875	34.4
9	895	35.2	970	38.2
10	990	39.0	1065	41.9
11	1085	42.7	1160	45.7
12	1180	46.5	1255	49.4
13	1275	50.2	1350	53.1
14	1370	53.9	1445	56.9
15	1465	57.7	1540	60.6
16	1560	61.4	1635	64.4
17	1655	65.2	1730	68.1
18	1750	68.9	1825	71.8
19	1845	72.6	1920	75.6
20	1940	76.4	2015	79.3




Image A