WAUKESHA Series 200 CENTRIFUGAL PUMPS

● = Best Efficiency Point
% = Efficiency Percentage

CAPACITY CURVES

Based on water at 70°F. (22°C.)

MODEL: 2065LV
50 Hz 2900 RPM
SIZE: 2-1/2 x 1-1/2 x 6-1/2

CUBIC METERS PER HOUR

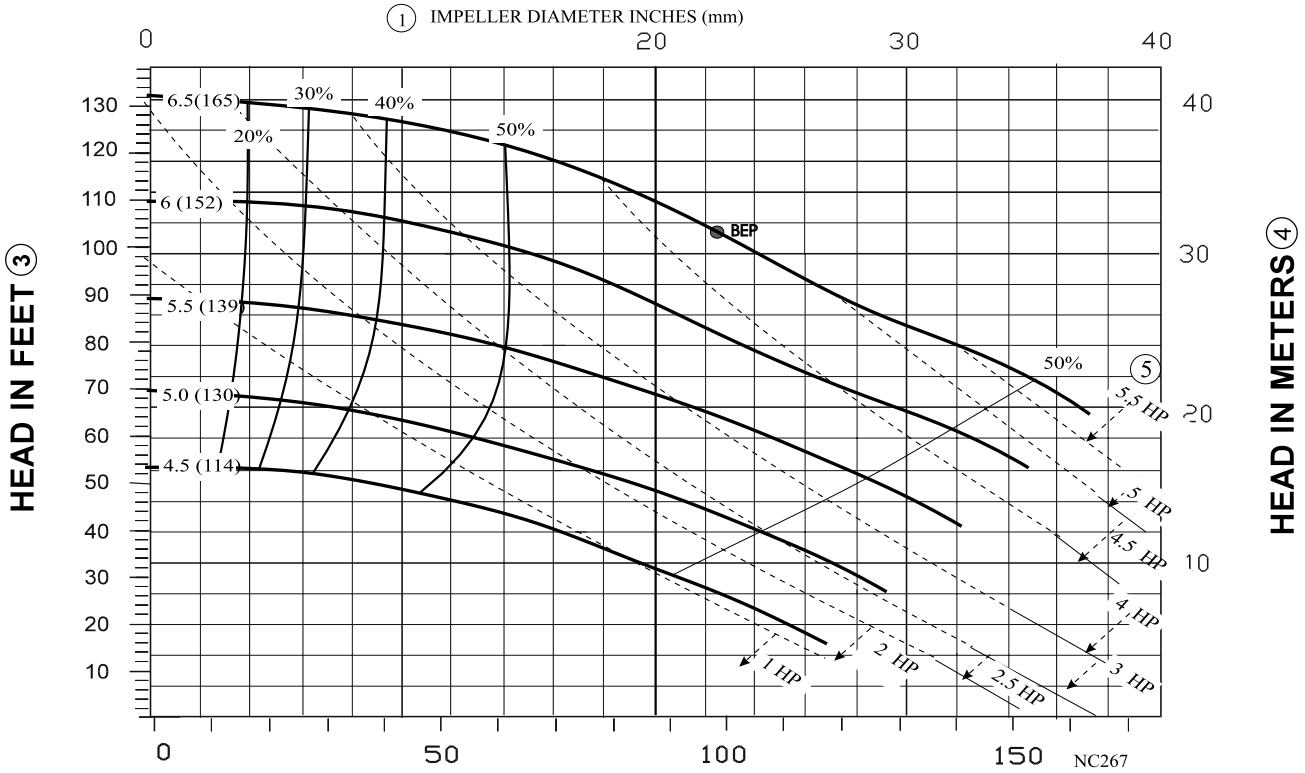

US GALLONS PER MINUTE

CUBIC METERS PER HOUR

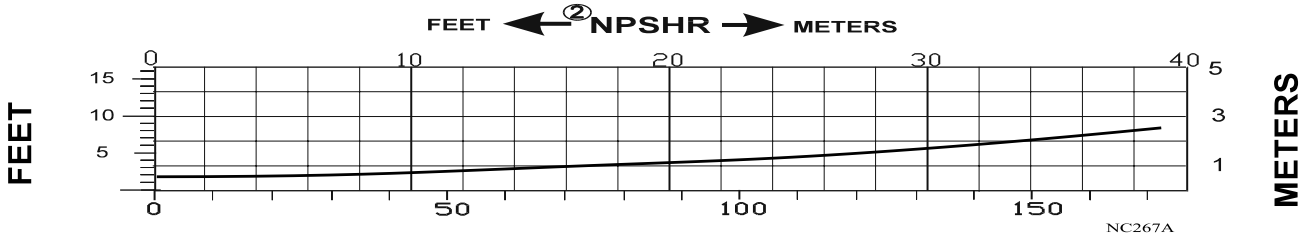

US GALLONS PER MINUTE

NOTES

1. Impeller diameters available in 1/16-inch increments
2. NPSHR is shown for maximum impeller diameter
3. PSI = $\frac{\text{Head in Feet X Specific Gravity}}{2.3}$
4. Kg/cm² = $\frac{\text{Head in Meters X Specific Gravity}}{10}$
5. HP x 0.746 = Kw

611 Sugar Creek Road Delavan, WI 53115
Phone: 262-728-1900 Fax 262-728-4904
www.spxflow.com/wcb

SPXFLOW

Waukesha Cherry-Burrell