

# INSTRUCTIONS FOR USE

TANDYPRO® STRAP EDGE BEVELER

3985-00


tandyPro<sup>®</sup>  
MACHINES

## ATTENTION:

Machine needs to be screwed/bolted to a work surface for proper and safe use.

## ADJUSTING WIDTH:

1. Loosen T knob and tilt front end up a little to slide to the desired width.
2. Place strap between upright bars on top of spring loaded fingers.
3. Adjust so strap is snug between upright bars but is still easy to slide through.

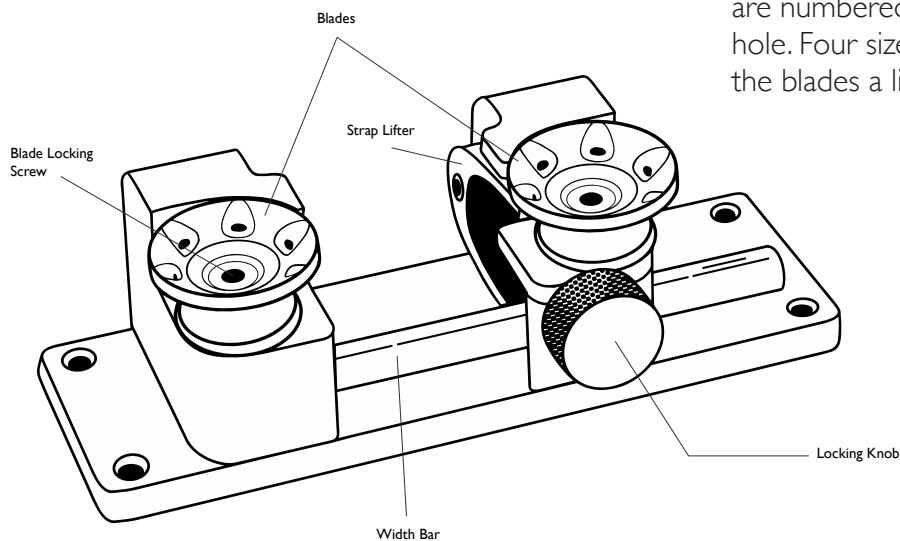

## STARTING THE STRAP:

Edge beveling firm leather; push through and pull strap from other side.

Edge beveling softer leather; use the hand held hook to pull strap through.

## POSITIONING THE BLADES:

Line up the back side of the oval hole with the end of the spring loaded finger. (See drawing) When blade is dull turn it to the next hole, you can do this 6 times then exchange sides and you can turn another 6 times before you have to sharpen the blades. The oval holes are numbered so you know when you are on the last hole. Four sizes of blades are available. You can also turn the blades a little farther to the front to take less off.

### WARNING:

CHOKING HAZARD: Small parts. For adult use only. This product is not intended for use by children. SHARP EDGES: Use extreme caution.

### ADVERTENCIA:

PELIGRO DE ASFIXIA: Piezas pequeñas. Solo para uso de adultos. Este producto no está diseñado para ser utilizado por niños. BORDES AFILADOS: Tenga mucho cuidado.

### AVERTISSEMENT:

RISQUE D'ÉTOUFFEMENT: Petites pièces. Pour usage adulte seulement. Ce produit n'est pas destiné à être utilisé par des enfants. BORDS SHARP: Soyez très prudent.



Customer Service: 877-LEATHER

[www.tandyleather.com](http://www.tandyleather.com)

TANDYPRO® STRAP EDGE BEVELER