




- Precision temperature control delivers consistent cooking results.
- Industry exclusive Marquise Accented[™] glass cooking surface presents an authentic visual connection to the Hestan design integrity.
- Slide touch controls offer smooth, precise selection of power.
- Low simmer allows for gentle cooking for even the most delicate of sauces.



Power Boost Option

- cookware is removed. When cookware is returned, original temperature setting is reestablished.
- · Locking feature provides additional safety and peace of mind.
- 2 Timer functions allow for an independent timer or a timer for each individual cooking zone from 1 to 59 minutes.
- · Automatic Power Boost heating function allows for elements to heat up more quickly to the desired heat setting.



- Bridge function for elongated pans.
- Audible alerts and feedback provide certainty of control interface.
- Clean and knobless Marquise AccentedTM control panel.
- Warming function maintains low temperature for extended periods.
- · Comes standard with Island Trim.
- · Available in black glass only.



KRTI36 with 10" KBGLB 36 optional backquard Model Shown




OPTIONS & ACCESSORIES


- Available in 12 Hestan signature color finishes
- Backguards: Low Back 10" and High Shelf 20"





INSTALLATION CLEARANCES - ALL BACKGUARDS

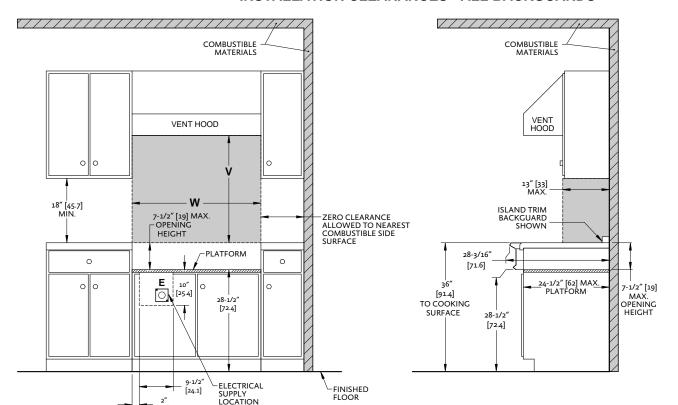



Key	Induction element size & power rating					
1	10-1/4"	[260 mm]	- 2600W (Booster 3700W)			
2	5-3/4"	[145 mm]	- 1400W (Booster 2200W)			
3	7"	[180 mm]	- 1850W (Booster 3000W)			
4	7-1/2" x 8-3/4"	[185 mm x 220 m	m] - 2100W (Booster 3700W)			
5	7-1/2" x 8-3/4"	[185 mm x 220 m	m] - 2100W (Booster 3700W)			
6	touch control					

FRONT VIEW

SIDE VIEW

NOTES:

SHADED AREAS INDICATE WHERE COMBUSTIBLE MATERIALS ARE NOT ALLOWED. APPLIANCE TOP MUST BE LEVEL OR HIGHER THAN THE ADJACENT COUNTERTOP SURFACES. "E" IS ELECTRICAL SUPPLY ZONE.

"W" IS APPLIANCE OPENING.

"V" IS MIN. CLEARANCE TO VENTILATION HOOD.

DIMENSIONS IN BRACKETS [] ARE IN CM.

RANGETOP MODEL	W	V _(MIN)	
KRTI36	36" [91.4]	30" [76.2]	

ELECTRICAL REQUIREMENTS:

208/240V, 60Hz, 50 amps

Hestan Indoor products are approved for indoor use only. Hestan Commercial Corporation reserves the right to change materials and specifications without notice. Please reference our Installation Instructions for more elaborate detail and as the main source in your dimensional planning.

ALL	5	Cutout Dimensions		Circuit	Approx
Models	Description	W (in.)	D (in.)	Breaker Req	SHP WT (lbs)
KRTI36	36" Induction Rangetop with 5 Elements	36"	24-1/2"	50 Amp	230













