

DBI664PHXXLS

General description

Turbo Drying
Mode of installation: Built In
Size: XXL
Number of baskets: 3
16 place settings
Top tray for bowls and cutlery
Upper basket type: Premium
Lower basket type: Premium
Separate removable cutlery basket

Construction and performance

8 Steel™ Construction
Guide rails with ball bearings for upper basket
Hidden heater
SCS+ - Super Cleaning System+™
Number of spray arms: 3
Number of spray zones: 9
Jet Spray™ - extra dishwashing power for tall objects
Wide Spray™ - extra washing power for pots and pans
Power Zone Cutlery™

Use and flexibility

16 place settings
Basket configuration: Premium
Basket levels: 3
Top tray for bowls and cutlery
Height adjustable upper basket
Separate removable cutlery basket
Tight mesh base in the baskets

Interaction and control

Display type: LCD display
Program names in full text
Number of programs: 11
Number of modes: 5
Delayed start: Delayed Start
Status LED light
Time remaining indicator
Wash end indication: Wash end indication
Light setting for display

Programs and options


11 programmes: Normal wash; ECO wash; Hygiene wash; Time; Plastic wash;
Rinse & Hold; Sanitation wash; Upper half wash; Lower half wash; Crystal glass;
Self-cleaning
Extra Dry
Variable start delay up to 24 hours
Green mode
Speed mode
Night mode
Intense mode
Normal mode

Design and integration

From front adjustable rear foot
Trim kit
Integrated anti-siphon device
Niche dimensions (HxWxD): 33 7/8" x 24" x 22 1/16"

Safety and maintenance

Aqua Safe™
Kid Safe™ - lockable controls
Rinse-aid indication: Rinse-aid indication
Stand-by water protection
Exterior float - detects water leakage on the base
Anti block drain pump
Steam Safe™

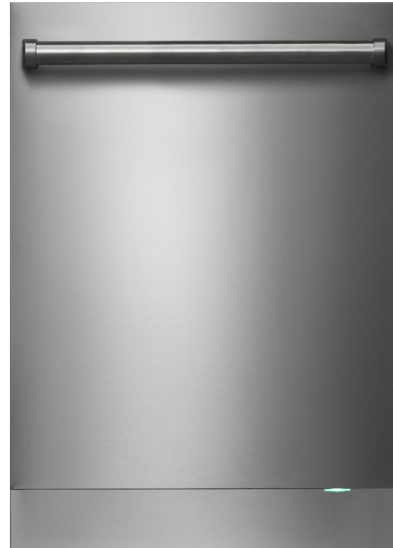

EAN code: 3838782059193
code: 728570

Technical data

Multi fit outlet hose
ECO connection
Noise level: 42 dB(A)
Estimated yearly energy consumption: 235 kWh
Energy consumption/cycle: 1 kWh
Consumption in off mode: 0,49 W
Consumption in standby mode: 0,49 W
Plug type: Type B
Connection rating: 1300 W
Voltage: 120 V
Number of phases: 1
Current: 15 A
Frequency: 60 Hz
Marked for recycling
ISO 14001

Dimensions

Product dimensions (HxWxD): 34" x 23 7/8" x 22" (864 x 606 x 559 mm)
Depth with door open: 48 3/4 (1238 mm)
Electrical cord length: 47 1/4 (1200 mm)
Inlet hose length: 64 3/16 (1630 mm)
Outlet hose length: 90 9/16 (2300 mm)

Logistic information

Dimensions of packed product (HxWxD): 36 5/8" x 25 3/16" x 26 3/4" (930 x 640 x 680 mm)
code: 728570
EAN code: 3838782059193