

Enjoy creamy nitrogen-infused coffee and refreshing still coldbrew coffee on demand. Nitrogen-infused coffee delivers the ultimate experience by infusing thousands of micro-nitrogen bubbles as the coffee is dispensed. This creates a natural slightly sweet taste and thicker and smoother texture. Simply fill the keg with your favorite cold coffee or tea.

Coffee Shop Quality at Home















Coffee Shop Quality at Home

Enjoy creamy nitrogen-infused coffee and refreshing still cold-brew coffee on demand. Nitrogen-infused coffee delivers the ultimate experience by infusing thousands of micro-nitrogen bubbles as the coffee is dispensed. This creates a natural slightly sweet taste and thicker and smoother texture.

Simply fill the keg with your favorite cold coffee or tea.

Key Features

- Dispenses still cold-brew and nitro-infused coffee
- Utilizes patent-pending JoeTap™ system
- Includes: refrigeration cabinet, dispensing tower with two tap heads, one 2.5 gallon coffee keg, nitrogen regulator, tubing and hardware, black tap handles, drip tray
- Convection cooling system provides a quick cool down and consistent temperature
- Temperature range: 34°F 60°F
- Full-depth lower interior
- Volume of 3.6 cu ft holds two 2.5, 3, or 5 gallon coffee kegs and nitrogen tank

- Stainless steel cabinet, grille, and full-wrap door
- Black interior
- Removable lower interior stainless steel liner
- Digital touch pad control with blue LED display
- Stainless steel handle (7/8" diameter)
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
- Adjustable leveling legs


MODEL DETAILS


Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UHDE215-SS03A	115 / 60	Field Reversible	Stainless Solid	80 lb

ACCESSORIES

Model	Description	Finish	Shipping Weight
ULANITROTANK	22 cu ft aluminum nitro tank	N/A	10 lb
ULACOFFEEKEG	2.5 gal coffee keg	N/A	6 lb
ULACASTERS	Set of 4 casters	N/A	6 lb
ULACOFFEECLEAN	Coffee Dispenser Cleaner (1 box of 5 packets)	N/A	1 lb

Front 50 1/16" (1,272 mm) 45 9%" (1,165 m) (876 mm) to 35 1/2" (902 mm) 15" (381 mm)

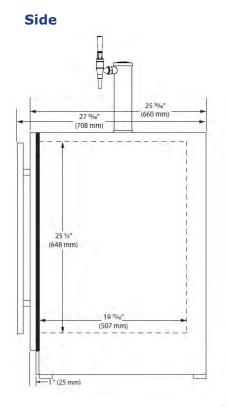


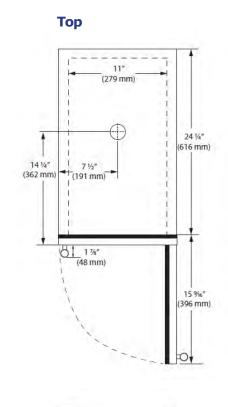


Specifications

Model	HDE215
Amps: Running	1.2
Capacity: Volume (cu ft)	3.6
Capacity: Keg (2.5 gal)	2
Dimensions: Product Depth	25 ¹⁵ / ₁₆ " / 660 mm
Dimensions: Product Height (Min.)	34 ½" / 902 mm
Dimensions: Product Width	15" / 381 mm
Energy Consumption: Avg. Per Year	290 kWh
Product Weight	80 lb
Refrigerant Type	R600a
Temperature Range	34°F - 60°F

Back





Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)
- 2 Year (parts & labor) / 5 year sealed system (parts) upgrade at no cost with product registration



See complete warranty for details





Installation Notes

Cabinet Cut-Out

- Power cord extends 2" beyond total depth
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow

Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.