



# BMX LAUNCH INSTRUCTIONS

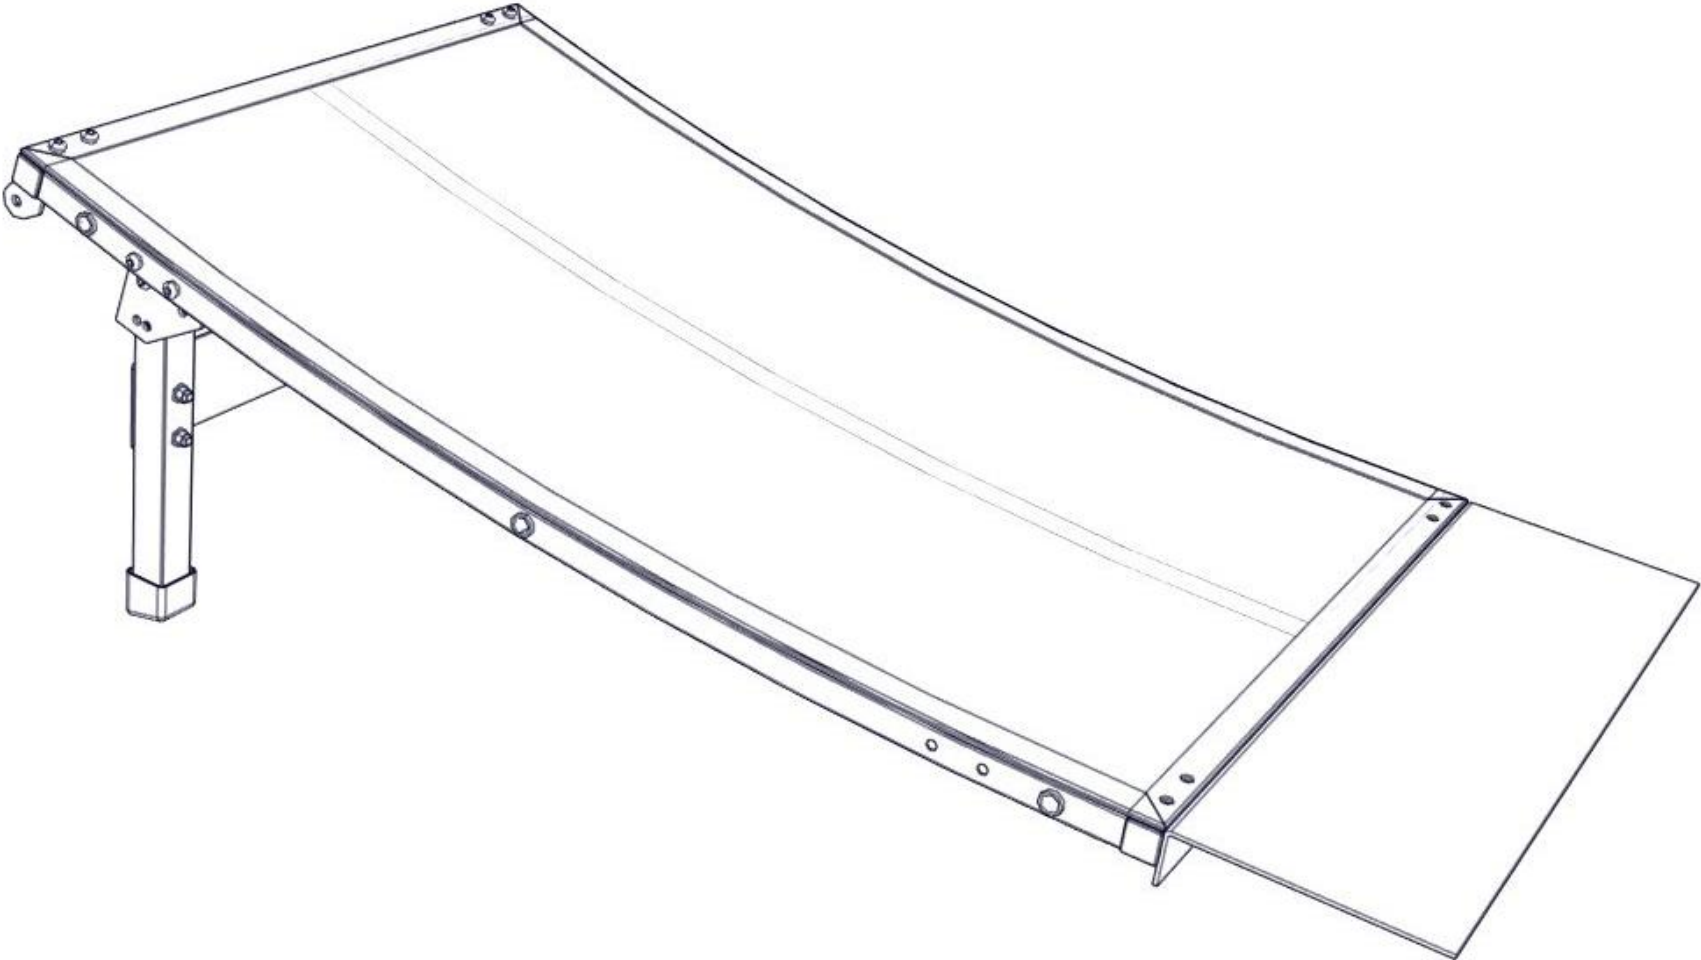

# TOE PIECE

## STEP 1

Place the toe piece on one of the ends of the ramp aligning the holes in the toe piece with the holes on the ramp

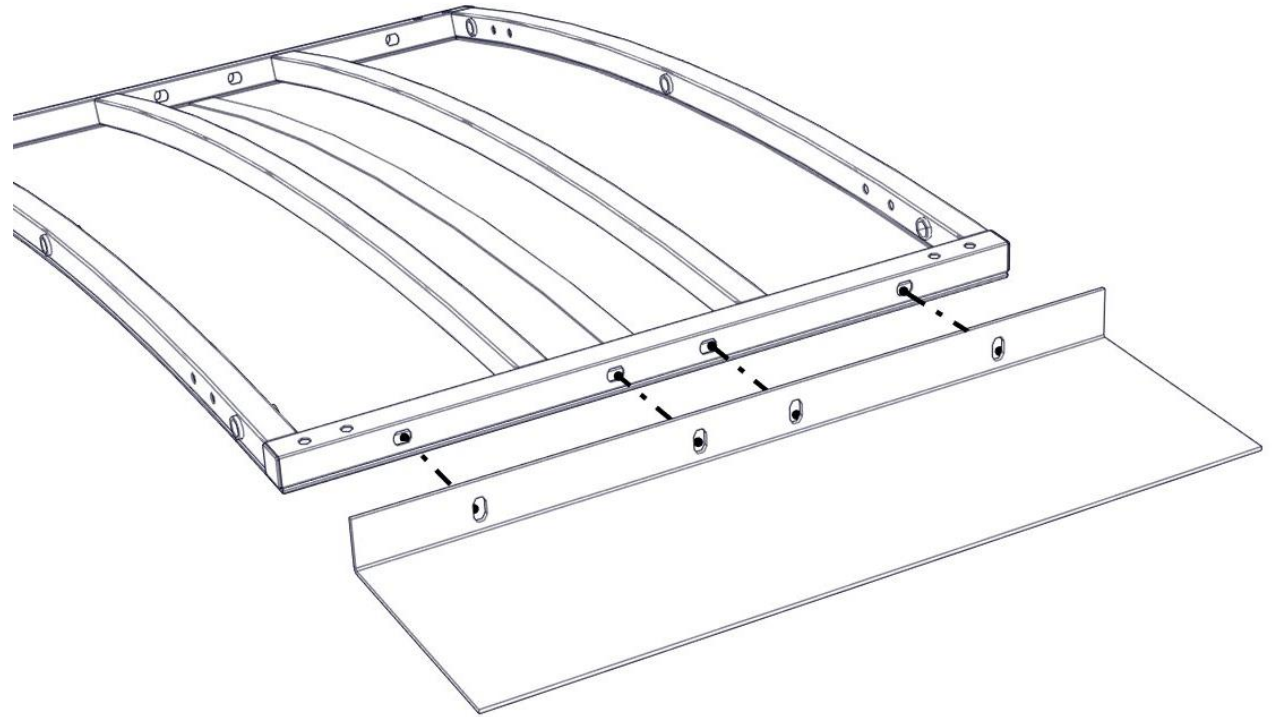


# BOLTING

## STEP 2

Place the bolts through the toe piece  
and the ramp


Then place a washer and then a nut and  
tighten them

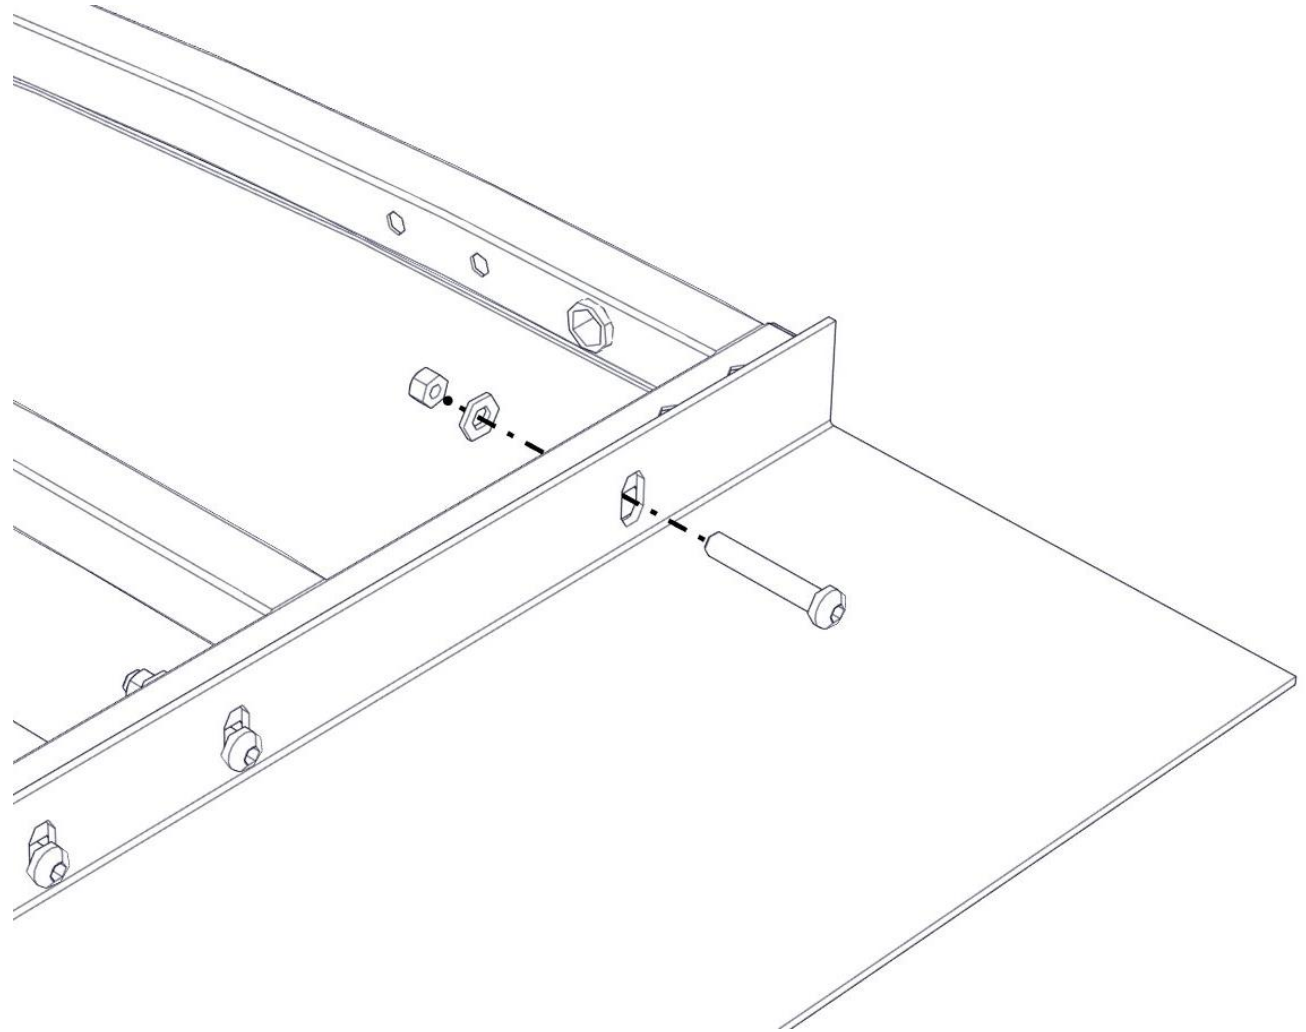

# LEG PLATES

## STEP 3

Align the leg plates on the sides of the ramp with the holes at the ends of the ramp as shown

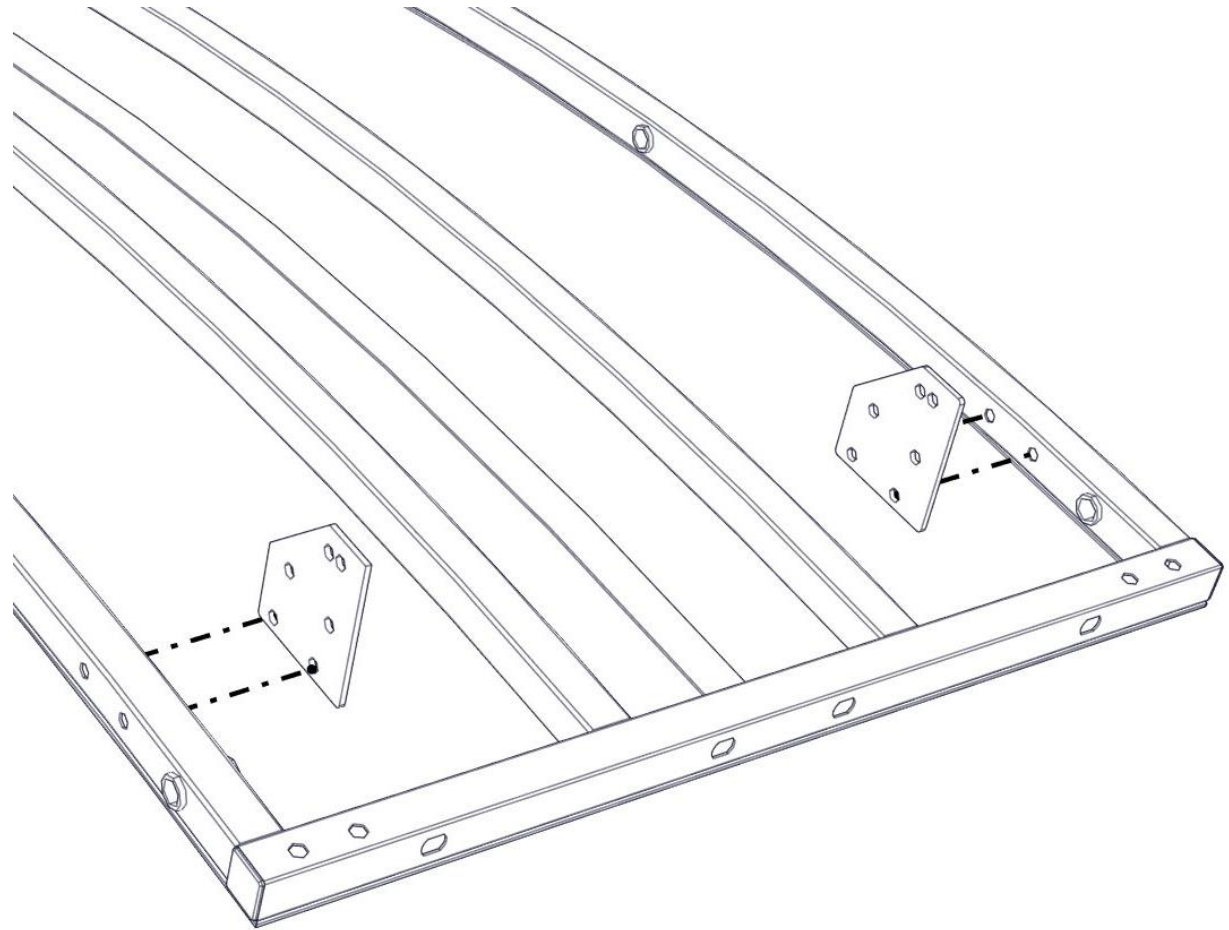


# LEG PLATES

## STEP 4

Secure the leg plates to the ramp by placing a bolt through the ramp and then the leg plate

Follow it by a washer and then a lock nut

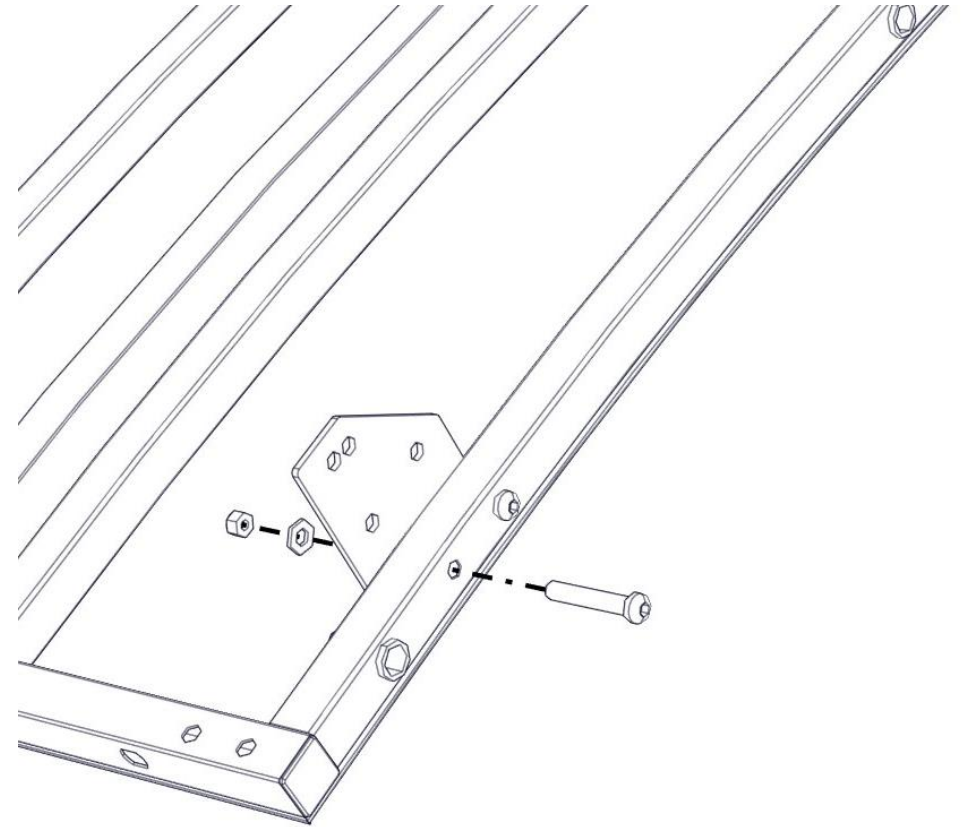


# BOLTING LEGS

## STEP 5

Secure the legs to the ramp by placing a bolt through the ramp and then the leg

Follow it by a washer and then a lock nut

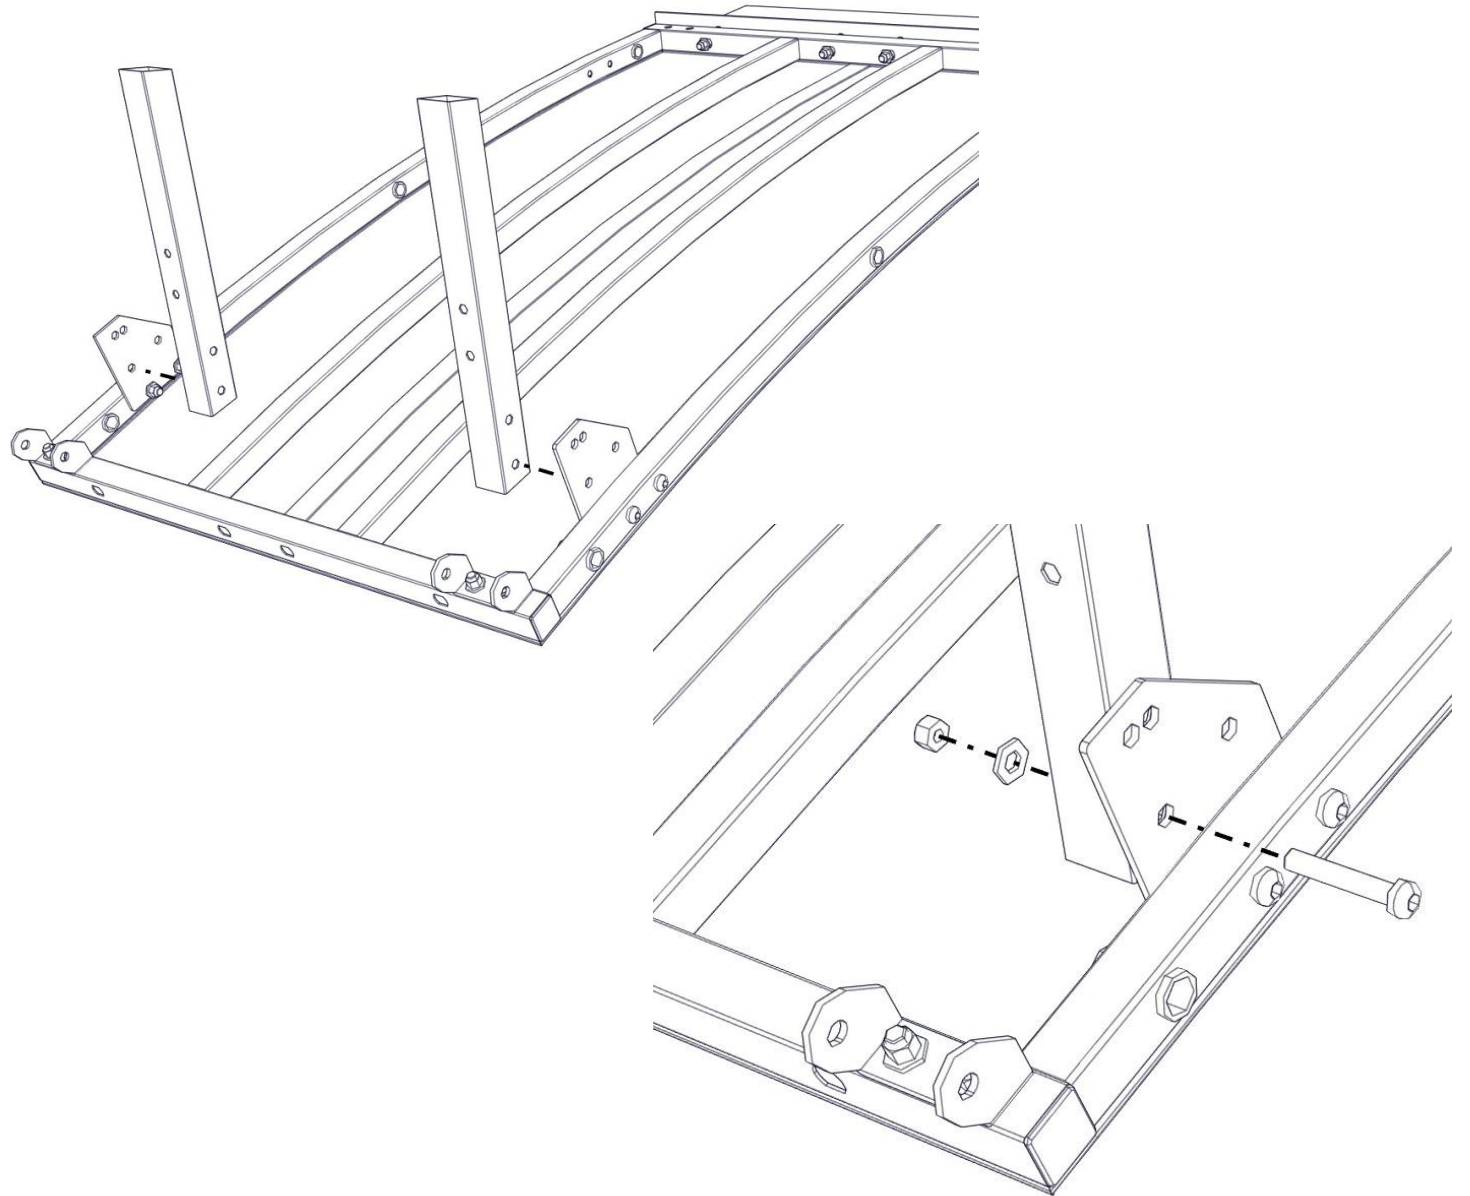



# BOLTING LEGS

## STEP 6

To make the legs stronger use the leg support bracket and bolt it using the holes in the legs as shown

Secure the legs to the plate by placing a bolt through the ramp and then the leg

Follow it by a washer and then a lock nut

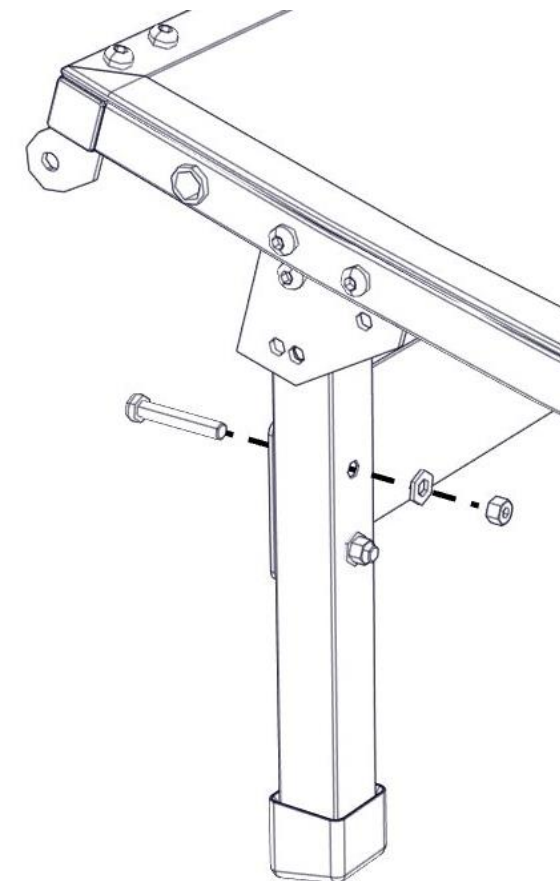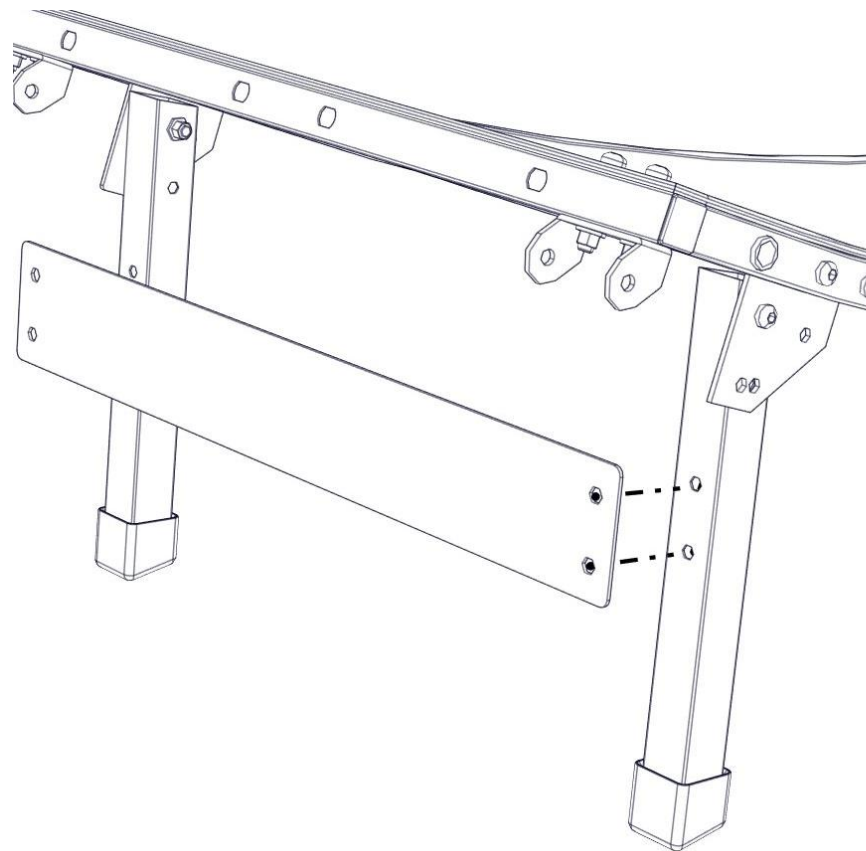


# BOLTING LEGS

## STEP 7


Secure the leg in the desired setting on the plate by placing a bolt through the plate and then the leg

Follow it by a washer and then a lock nut

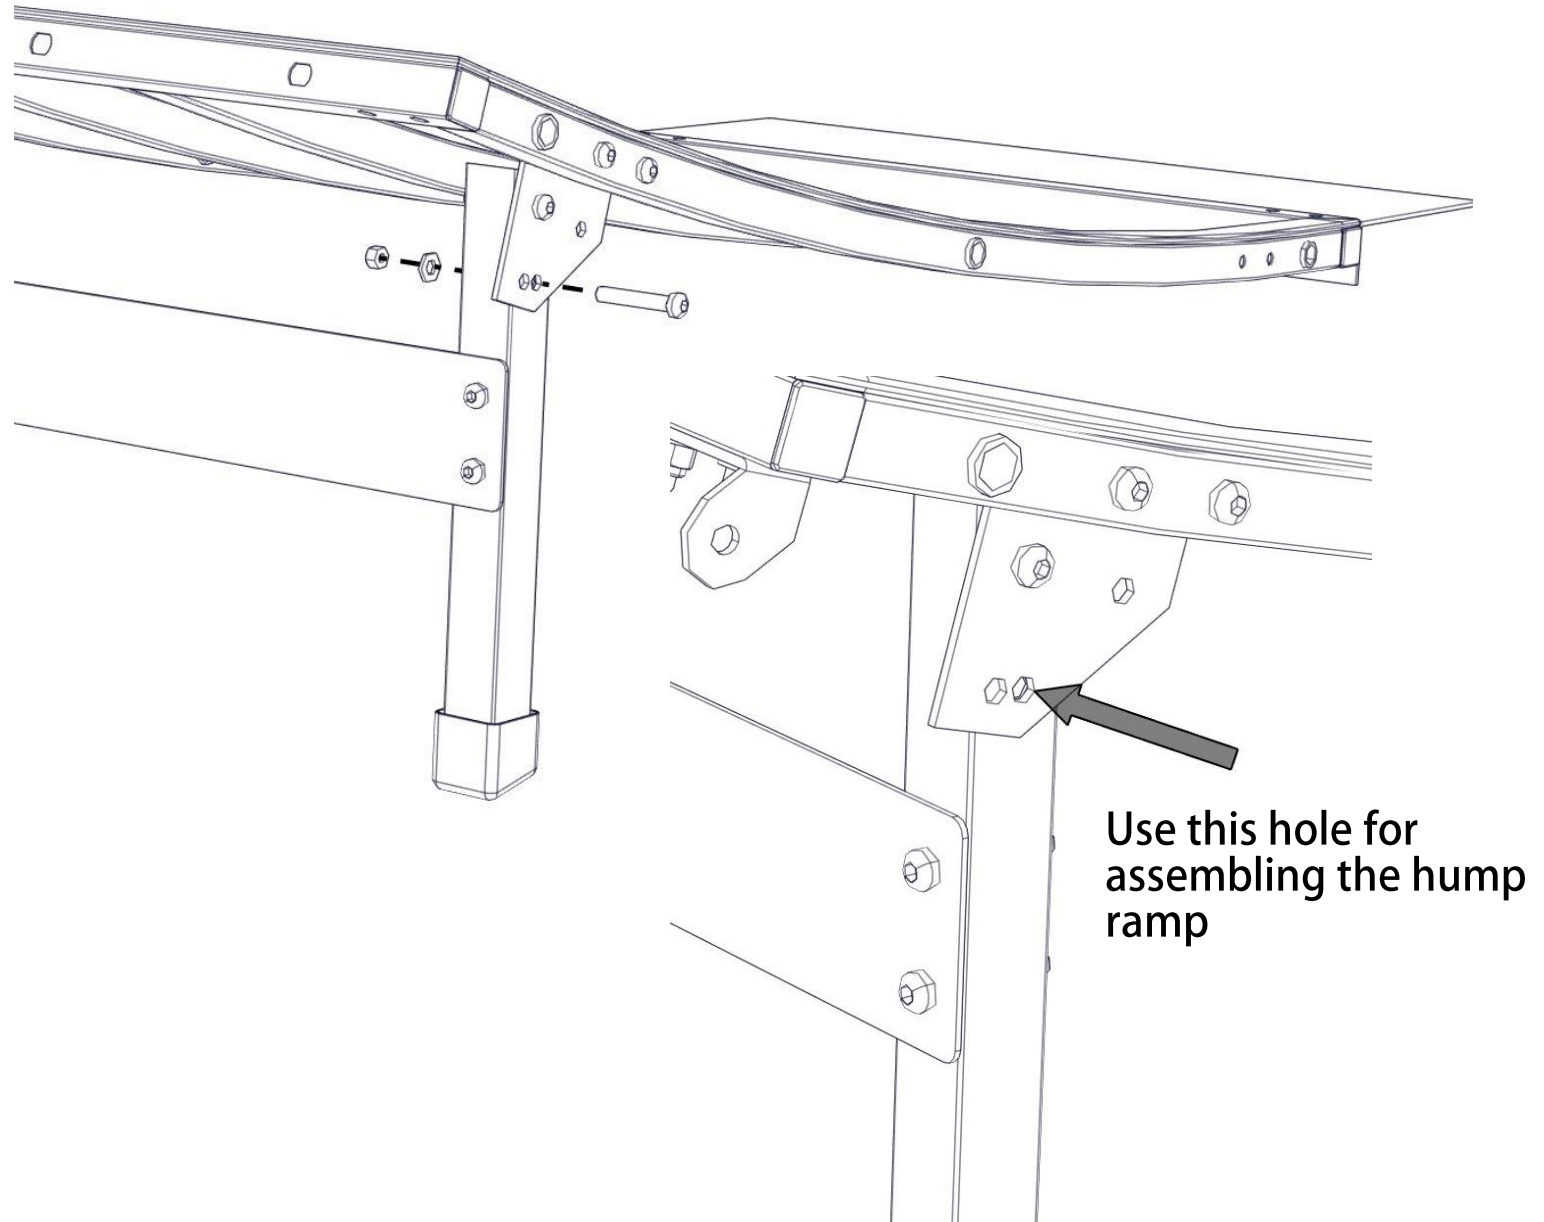



# BMX ROLLER INSTRUCTIONS

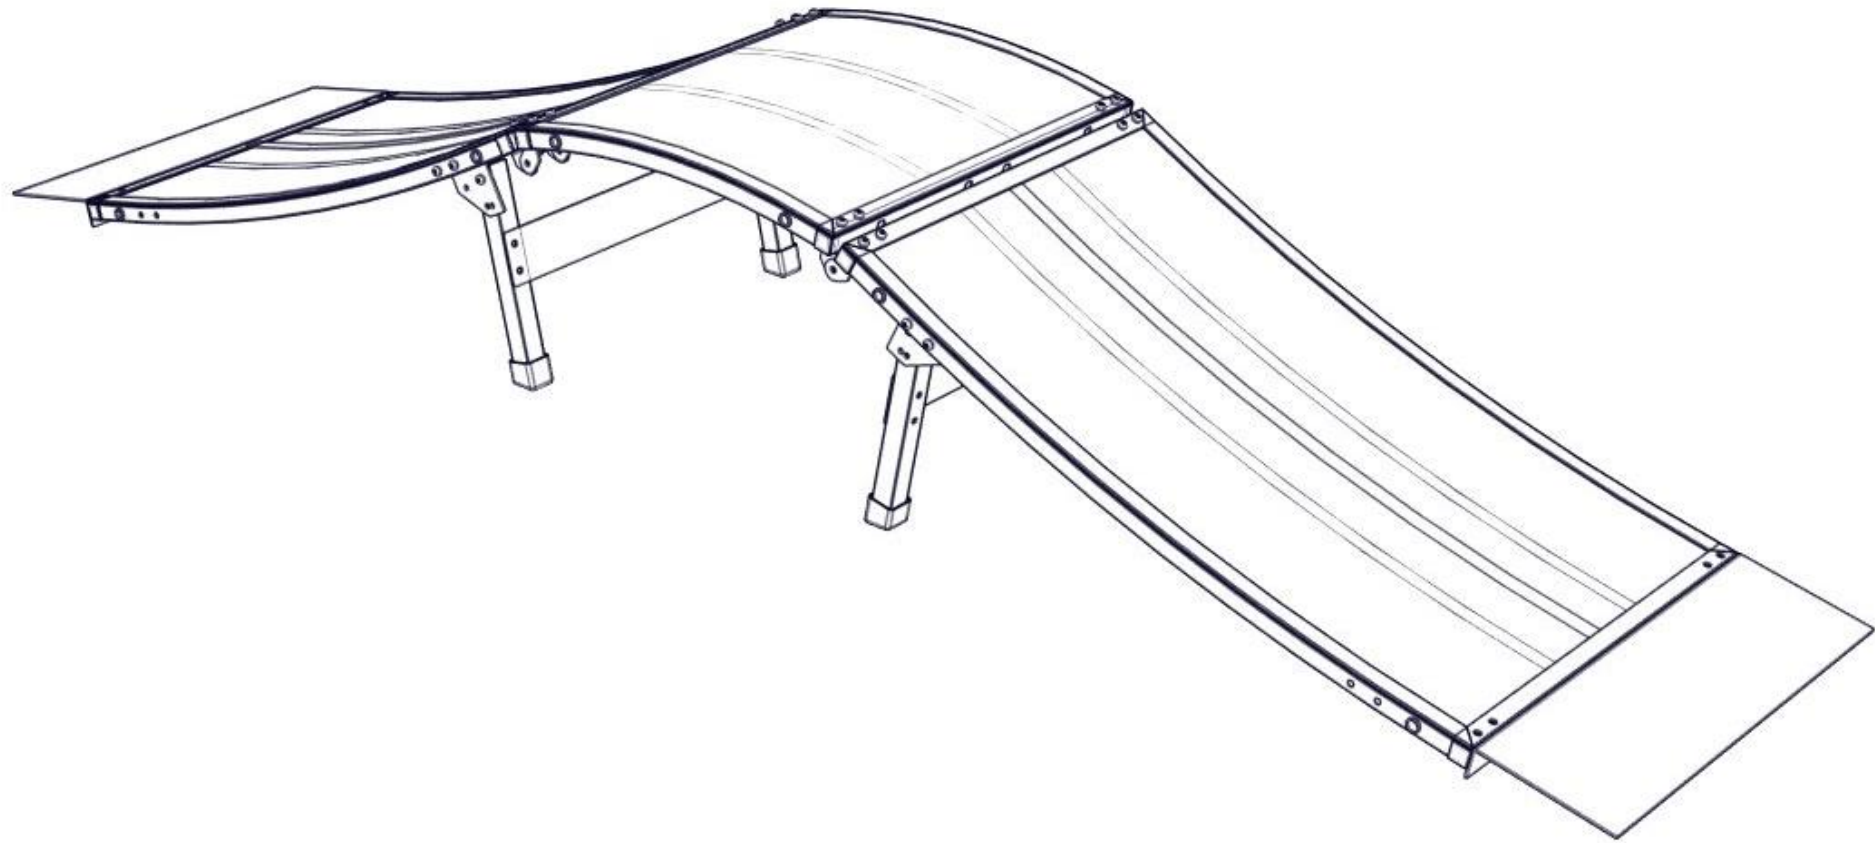


# HINGES

## STEP 1

Place the hinges on the ends of the ramp and hump where the 2 holes are


Align the holes in the hinge with the tabs facing outward as shown

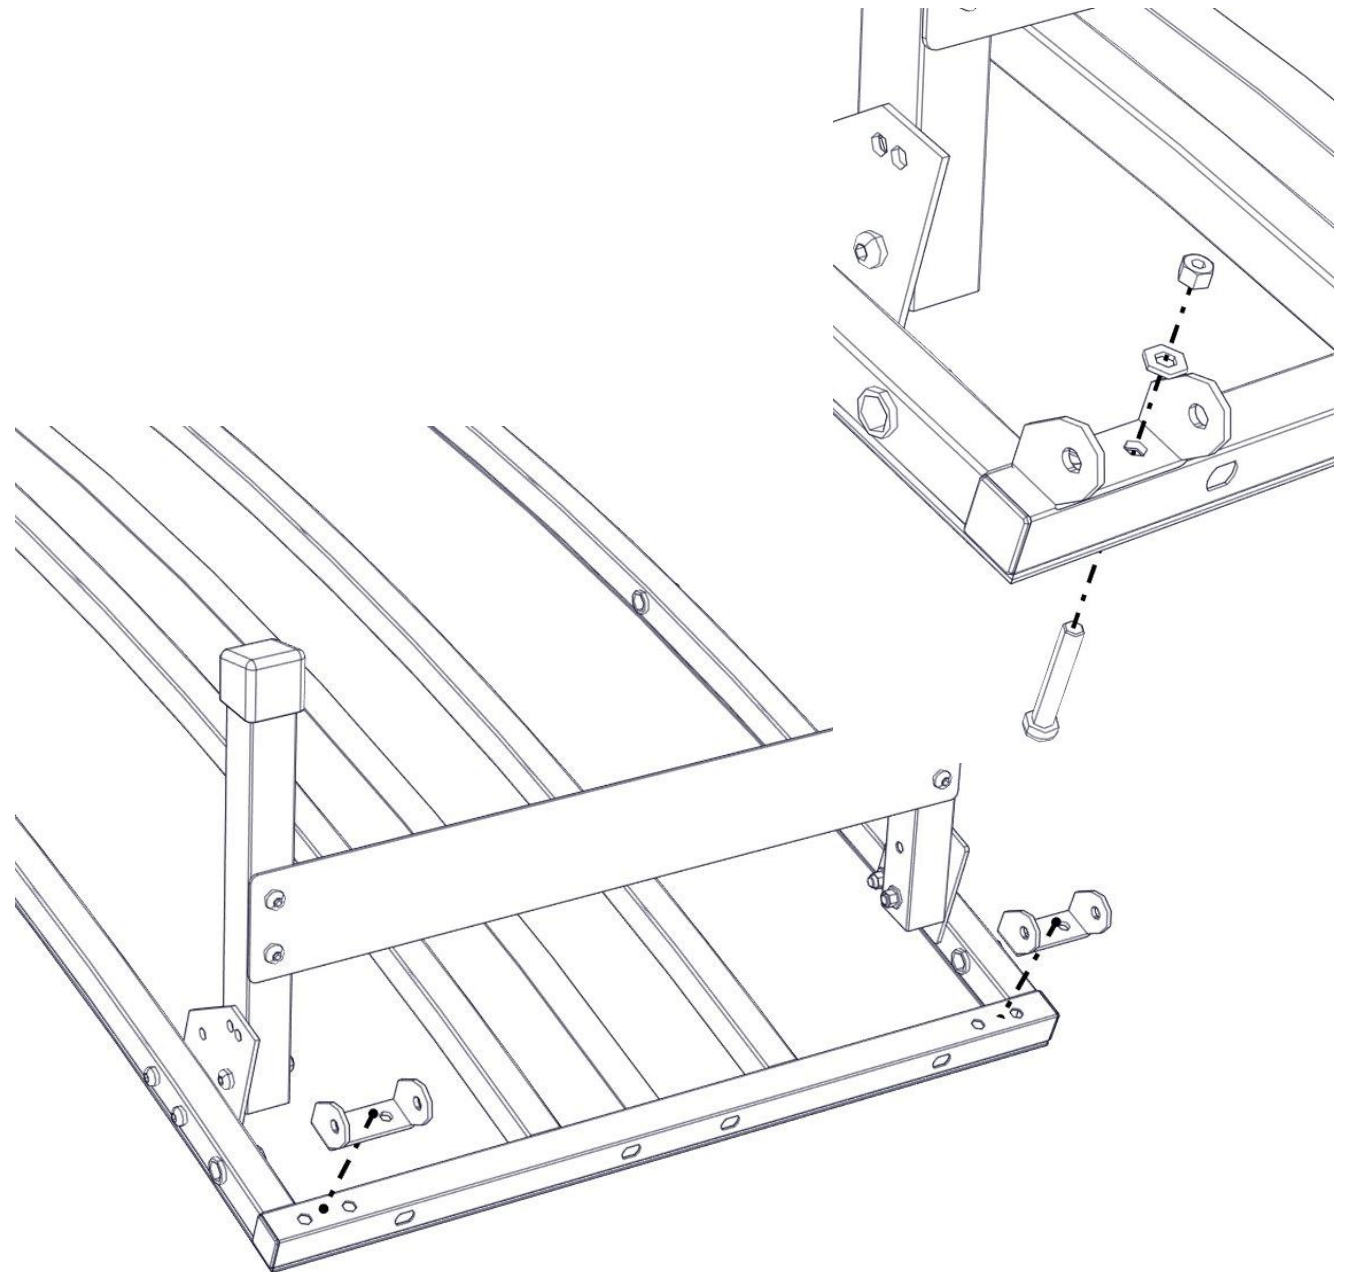

# HINGES

## STEP 2

Connect the hump ramp with the ramps  
by the hinges

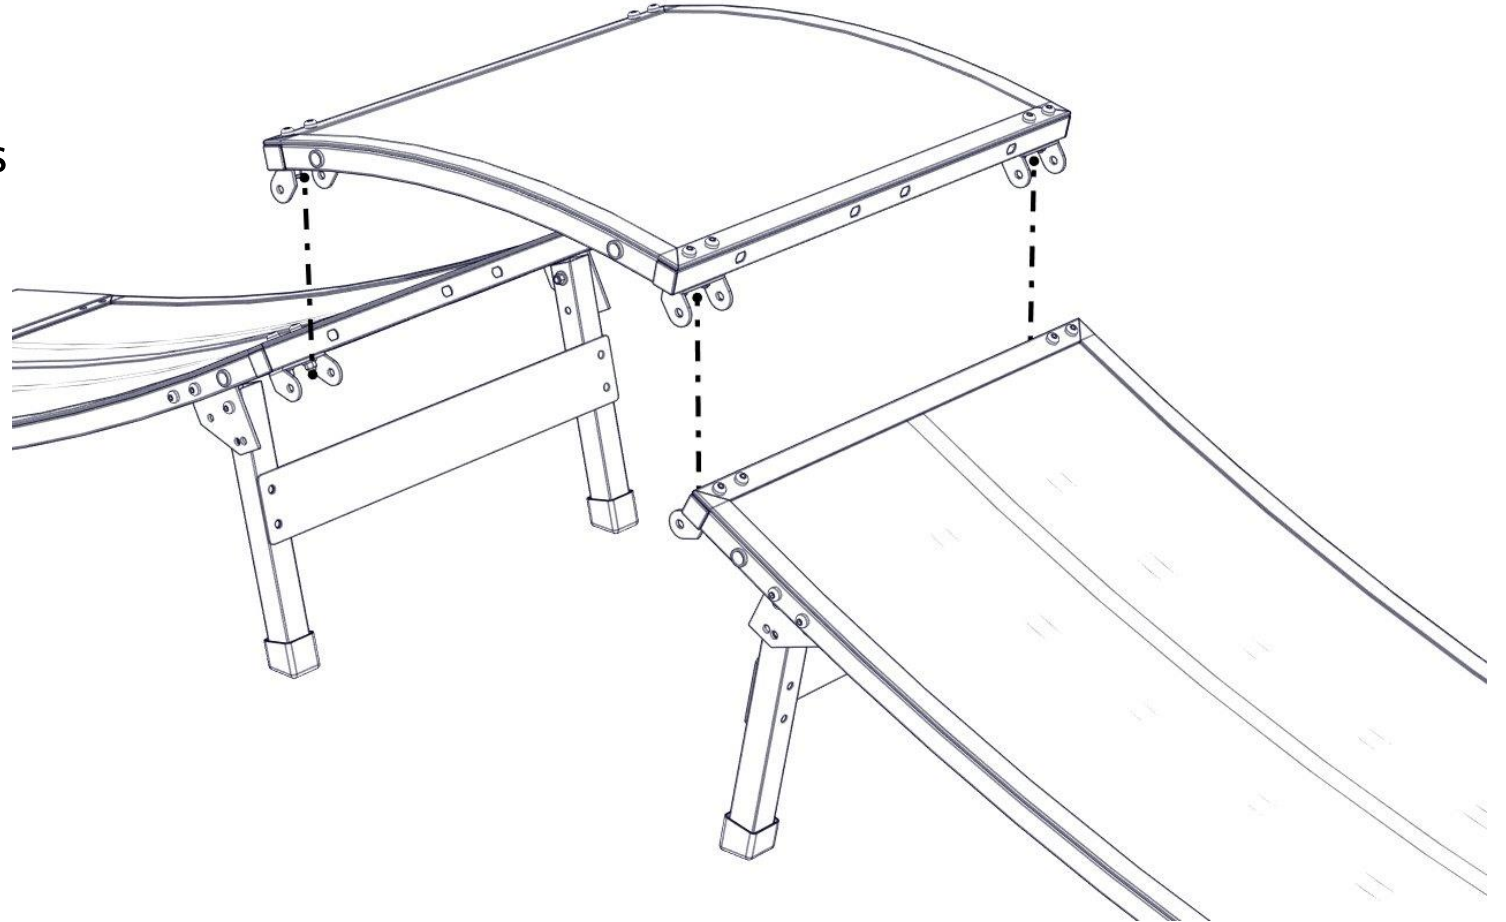

# HINGES

## STEP 3

Connect the hump ramp by placing a long bolt through the hinges and following it with a washer and lock nut

