

Parts needed

2x Aharon Optimus TR mini projectors
2x Aharon H7 high beam splitter cables
2x 53mm rubber caps
2x Custom made brackets + mounting hardware

Instructions

STEP 1 Opening up the headlight


Open-up the headlight, remove the reflector and take it out.
After this, remove the old projector by unscrewing the 3 locknuts on-top of the mounting points.



Make sure to keep the locknuts you need them in a later stage.



STEP 2 Installing threaded spacer

In order to mount the new projector and bracket you need to install the threaded spacer on-top of the bottom mounting point.

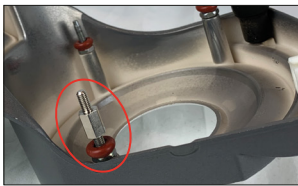

STEP 3 Mounting the bracket

See the picture below for the correct way to mount the bracket

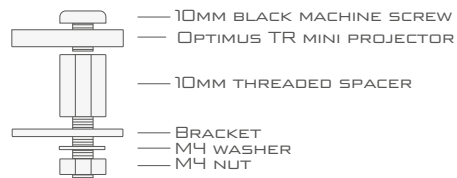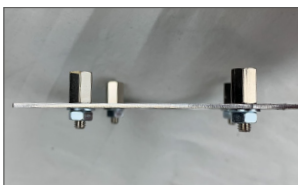

STEP 4 Mounting the projector

Mount the projector + bracket on-top of the mounting points and use the locknuts (from step 1) to secure the bracket.



Need help?



For more info about opening the headlight and how to remove the OEM projector please scan the QR-code.

Please note; we don't have a video for this specific headlight but the general procedure is the same.