

# INSTALLATION INSTRUCTIONS

## AUDI A6 C5 - pre facelift



### Parts needed

2x Aharon TL-r projectors  
2x Aharon H7 high beam splitter cables  
2x Custom made brackets + mounting hardware

### Tools needed

7mm socket  
PZ / PH screwdriver / bit  
Coffee and a little bit of patience

### Instructions

#### STEP 1 Disassemble the OEM projector



Disassemble the OEM projector and take it out of the headlight. For more info about how to disassemble/remove the projectors, please scan the QR at the bottom of this manual.



Make sure to keep the locknuts. You need them in a later stage.

#### STEP 2 Mount the hardware

In order to mount the new projector and bracket you need to mount the included hardware as followed.

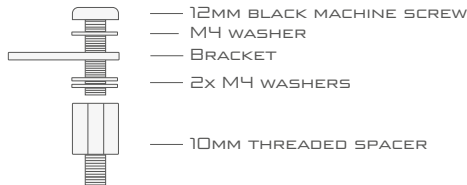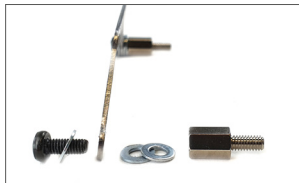

#### STEP 3 Mounting the projector

Mount the bracket onto the threaded mounting points, positioned at the bottom of the headlight. Use the M4 lock nuts, that were used to mount the OEM projector, to secure the bracket.

Before you mount the projector make sure to connect the solenoid cable to the connector on the bottom of the projector.


Mount the projector onto the threaded mounting points and use the M4 locking nuts to secure the projector (solenoid motor must be positioned to the bottom of the headlight) Note that it can be a bit hard to reach the threaded mounting points when the projector is in place..



### STEP 4 Disassemble the OEM projector

Connect the supplied H7 splitter like shown on the picture:

1. connect to h7 halogen high beam bulb
2. connect to h7 high beam feed from headlight
3. connect to solenoid cable of projector

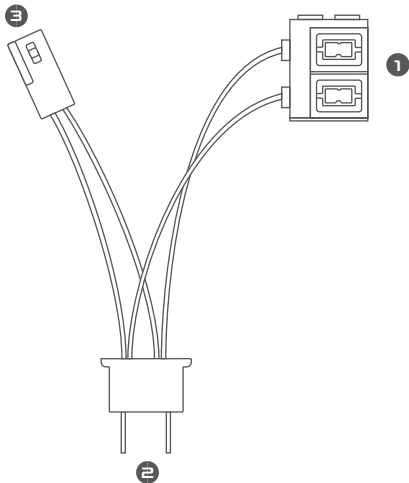

### STEP 5 Disassemble the OEM projector

Insert the D2S bulb, using the supplied bulb holder, and connect the D2S igniter to the bulb. Close the lid and you're done :)

### Need help?



For more info about opening the headlight and how to remove the OEM projector please scan the QR-code.