


## D1S / AMP ADAPTER

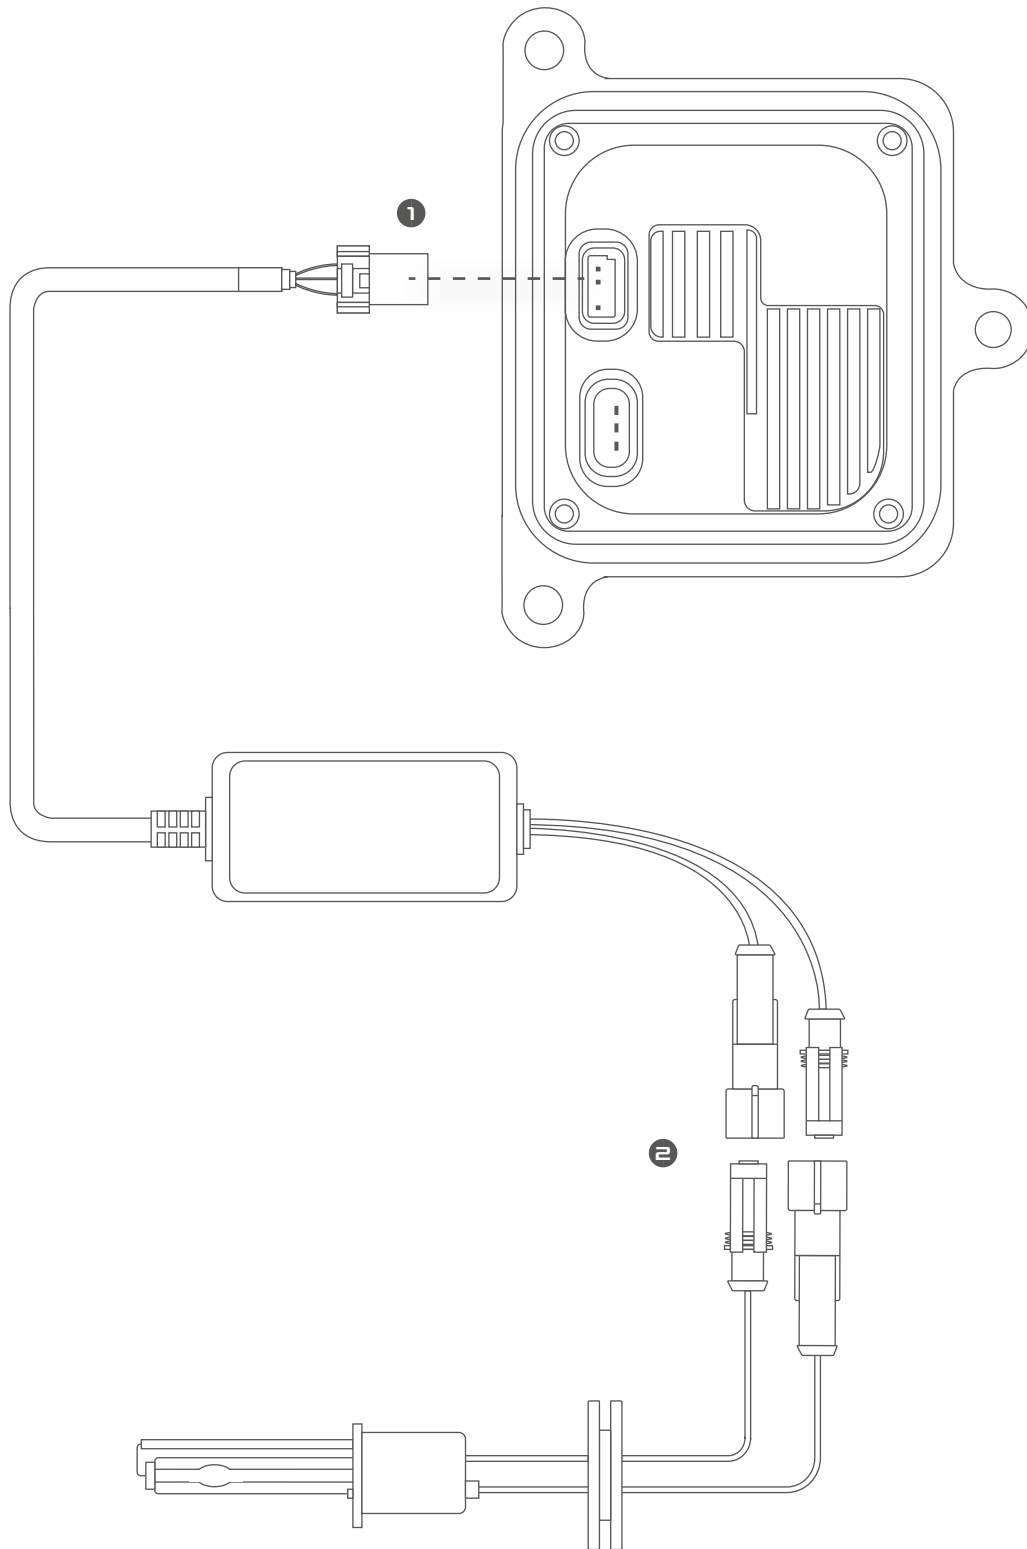

1. CONNECT TO THE OUTPUT OF THE OEM BALLAST

2. CONNECT TO AMP CONNECTORS OF THE H1 HID BULB