




Assembly Instructions






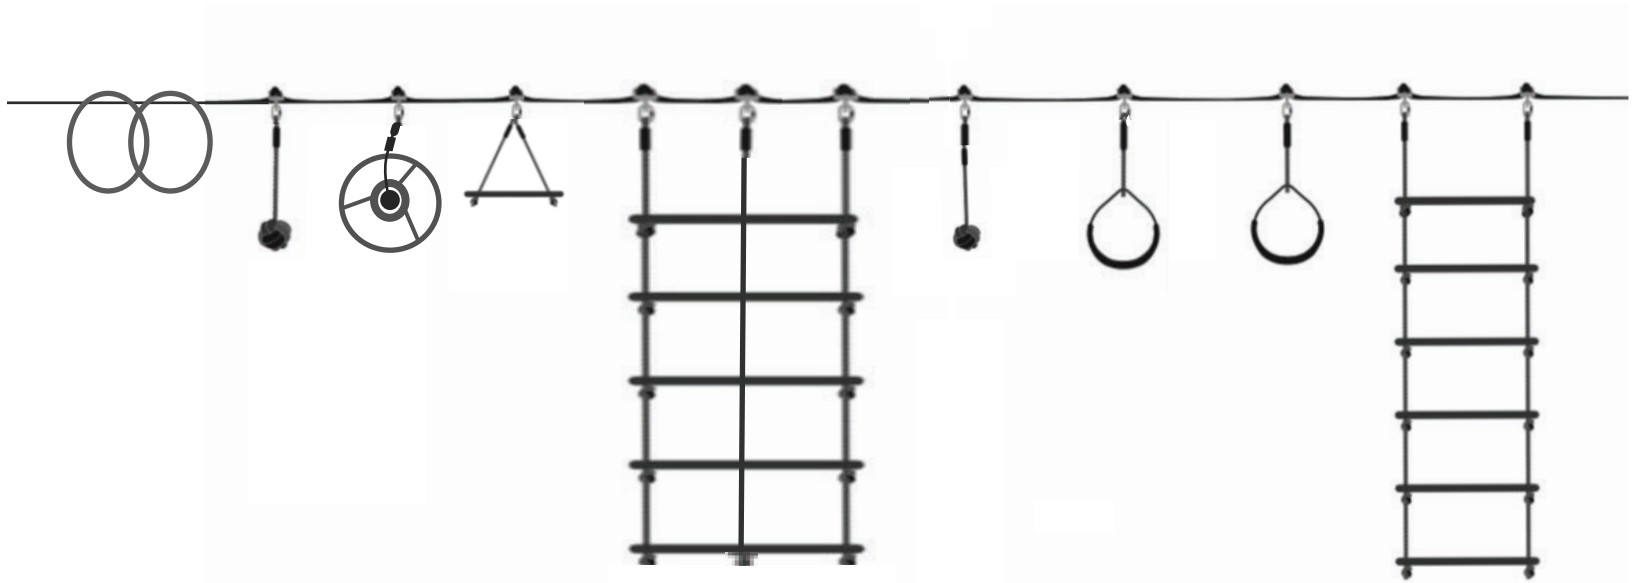








Ninja Obstacle Course For Kids



SAFETY INSTRUCTIONS:

- For ages 5 and up.
- Adult supervision required.
- Weight limit 250 lbs.
- Adult assembly required, including site selection and installation.
- Choose trees of at least 1 foot in diameter. Trees should be between 15-40 feet apart.
- Do not attach to unhealthy trees, this may result in injury.
- Load stress test must be performed before use.
- All watchers should maintain a 10 foot distance to prevent injury
- Inspect the strap before each use. Do not use it if there is any abrasion, cuts, tears, burns, sew pattern damaged or alterations. If the strap is showing signs of wear - do not use.


Parts List

SL	Quantity	Unit name	Picture
#1	1	Slackline	
#2	1	Ratchet	
#3	2	Freestyle Rings	
#4	2	Gymnastic Rings	
#5	2	Monkey Fists	
#6	1	Ninja Wheel	
#7	2	Tree Protector	
#8	1	Monkey Bar	
#9	1	Carry Bag	
#10	11 (+3 Spare)	Carabiners	
#11	11 (+3 Spare)	Buckles	
#12	1	Climbing ladder	
#13	1	Climbing Net	
#14	1	Tape Measure	


Trees Distance before install

- 50ft line \neq 50ft trees distance


max.distance - 42ft
tree diameter 7- 12in

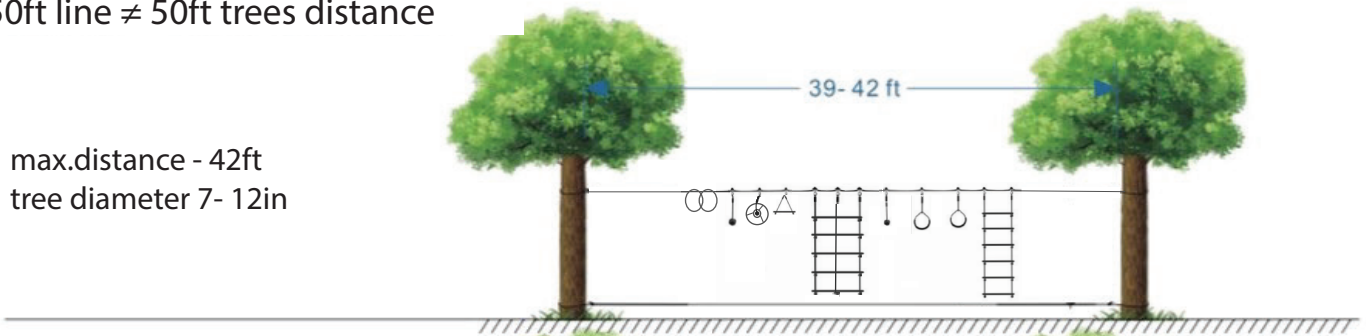

max.distance - 37ft
tree diameter 15 - 19in

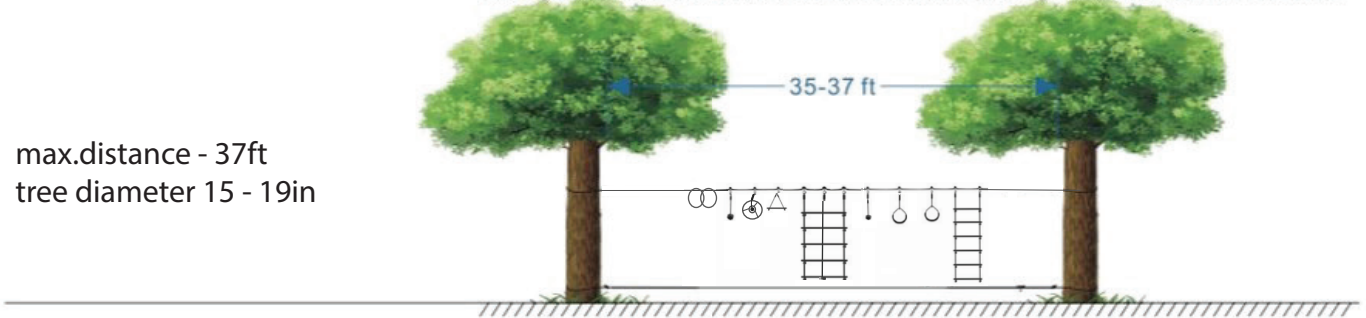

max.distance - 20ft
tree diameter 7 - 25in

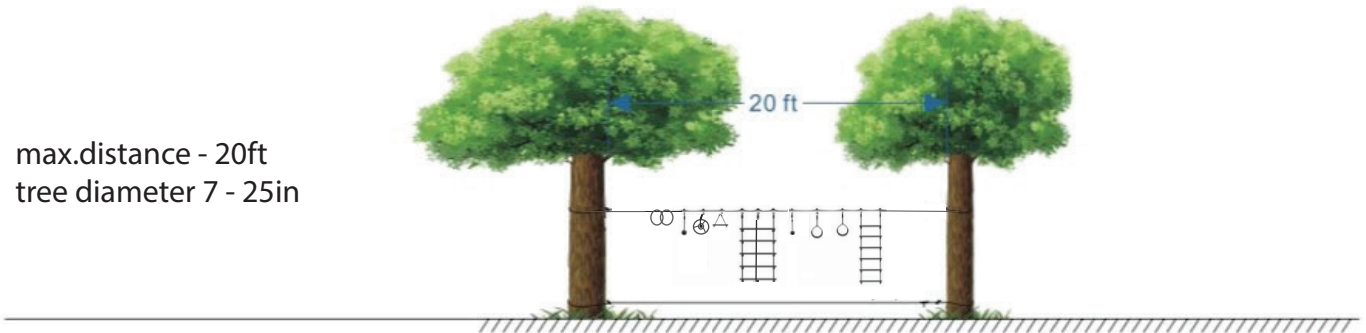



Assembly Instructions

1

Attach the strap to triangle clip, then move the triangle clip to the other end of the strap where there is a black mark.


Tips1. The distance of triangle clips can be adjusted depends on different environments and users.

Tips2. For safety reasons, we designed the triangle clip to be immovable, If you need to adjust its position, please pull the strap up from the buckle, as shown below, and then move it.)

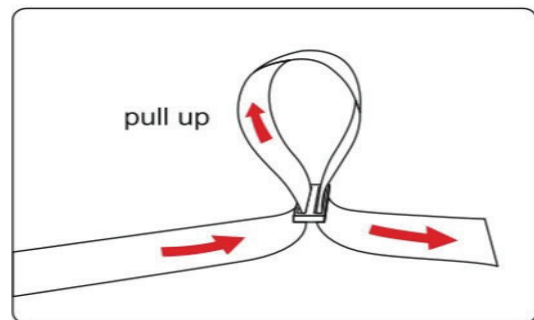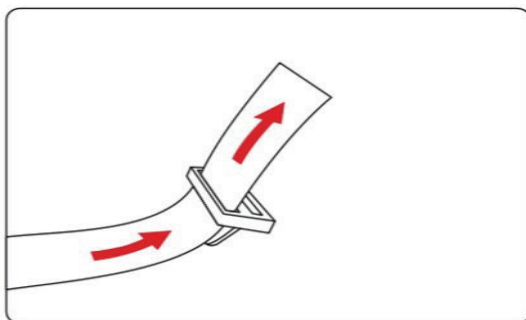


2

Use the same method to install the other carabiners. It is recommended that the distance between each tringle clip is 12in. You only need to attach 11 carabiners. There are 3 spare carabiners reserved in case you purchase extra. You can use the ruller for measurement.

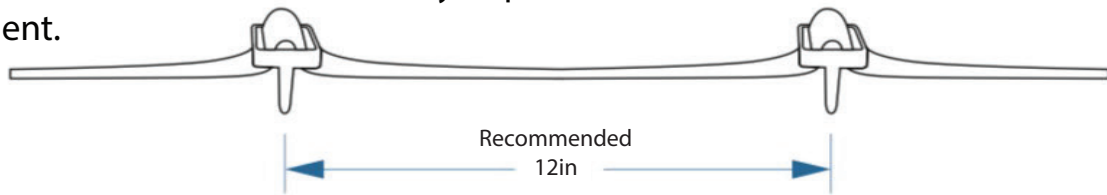


3

Wrap the cushion around the tree, fasten it. then set the Ninjaline height to around 12" above the users highest reach.

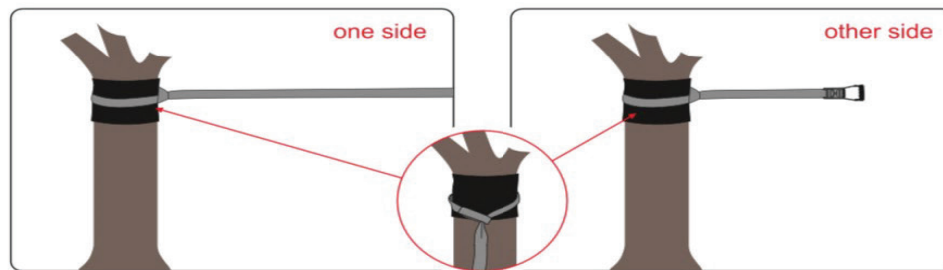



4

Insert the Freestyle Rings through the slackline

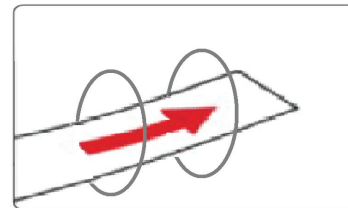


5

Pull the line tight through the slotted spool. The ratchet spool can only hold about 2 feet of line, so it's necessary to **pull the line as tight as possible before using the ratchet**. Do not overfill the ratchet spool or it can become jammed and unable to unwind.

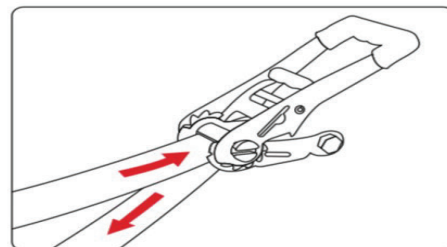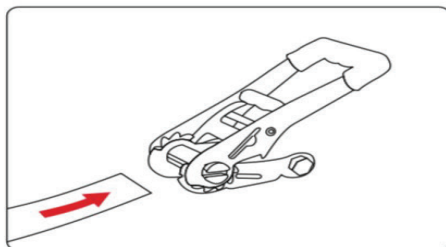


6

Pull the ratchet handle up and down until the line is tight. Then close and lock the ratchet handle.

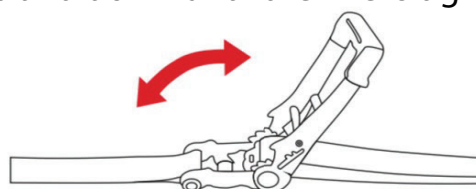




7

Ratchet teeth can damage the line. Keep the line and ratchet straight while cranking and do not over fill the ratchet with the line.

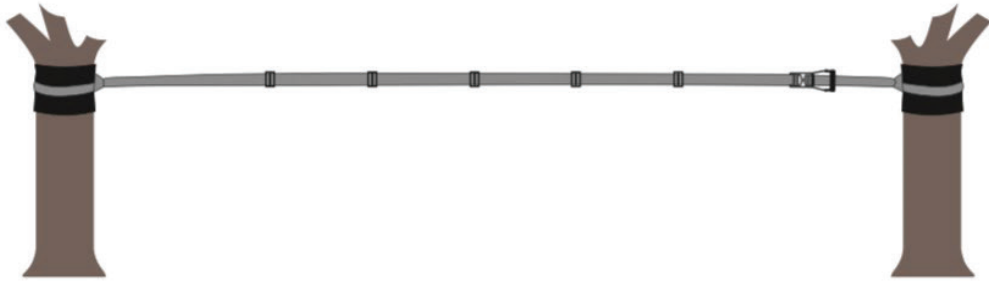


8

Hook the obstacles into the clip hole via carabiner, and secure the threaded locknuts. (Note: To connect the Monkey Bar, use two connectors into one carabiner, as shown in the figure.)

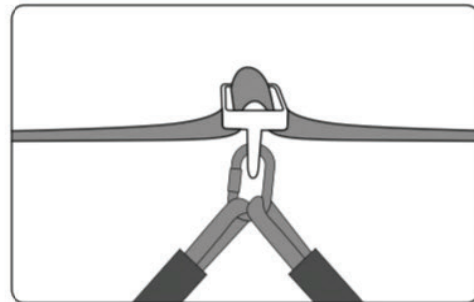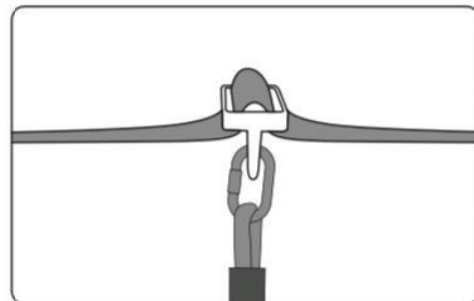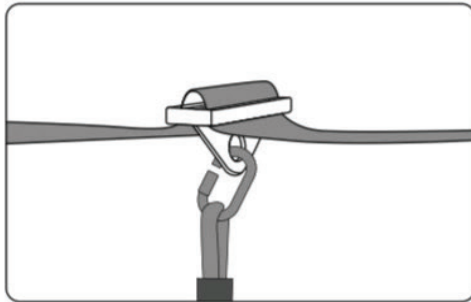

9

It is recommended to install the rope ladder on the left or right, and install the climbing net in the center. As shown in the picture

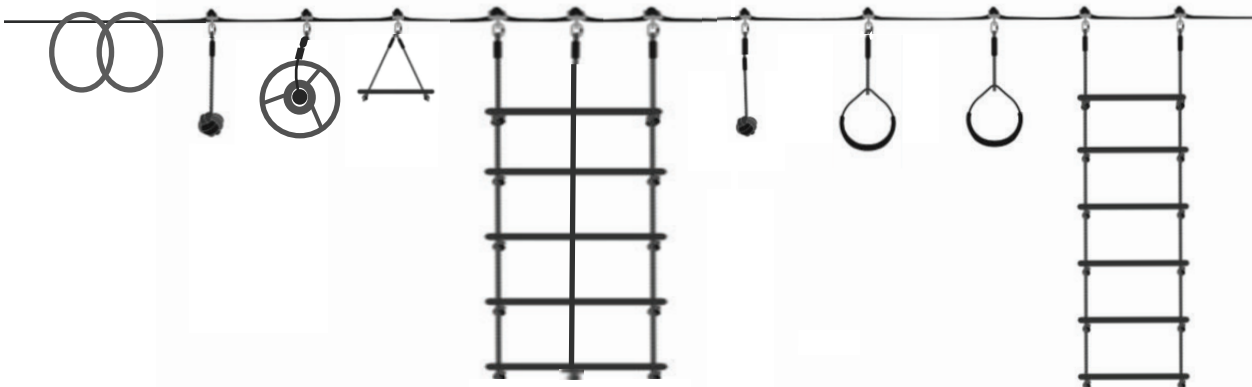

Mandatory load stress test

- Using either a 250 lb person or weight, test the line by suspending weight 5 feet from each end.
- Make sure all connections are tight and secure.
- Bystanders should maintain a safe distance from the line, at least 10 feet at all times.
- Watch for line dipping, or slipping around anchor trees. Tighten line if necessary

WARNING!

Do not use the product if something in the installation did not work properly or you encounter a problem while performing the installation.


Improper installation can lead to injuries.

If something is not done correctly, contact us immediately through Amazon's messaging service

Release The Line


1

Unlock the ratchet by pulling out the release lever firmly.

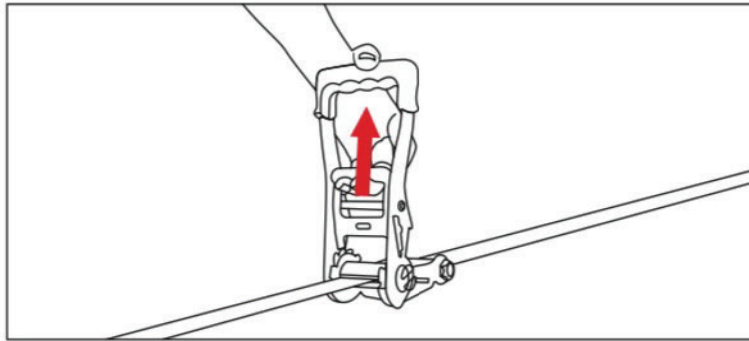

2

While holding the release lever in horizontal line, pull the ratchet all the way open until it is released, then pull the line out from the straightened end.

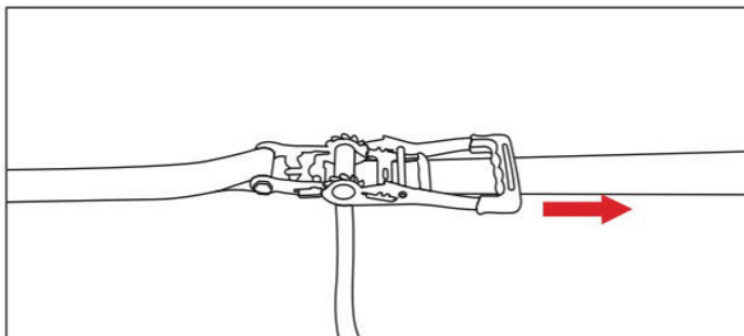

Contact us

If you have any questions, inquiries, suggestions or issues please contact us:

contact@ninjasafe.co

<http://NinjaSafe.co/pages/contact-us>

<http://facebook.com/NinjaSafe>