



manico telescopico con avvolgitubo statico
telescopic handle with static hose reel



serbatoio detergente alta pressione
high pressure detergent tank



porta accessori integrato
built-in accessory holders



battistrada in gomma
rubber wheels



tubo alta flessibilità 8m
super flexible hose 8m



interruttore rotativo a 3 posizioni
off/Eco Soft Cleaning/Fast Cleaning
3 positions rotative switch
off/Eco Soft Cleaning/Fast Cleaning



filtro ingresso acqua ispezionabile
inspectable water intake filter




Caratteristiche Generali

- Manico telescopico con avvolgitubo statico per tubo AP (8m)
- 2 Pompe a 3 pistoni assiali comandati dal piattello oscillante, testa in alluminio
- Pistoni in acciaio inox temperato
- Valvola di sicurezza automatica con azzeramento della pressione nella testa pompa
- Doppio motore universale con protezione termica
- Lunghezza cavo elettrico 5m
- Sistema twin nozzle con doppio ugello rotante

General Features

- Two-wheel trolley with handle and hose reel (8m HP hose)
- Two 3 Axial stainless steel pistons wobble-plate pumps
- Tempered stainless steel pistons
- Automatic by-pass valve with pump head pressure discharge
- Twin single-phase universal motor with thermal protector
- Electric cable length 5m
- Twin nozzle system with double rotary nozzle

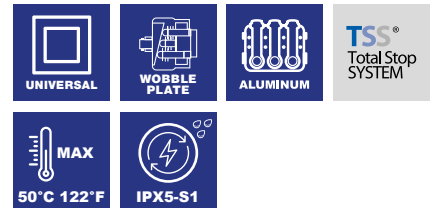

MOD	COD	MAX		MAX					KG NET
		bar	psi	l/h	gph	kW	Hz	V	kg
4.0	14792	150	2200	810	214	2,5	50-60	220-230~	14



TWIN NOZZLE

Accessori standard Standard accessories



46328

46332
(42 cm)

46337



46335
(8 m)

46329
(x2)

46330

46344