


All Squared Up Quilt (Q-037) by Camelot Design Studio

Difficulty Level: Beginner Finished Size: 43.5" x 51"



Exclusive Quilt Design by Camelot Design Studio
The direction of the fabrics in the digital imagery may not be accurate to the final product
© Disney/Pixar

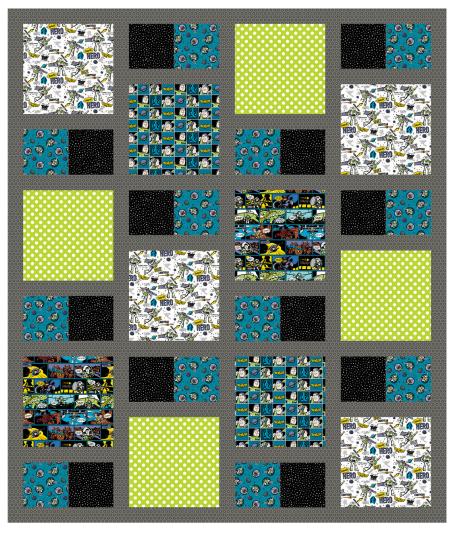

Suggested Backing 21005-0036 1-1/4 yards



COLLECTION III

Fabric requirements



Fabric A: 85410504 01 1/3 yard



Fabric B: 85410505 02 1/3 yard



Fabric C: 85410504 01 1/3 yard



Fabric D: 85410501 01 1/3 yard



Fabric E: 21005-0036 1/3 yard



Fabric F: 2141-0002 1/3 yard



Fabric G: 85410503 01 1/3 yard



Fabric H (Binding) 2142-0085 1-1/4 yards



OTHER TOOLS & SUPPLIES

- -Needle and coordinating thread
- -Sewing machine
- -Iron & pressing surface
- -Rotary cutter and mat
- -Fabric shears
- -Straight pins

NOTES

- -For best results, read through all instructions before starting.
- -Please wash, dry & iron your fabrics before beginning, and trim selvedges.
- -Unless otherwise indicated, sew all seams with a 1/4" seam allowance.
- -Press your seams open as you go.
- -WOF = width of fabric

CUTTING

Fabrics A-B-C-D From each fabric, cut (1) 9-1/2" x WOF strip. Sub-cut: -(2) 9-1/2" x 9-1/2" squares.

Fabric E

Cut (1) 9-1/2" x WOF strip. Sub-cut: -(4) 9-1/2" x 9-1/2" squares.

Fabrics F & G

From each fabric, cut (2) 5" x WOF strips. Sub-cut: -(12) 5" x 5" squares.

Fabric H

Cut (6) 2-1/2" x WOF strips. Set aside for binding.
Cut (14) 2" x WOF strips. From (5) of the strips, sub-cut:
-(20) 9-1/2" x 2" rectangles. These will be referred to as the <u>short</u> sashing strips.

From the remaining strips:


-sew (2) together end-to-end. Trim to (1) 51-1/2" strip. Take the leftover strip and sew it end-to-end to another 2" strip. Trim again to 51-1/2". Continue in this manner to make (5) 51-1/2" x 2" strips. These will be referred to as the <u>long</u> sashing strips.

Sew any remaining strips together end-to-end and trim to make (2) 44" x 2" strips. These will be referred to as the top and bottom borders.




PIECING (NOTE: refer to the Assembly Layout on p.4 for fabric placement)

1. Sew (1) Fabric G square to the left hand side of (1) Fabric F square, as shown, making sure that the direction of the print is oriented correctly. Repeat to make (6) units. These units will be used to create columns 1 & 3.




2. Repeat Step 1 to make 6 more units, this time reversing the order of the fabrics. These units will be used to create columns 2 & 4.



Sewing the columns (NOTE: As you piece each column always pay attention to the direction of the print).

3. Sew the following pieces together from top to bottom as shown (NOTE: use the units created in Step 1, as well as the short sashing strips). This creates Column 1.

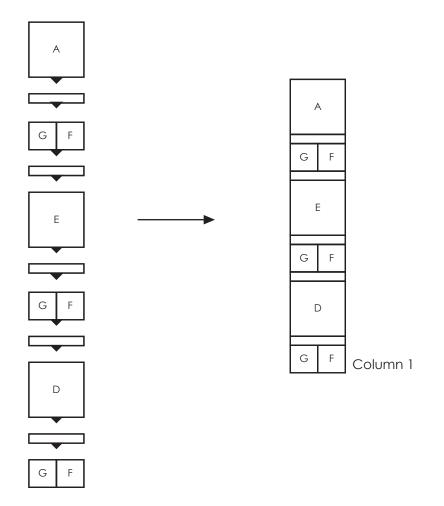


CAMELOT


4. Refer to the assembly layout on page4 & to the cover image to sew columns 2, 3 &4.

ASSEMBLY

5. Sew all columns together from left to right, while inserting a long sashing strip in between each column, as shown:

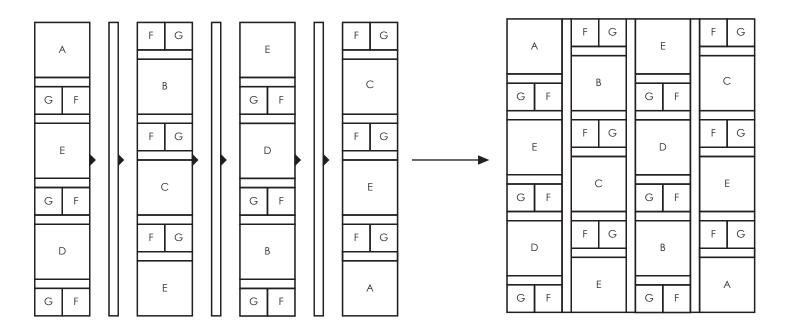

- 6. Sew a long sashing strip to either side of the unit created in Step 5.
- 7. Sew the top and bottom border pieces to the unit created in Step 6. This completes the quilt top.





FINISHING

- 8. Layer the quilt top with batting and backing. Baste and quilt as desired.
- 9. Sew the Fabric H binding strips together end-to-end and press seams open. Bind the quilt using your favorite method.

Assembly Layout

