


LED SPOTLIGHT CANLESS GIMBAL - 5 CCT SELECTABLE 2", 3", 4"

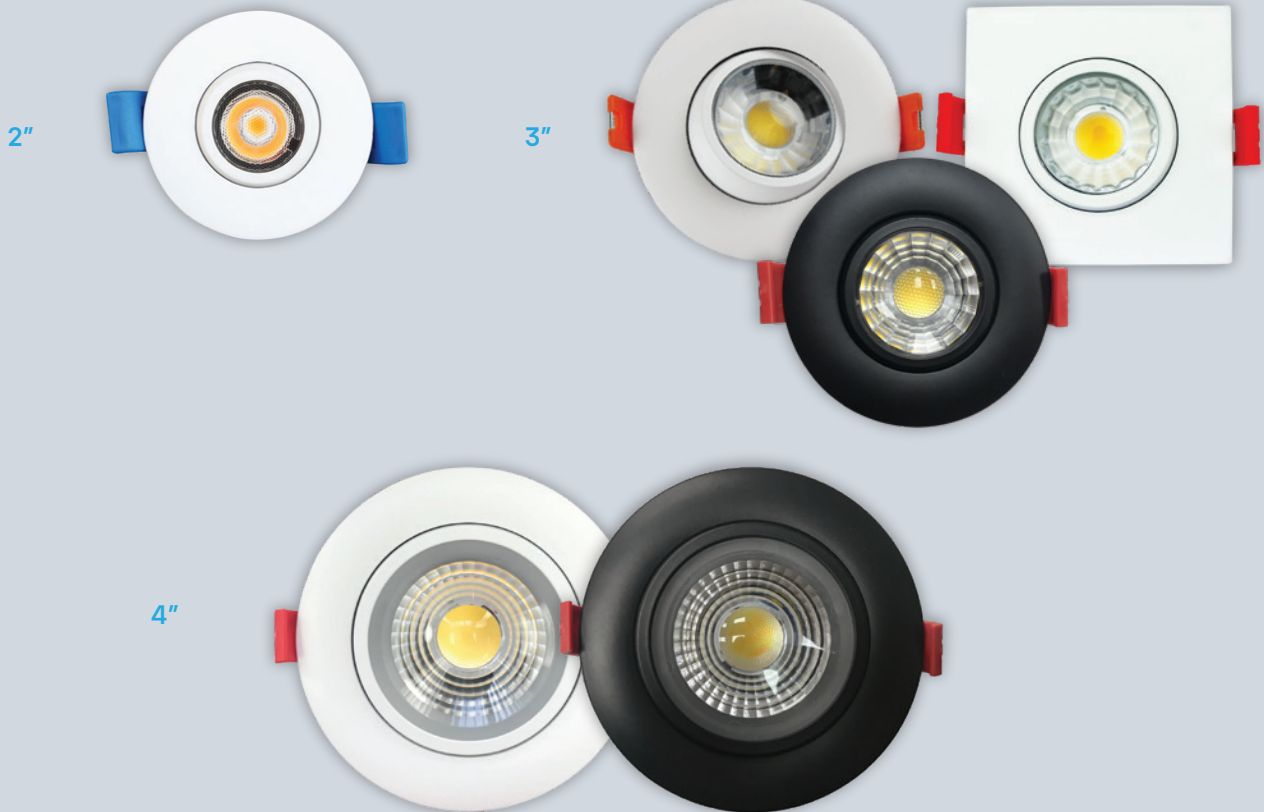

**CRI
80**

COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K




DIMMABLE

TRIAC


**IC
RATED**

**DAMP
LOCATION
RATED**


**3
YEAR
WARRANTY**

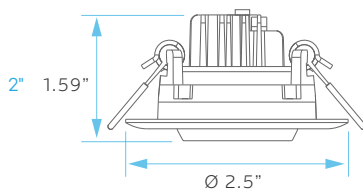

CUTOUT: 2"

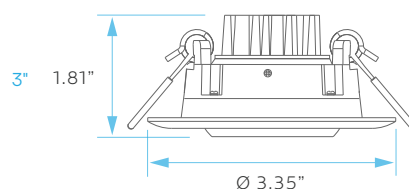

CUTOUT: 2.75"

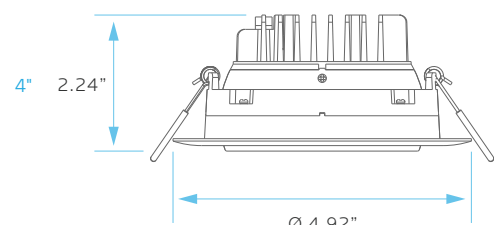

CUTOUT: 4.25"

ELECTRICAL

		MODEL	DESCRIPTION	POWER	INPUT VOLTS	LUMEN EFFICACY	LIFETIME	COST/YR
2"		LR23236	LED5W/DL2/GB/5CCT/FL	5	120V	80	50,000	\$ 0.60
	RD	LR23220	LED8W/DL3/GB/5CCT/RD	8	120V	75	50,000	\$ 0.96
3"		LR23221	LED8W/DL3/GB/5CCT/RD/BK	8	120V	75	50,000	\$ 0.96
	SQ	LR23222	LED8W/DL3/GB/5CCT/SQ	8	120V	75	50,000	\$ 0.96
4"	RD	LR23225	LED11W/DL4/GB/5CCT/RD	11	120V	91	50,000	\$ 1.32
		LR23226	LED11W/DL4/GB/5CCT/RD/BK	11	120V	91	50,000	\$ 1.32

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	FLOOD	ETL	ENERGY STAR	PLATE (KNOCKOUT)
LR23236	LED5W/DL2/GB/5CCT/FL	2700K/3000K/3500K/4000K/5000K	CCT SELECT	400	80	40°	YES	YES	LR41004 (#0)
LR23220	LED8W/DL3/GB/5CCT/RD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	600	80	40°	YES	YES	LR41004 (#1)
LR23221	LED8W/DL3/GB/5CCT/RD/BK	2700K/3000K/3500K/4000K/5000K	CCT SELECT	600	80	40°	YES		LR41004 (#1)
LR23222	LED8W/DL3/GB/5CCT/SQ	2700K/3000K/3500K/4000K/5000K	CCT SELECT	600	80	40°	YES		LR41004 (#1)
LR23225	LED11W/DL4/GB/5CCT/RD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	80	40°	YES	YES	LR41002 (#1)
LR23226	LED11W/DL4/GB/5CCT/RD/BK	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	80	40°	YES		LR41002 (#1)

COMPATIBLE
WITH:

LR35126
Emergency
LED Driver



LR41002
New Construction
Mounting Plate




KNOCKOUTS




KNOCKOUT SIZE

#0	Ø3.14" (Ø80 mm)
#1	Ø4.33" (Ø110 mm)
#2	Ø6.29" (Ø160 mm)

LR41004
New Construction
Mounting Plate



KNOCKOUTS



KNOCKOUT SIZE

#0	Ø2.125" (Ø54 mm)
#1	Ø2.83" (Ø72 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø5.19" (Ø132 mm)