


## LED SPOTLIGHT CANLESS GIMBAL - 5 CCT SELECTABLE 2", 3", 4"

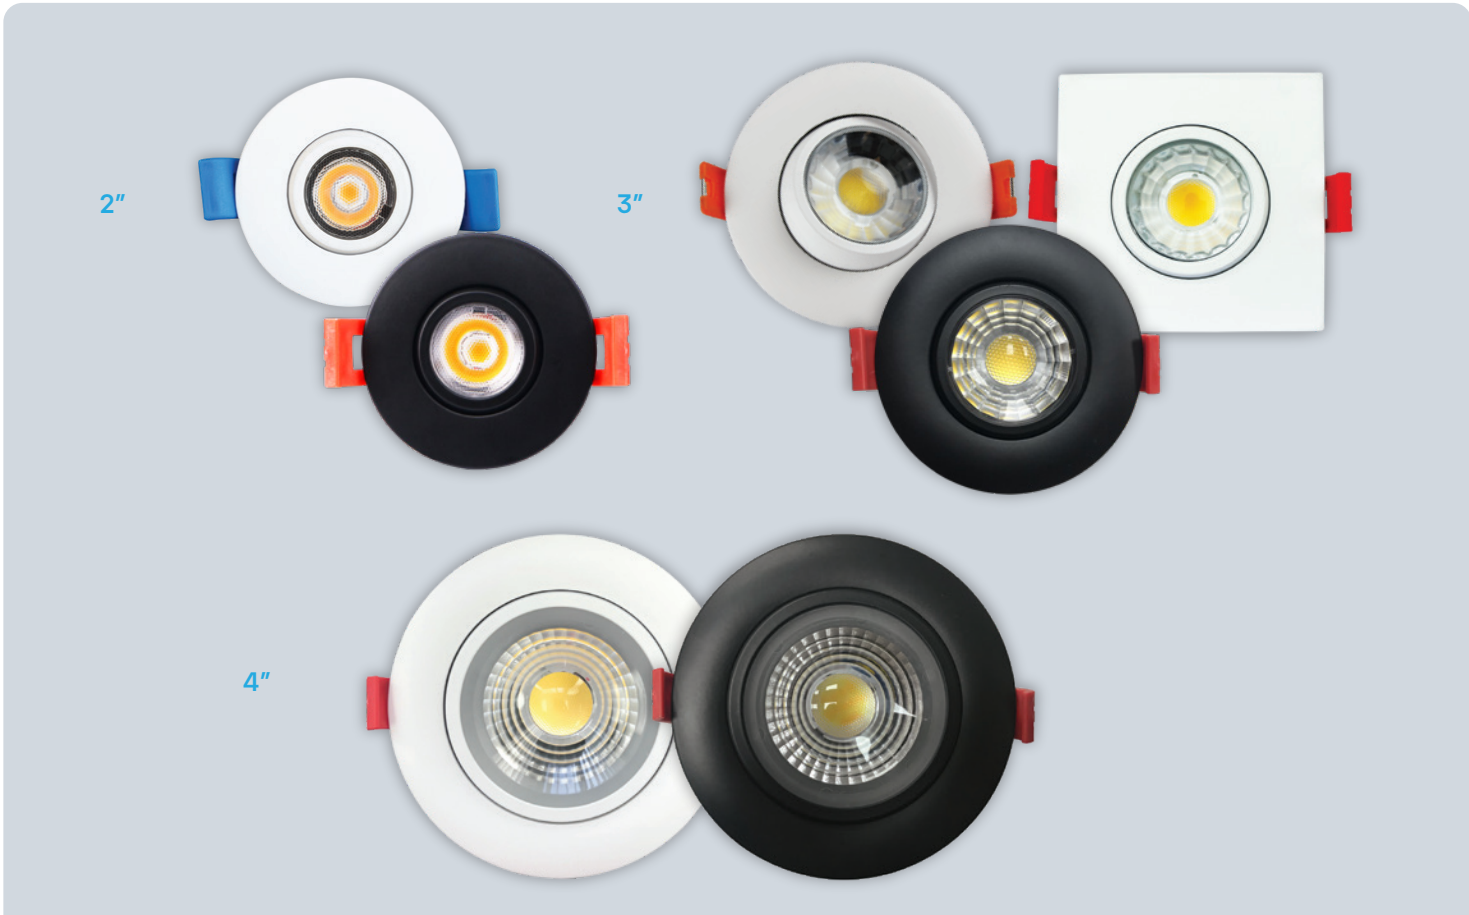

**CRI 80**

**CRI 90**

**COLOR SELECTABLE**  
2700K 3000K 3500K 4000K 5000K


30°  
360°  
GIMBAL

**DIMMABLE**  
TRIAC


**IC RATED**

**DAMP LOCATION RATED**


**3 YEAR WARRANTY**

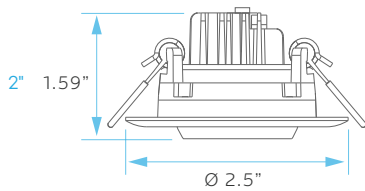

CUTOUT: 2"

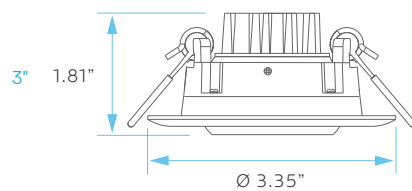

CUTOUT: 2.75"

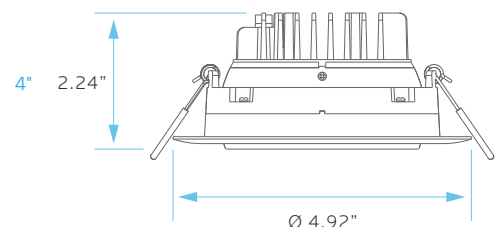

CUTOUT: 4.25"

## ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	LUMEN EFFICACY	LIFETIME	COST/YR	
2"	RD	LR23236	LED5W/DL2/GB/5CCT/FL	5	120V	80	50,000	\$ 0.60
		LR23242	LED5W/DL2/GB/5CCT/RD/BK	5	120V	80	50,000	\$ 0.60
3"	RD	LR23220	LED8W/DL3/GB/5CCT/RD	8	120V	75	50,000	\$ 0.96
		LR23221	LED8W/DL3/GB/5CCT/RD/BK	8	120V	75	50,000	\$ 0.96
	SQ	LR23222	LED8W/DL3/GB/5CCT/SQ	8	120V	75	50,000	\$ 0.96
4"	RD	LR23225	LED11W/DL4/GB/5CCT/RD	11	120V	91	50,000	\$ 1.32
		LR23226	LED11W/DL4/GB/5CCT/RD/BK	11	120V	91	50,000	\$ 1.32

## PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	FLOOD	ETL	ENERGY STAR	PLATE (KNOCKOUT)
LR23242	LED5W/DL2/GB/5CCT/RD/BK	2700K/3000K/3500K/4000K/5000K	CCT SELECT	400	90	40°	YES		LR41004 (#0)
LR23236	LED5W/DL2/GB/5CCT/FL	2700K/3000K/3500K/4000K/5000K	CCT SELECT	400	90	40°	YES	YES	LR41004 (#0)
LR23220	LED8W/DL3/GB/5CCT/RD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	600	90	40°	YES	YES	LR41004 (#1)
LR23221	LED8W/DL3/GB/5CCT/RD/BK	2700K/3000K/3500K/4000K/5000K	CCT SELECT	600	90	40°	YES		LR41004 (#1)
LR23222	LED8W/DL3/GB/5CCT/SQ	2700K/3000K/3500K/4000K/5000K	CCT SELECT	600	80	40°	YES		LR41004 (#1)
LR23225	LED11W/DL4/GB/5CCT/RD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	80	40°	YES	YES	LR41002 (#1)
LR23226	LED11W/DL4/GB/5CCT/RD/BK	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	80	40°	YES		LR41002 (#1)

COMPATIBLE WITH:

**LR35126**  
Emergency LED Driver



**LR41002**  
New Construction Mounting Plate




KNOCKOUTS



KNOCKOUT SIZE

#0 Ø3.14" (Ø80 mm)  
#1 Ø4.33" (Ø110 mm)  
#2 Ø6.29" (Ø160 mm)

**LR41004**  
New Construction Mounting Plate



KNOCKOUTS



KNOCKOUT SIZE

#0 Ø2.125" (Ø54 mm)  
#1 Ø2.83" (Ø72 mm)  
#2 Ø3.75" (Ø95 mm)  
#3 Ø5.19" (Ø132 mm)