


## LED SPOTLIGHT-CANLESS REGRESSED INTERCHANGEABLE TRIM 1" MODULE




1" MODULE

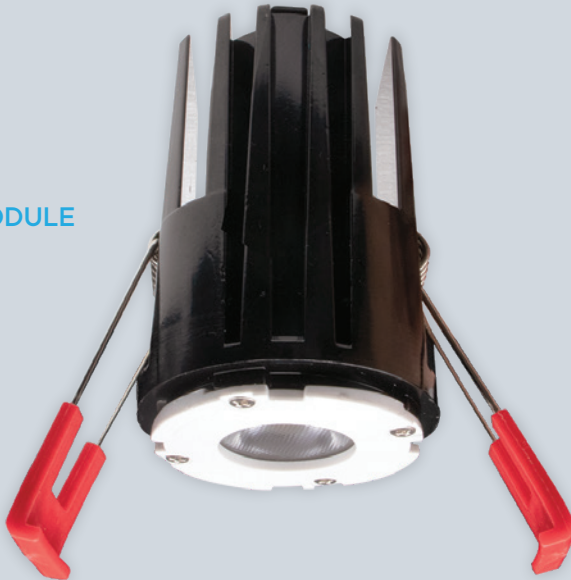

WHITE ROUND  
TRIM INCLUDED

INTERCHANGEABLE TRIMS



\*SOLD SEPARATELY



5 CCT SWITCH  
ON THE BACK

CRI  
90

COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K


DIMMABLE

TRIAC


IC  
RATED

WET  
LOCATION  
RATED


5  
YEAR  
WARRANTY

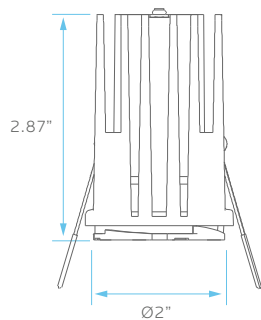

CUTOUT: Ø 2.12"



ROUND TRIM REPLACEMENT

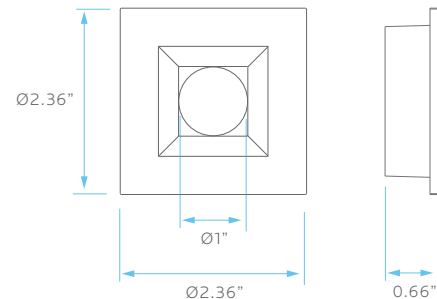

SQUARE TRIM REPLACEMENT

## ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	FLOOD	LIFETIME	COST/YR
1"	LR23460	LED/DLMD1/5CCT/RD/WT	7	120V	71	30°	50,000	\$ 0.84

## PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	ETL LISTED	PLATE (KNOCKOUT)
LR23460	LED/DLMD1/5CCT/RD/WT	2700K/3000K/3500K/4000K/5000K	CCT SELECT	500	90	YES	LR41004 (#0)

## INTERCHANGEABLE TRIMS



LR23461



LR23462



LR23463


	MODEL	DESCRIPTION	FINISH
ROUND	LR23461	LED/DLMD1/TRM/RD/BK	ROUND SMOOTH BLACK
	LR23462	LED/DLMD1/TRM/SQ/WT	SQUARE SMOOTH WHITE
	LR23463	LED/DLMD1/TRM/SQ/BK	SQUARE SMOOTH BLACK

COMPATIBLE WITH:

**LR35126**  
Emergency LED Driver



**LR41004**  
New Construction Mounting Plate



KNOCKOUTS		KNOCKOUT SIZE	
#0	#1	#0	Ø2.125" (Ø54 mm)
#1	#2	#1	Ø2.83" (Ø72 mm)
#2	#3	#2	Ø3.75" (Ø95 mm)
		#3	Ø5.19" (Ø132 mm)