

## LED CANLESS SPOTLIGHT GIMBAL MINI PANEL - CCT SELECT 4", 6"



4"



6"

**CRI  
80**

**COLOR SELECTABLE**

2700K | 3000K | 3500K | 4000K | 5000K

**WET  
LOCATION  
RATED**



**IC  
RATED**

**15°  
SWIVEL  
ANGLE**

**DIMMABLE**

**HIGH  
OUTPUT**

**5  
YEAR  
WARRANTY**

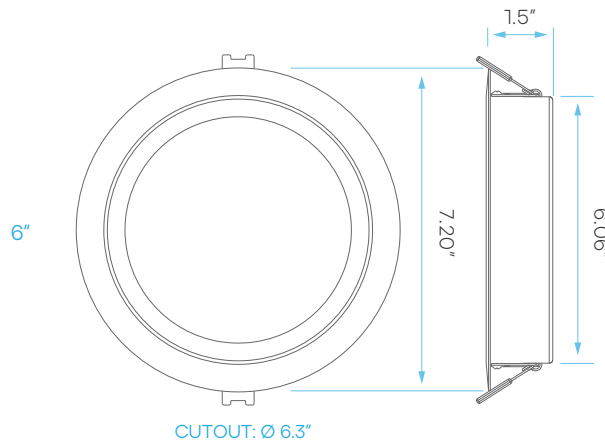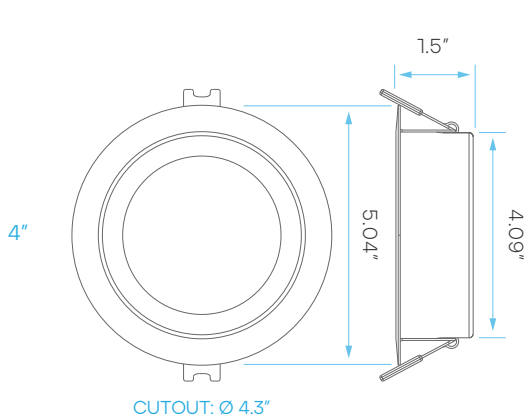

## ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR
4"	<a href="#">LR23742</a>	LED/MINI4/PANEL/5CCT/RD/GB/HO	12	120V	79	50,000	\$ 1.44
6"	<a href="#">LR23746</a>	LED/MINI6/PANEL/5CCT/RD/GB/HO	15	120V	79	50,000	\$ 1.80

## PHOTOMETRIC


MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	ETL	ENERGY STAR	PLATE (KNOCKOUT)
<a href="#">LR23742</a>	LED/MINI4/PANEL/5CCT/RD/GB/HO	2700K/3000K/3500K/4000K/5000K	CCT SELECT	950	80	YES	YES	LR41002 (#1)
<a href="#">LR23746</a>	LED/MINI6/PANEL/5CCT/RD/GB/HO	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1400	80	YES	YES	LR41002 (#2)

COMPATIBLE WITH:

**LR35126**  
Emergency LED Driver



**LR41002**  
New Construction Mounting Plate



KNOCKOUTS

KNOCKOUT SIZE

#0	Ø3.14" (Ø80 mm)
#1	Ø4.33" (Ø110 mm)
#2	Ø6.29" (Ø160 mm)