

LED CANLESS SPOTLIGHT


COMMERCIAL DOWNLIGHT - CCT & WATTAGE SELECTABLE

UNIVERSAL VOLTAGE/DUAL DIMMING - VERY HIGH OUTPUT

3", 4", 6", 8"




3"

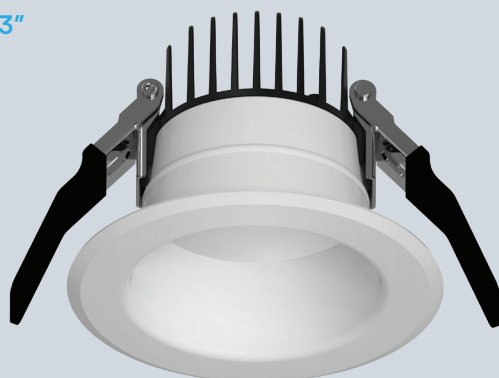

LR23979

9W | 12W | 15W

4"

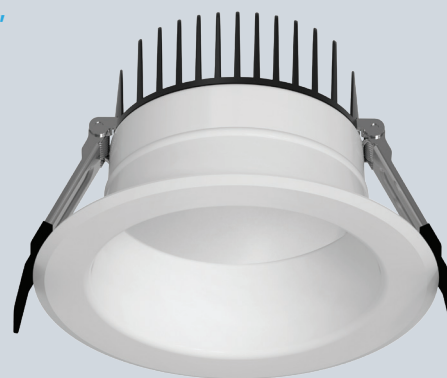

LR23980

12W | 16W | 20W


6"



LR23981

30W | 40W | 50W

8"

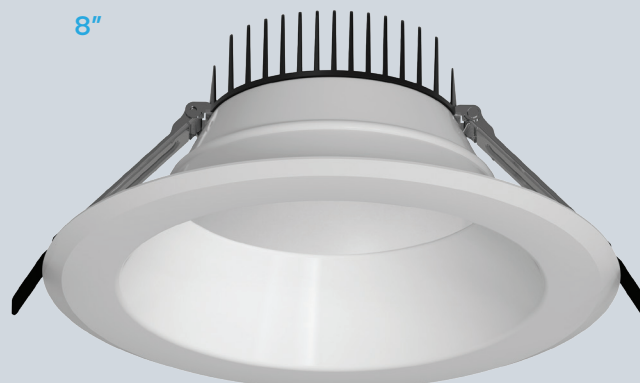

LR23982

50W | 65W | 80W

CRI
90

COLOR SELECTABLE

2700K | 3000K | 3500K | 4000K | 5000K

WATTAGE
SELECTABLE

3 OPTIONS

VERY
HIGH
OUTPUT

DUAL
DIMMING
TRIAC
0-10V

IC
RATED

WET
LOCATION
RATED

120-
277V

5
YEAR
WARRANTY

ELECTRICAL

	MODEL	DESCRIPTION	POWER	LUMENS	EFFICACY	INPUT VOLTS	DIMMABLE	LIFETIME	COST/YR
3"	LR23979	LED/CDL3/VHO/3WO/5CCT/JB/UNV/DD	9	900	100	120-277V	TRIAC/0-10V	50,000	\$ 1.80
			12	1200					
			15	1500					
4"	LR23980	LED/CDL4/VHO/3WO/5CCT/JB/UNV/DD	12	1200	100	120-277V	TRIAC/0-10V	50,000	\$ 2.40
			16	1600					
			20	2000					
6"	LR23981	LED/CDL6/VHO/3WO/5CCT/JB/UNV/DD	30	3000	100	120-277V	TRIAC/0-10V	50,000	\$ 6.00
			40	4000					
			50	5000					
8"	LR23982	LED/CDL8/VHO/3WO/5CCT/JB/UNV/DD	50	5000	100	120-277V	TRIAC/0-10V	50,000	\$ 9.63
			65	6500					
			80	8000					

PHOTOMETRIC


MODEL	DESCRIPTION	COLOR (CCT)	TEMP	FLOOD°	CRI	UL	TITLE 24	ENERGY STAR
LR23979	LED/CDL3/VHO/3WO/5CCT/JB/UNV/DD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	80°	90	YES	YES	YES
LR23980	LED/CDL4/VHO/3WO/5CCT/JB/UNV/DD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	80°	90	YES	YES	YES
LR23981	LED/CDL6/VHO/3WO/5CCT/JB/UNV/DD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	80°	90	YES	YES	YES
LR23982	LED/CDL8/VHO/3WO/5CCT/JB/UNV/DD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	80°	90	YES	YES	YES

COMPATIBLE WITH:

LR35126
Emergency LED Driver



LR41002
New Construction Mounting Plate



LR23979 COMPATIBLE CUTOUT #0
LR23980 COMPATIBLE CUTOUT #1
LR23981 COMPATIBLE CUTOUT #2


LR23979 COMPATIBLE CUTOUT R0
LR23980 COMPATIBLE CUTOUT R1
LR23981 COMPATIBLE CUTOUT R3

LR41010
New Construction Mounting Plate



KNOCKOUT SIZE		KNOCKOUTS		KNOCKOUT SIZE	
#L0	Ø2.12" (Ø54 mm)	#0	#1	#R0	Ø3.25" (Ø82 mm)
#L1	Ø2.83" (Ø72 mm)	#2	#3	#R1	Ø4.33" (Ø110 mm)
#L2	Ø3.75" (Ø95 mm)			#R2	Ø5.25" (Ø132 mm)
				#R3	Ø6.25" (Ø160 mm)


LR41006
New Construction Mounting Plate




KNOCKOUTS		KNOCKOUT SIZE	
#0	#1	#0	Ø2.12" (Ø54 mm)
#2	#3	#1	Ø3.15" (Ø80 mm)
#4	#5	#2	Ø3.75" (Ø95 mm)
		#3	Ø4.25" (Ø108 mm)
		#4	Ø5.25" (Ø132 mm)
		#5	Ø6.25" (Ø159 mm)

LR23979 COMPATIBLE CUTOUT #1
LR23980 COMPATIBLE CUTOUT #3
LR23981 COMPATIBLE CUTOUT #5


DIMENSIONS

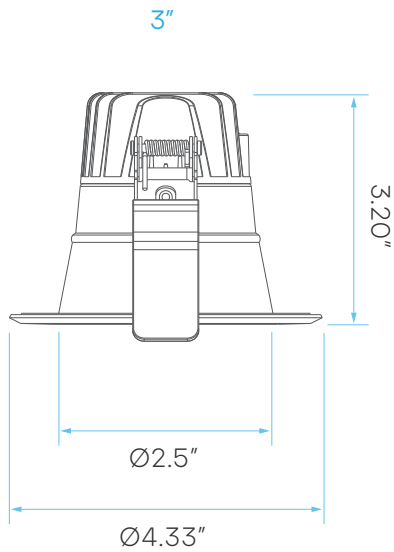


CUTOUT: Ø3"

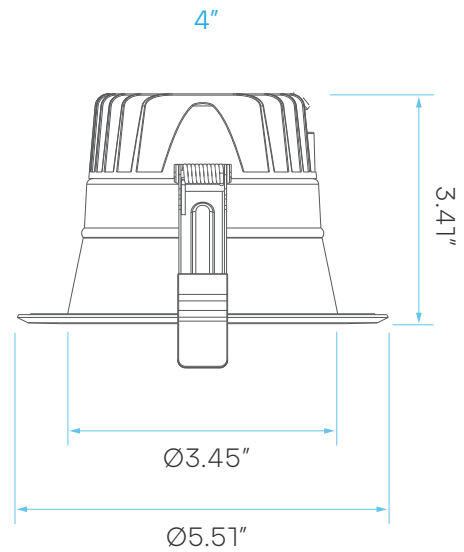

CUTOUT: Ø4.125"

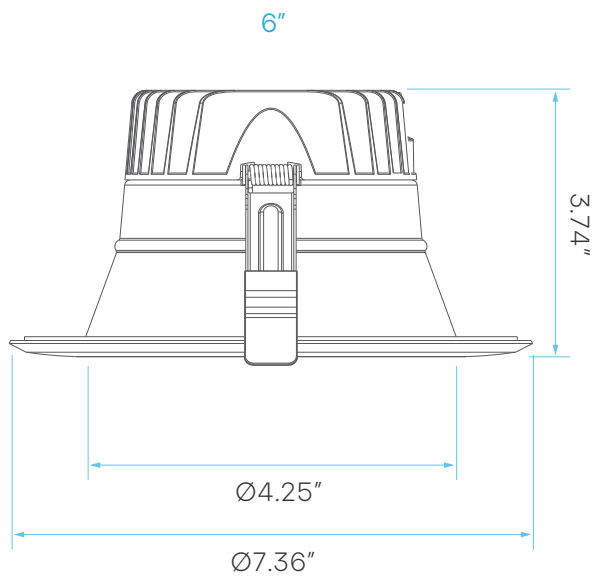

CUTOUT: Ø6"

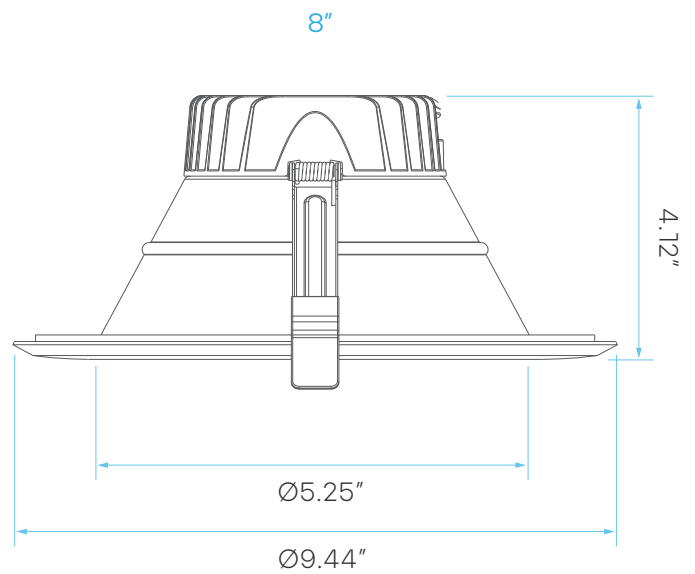

CUTOUT: Ø 8.06"