


TX1 SLIM SURFACE MOUNT PANEL - CCT & WATTAGE SELECTABLE LR24010



PART	DESCRIPTION	QTY
A	FIXTURE & MOUNTING PLATE	1
B	Ø13.2*40mm EXPANSION RUBBER PLUG	2
C	ST4.2*30 SELF TAPPING SCREW	2
D	#32 US BOLTS	2
E	P2 TERMINAL	2
F	3-HOLE WIRING TERMINAL	3



(A)

(B)



(C)



(D)




(E)




(F)




INSTRUCTIONS

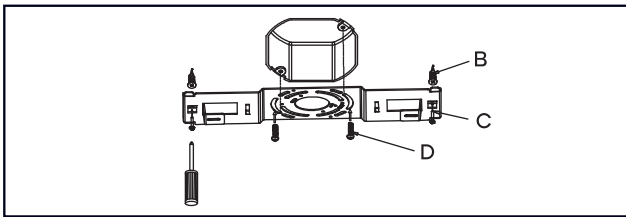


1. Attach the installation plate to the ceiling box with screws D, and use expansion rubber plug B and locking screw C to tighten and attach the mounting plate.

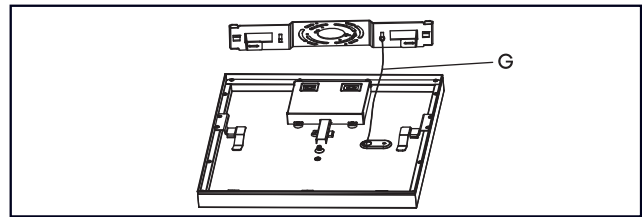


2. Hang the safety rope G on the mounting plate.

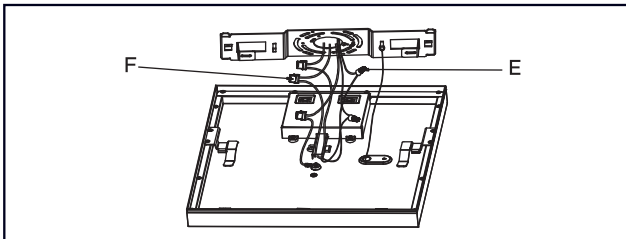


3. Connect the dimming light with P2 terminal E, and connect the power line and ground wire with the 3 hole wiring terminal F (bare copper wire to green ground wire, other wire colors match.)

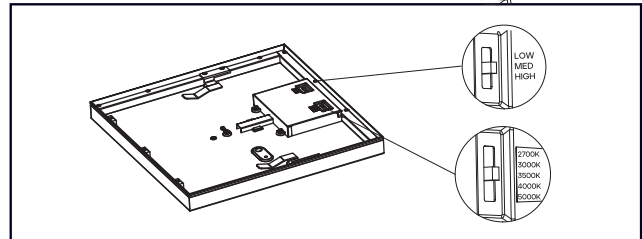


4. Turn the power switch and color temperature switch to the desired setting.

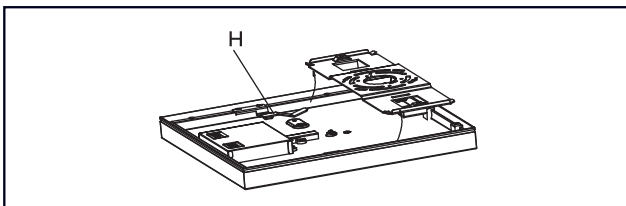

5. Align the inner edge of the aluminium frame of the fixture with both sides of the mounting plate, closely adhere to the ceiling, and ensure that the mounting plate is positioned in front of the bracket H on fixture.

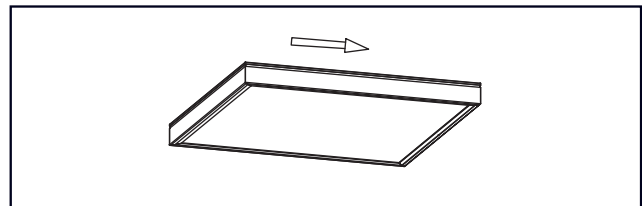

6. Push the fixture towards the mounting plate position to make the bracket of the fixture snap into the mounting plate position.

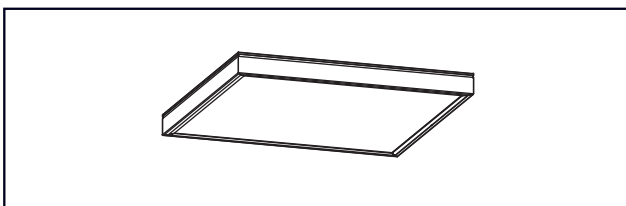

7. Installation completed.