2X2, 2X4 LED FRAME PANEL – 3 CCT & WATTAGE SELECTABLE
LR24185, LR24187

- LED Driver
- LED Chip
- CCT Adjustment
- PC Cover
- Power Regulation
- Aluminum Sash
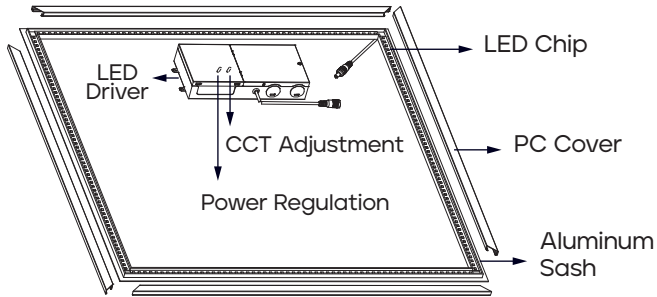
WARNING

– MAKE SURE POWER IS OFF BEFORE INSTALLING
– ALL THE INSTALLATIONS ARE REQUIRED TO BE DONE BY PROFESSIONALS.

INSTALLATION INSTRUCTIONS

SHUT OFF POWER BEFORE INSTALLATION

PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION AND KEEP FOR REFERENCE

STEP 1. Remove the ceiling tile where you need to install the Frame Panel
STEP 2. Carefully place Frame Panel on the T-bar and make sure it is secure and in place.
STEP 3. Place the driver on top of the adjoining ceiling tile
STEP 4. Connect the driver to the Frame Panel
STEP 5. Open the driver's junction box and connect AC wire to driver (L= Black, N= White)
STEP 6. Place ceiling tile on top of Frame Panel

GND — YELLOW & GREEN

AC - N — WHITE
AC - L — BLACK

LED DRIVER

FRAME PANEL

DIM +
DIM -