

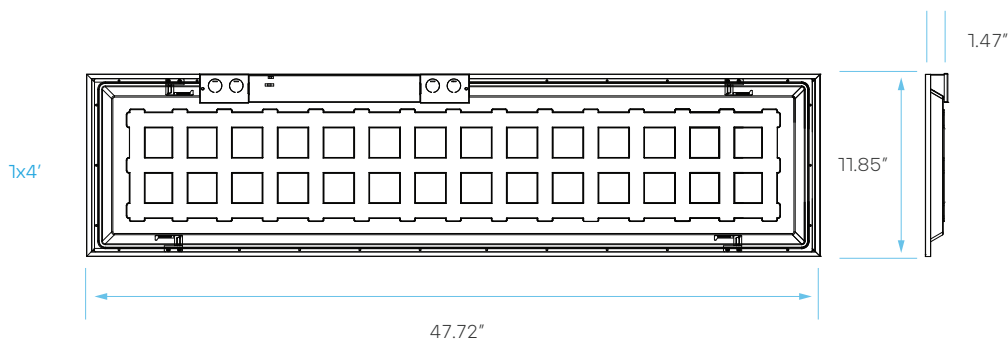



LED LAY IN FLAT PANEL - BACKLIT ANTI-GLARE 1X4', 2X2', 2X4'

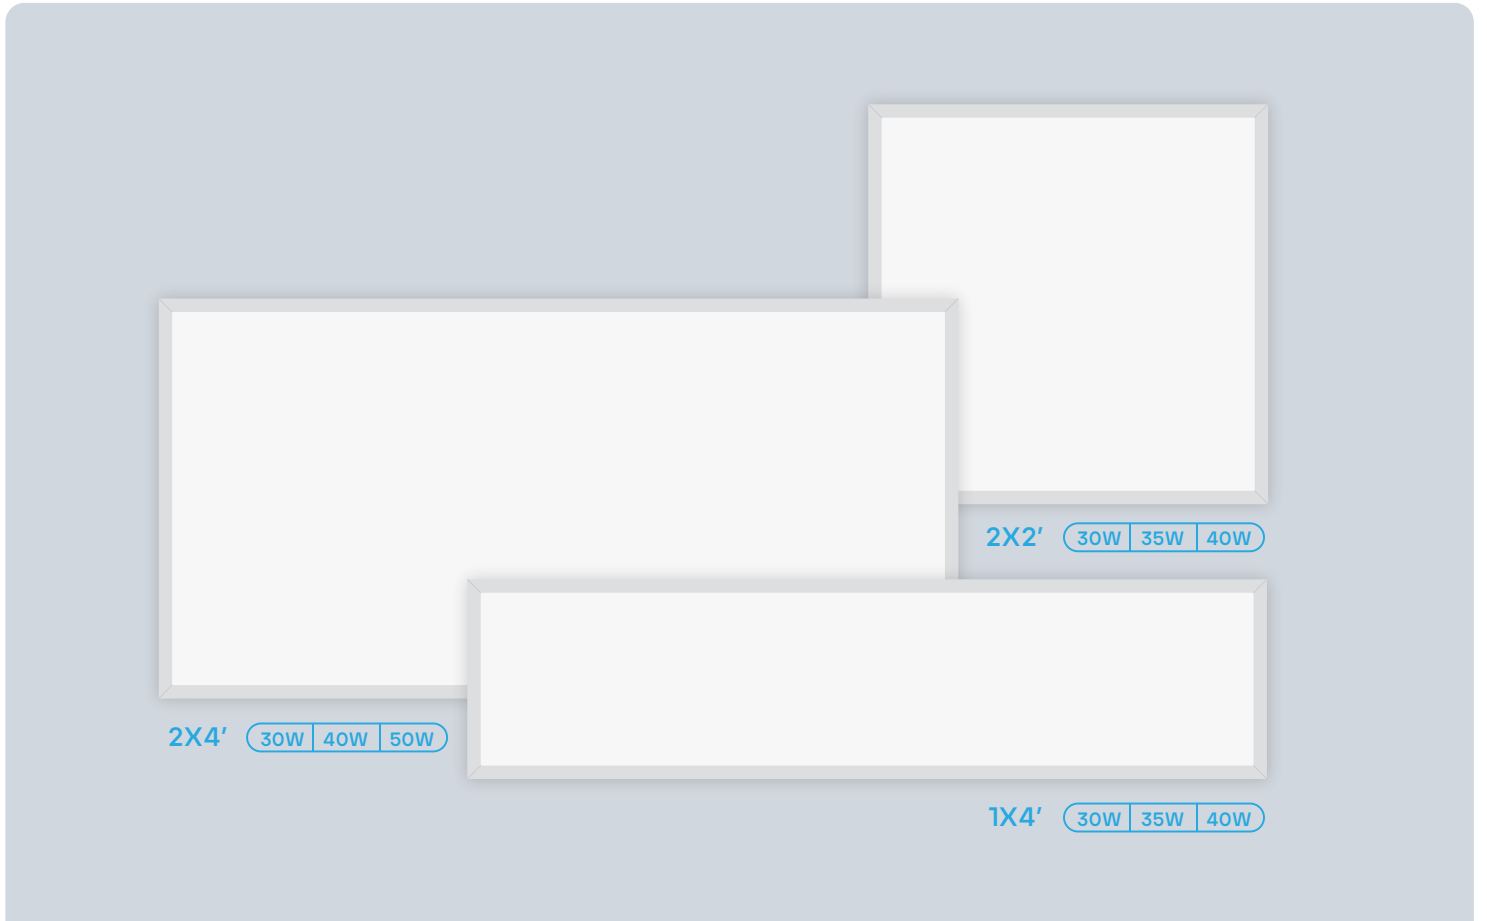

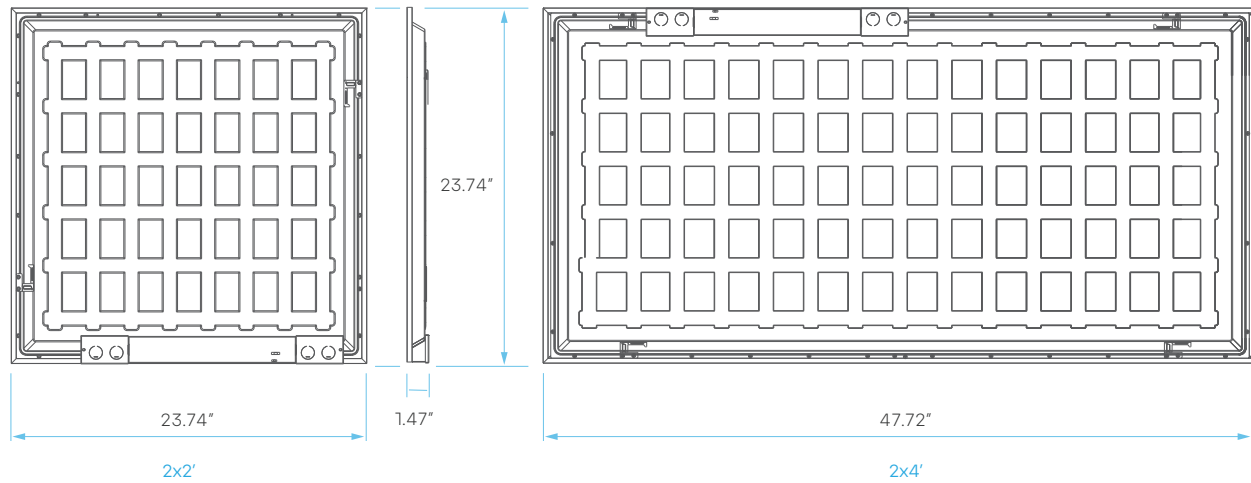

ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR
2x2	LR24250	LED2X2BPNL/3WO/3CCTD/AG/D	30	100-277V	125	50,000	\$ 4.81
			35				
			40				
2x4	LR24253	LED2X4BPNL/3WO/3CCTD/AG/D	30	100-277V	125	50,000	\$ 6.02
			40				
			50				
1x4	LR24255	LED1X4BPNL/3WO/3CCTD/AG/D	30	100-277V	125	50,000	\$ 4.81
			35				
			40				

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	UL	DLC
LR24250	LED2X2BPNL/3WO/3CCTD/AG/D	4000K	CCT SELECT	3750	80	YES	PREMIUM
		5000K		4375			
		6500K		5000			
LR24253	LED2X4BPNL/3WO/3CCTD/AG/D	4000K	CCT SELECT	3750	80	YES	PREMIUM
		5000K		5000			
		6500K		6250			
LR24255	LED1X4BPNL/3WO/3CCTD/AG/D	4000K	CCT SELECT	3750	80	YES	PREMIUM
		5000K		4375			
		6500K		5000			