


## LED LAY IN BACKLIT FLAT PANEL - 5CCT & WATTAGE SELECTABLE 1X4', 2X2', 2X4'

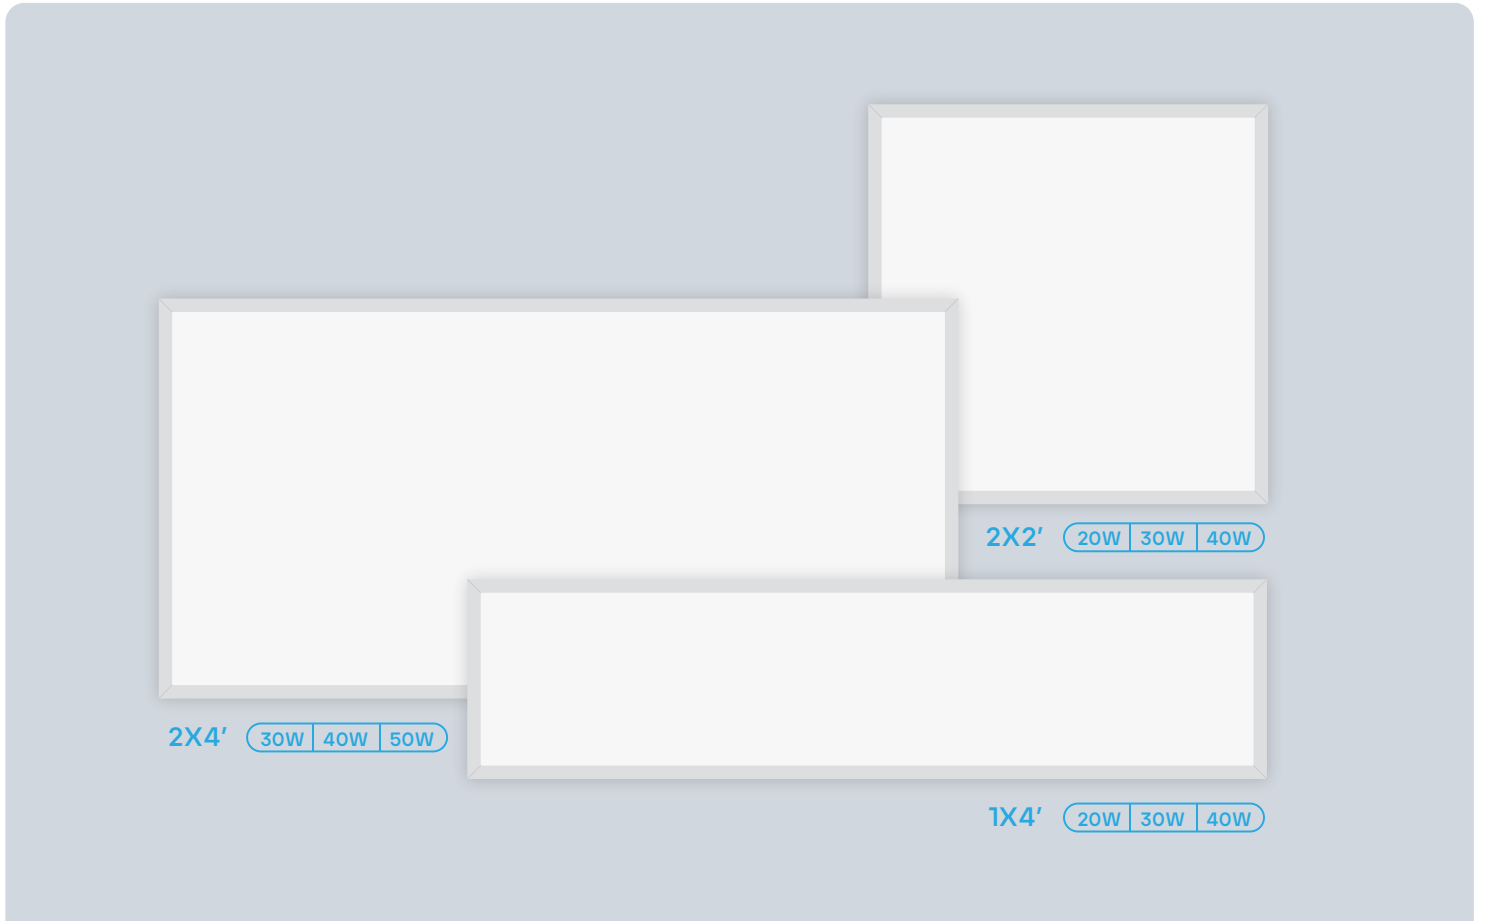

CRI 80

COLOR SELECTABLE  
3000K | 3500K | 4000K | 5000K | 6500K


WATTAGE SELECTABLE  
3 OPTIONS


DIMMABLE  
0-10V

IC RATED

DAMP LOCATION RATED

5 YEAR WARRANTY

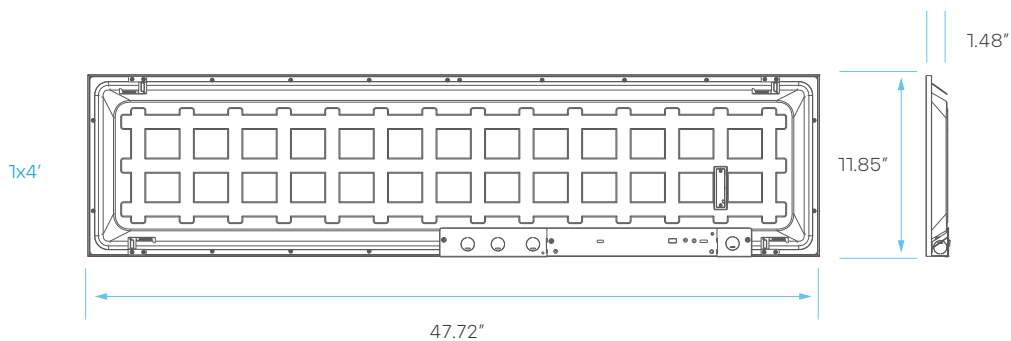

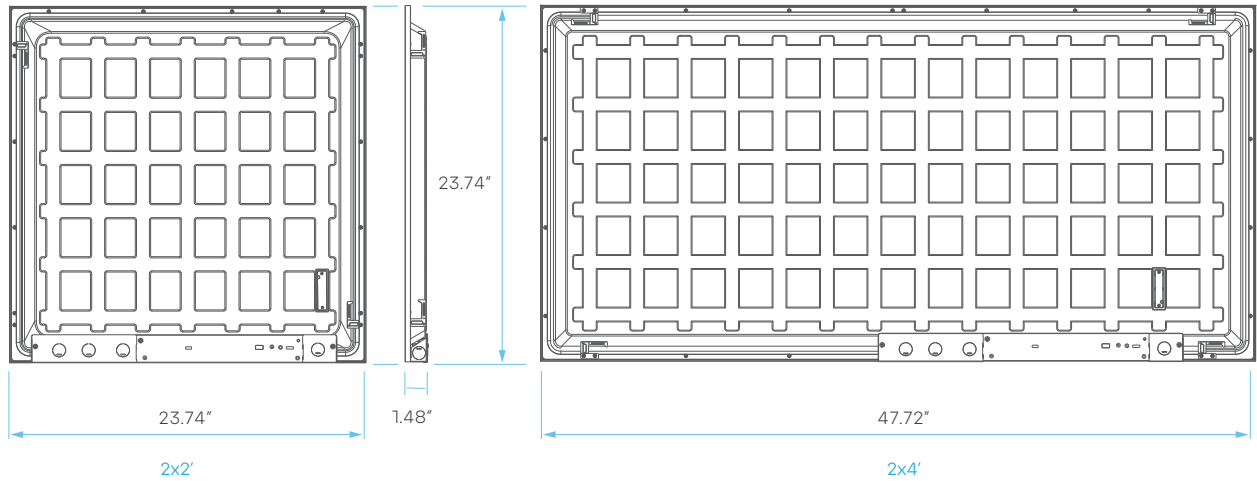

## ELECTRICAL

	MODEL	DESCRIPTION	POWER	LUMEN	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR
2X2	LR24290	LED2X2BPNL/3WO/5CCT/D	20	2500	120-277V	125	50,000	\$ 4.81
			30	3750				
			40	5000				
2X4	LR24293	LED2X4BPNL/3WO/5CCT/D	30	3750	120-277V	125	50,000	\$ 6.02
			40	5000				
			50	6250				
1X4	LR24295	LED1X4BPNL/3WO/5CCT/D	20	2500	120-277V	125	50,000	\$ 4.81
			30	3750				
			40	5000				

## PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	CRI	ETL LISTED	DLC LISTED
LR24290	LED2X2BPNL/3WO/5CCT/D	3000K/3500K/4000K/5000K/6500K	CCT SELECT	80	YES	STANDARD
LR24293	LED2X4BPNL/3WO/5CCT/D	3000K/3500K/4000K/5000K/6500K	CCT SELECT	80	YES	STANDARD
LR24295	LED1X4BPNL/3WO/5CCT/D	3000K/3500K/4000K/5000K/6500K	CCT SELECT	80	YES	STANDARD