


LED SPOTLIGHT-CANLESS TRIMLESS SPOTLIGHT - CCT SELECTABLE 1" - HIGH OUTPUT OPTION AVAILABLE

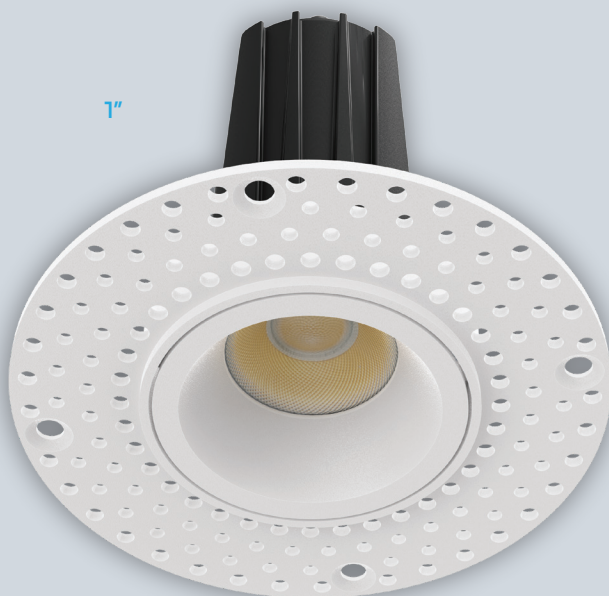



LR24916

7W | 550 LUMENS

LR24917

12W | 1000 LUMENS

HIGH OUTPUT

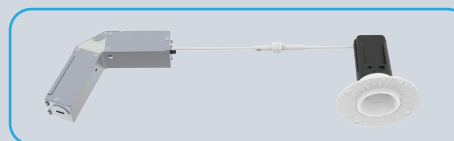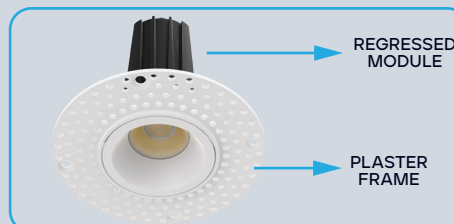

LR24917 WITH CURVED DRIVER
FOR EASY INSTALLATION



COLOR SELECTABLE

2700K | 3000K | 3500K | 4000K | 5000K




ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	FLOOD	LIFETIME	COST/YR
1"	LR24916	LED/TLMD1/5CCT/RD/WT	7	120V	78	38°	50,000	\$ 0.84
	LR24917	TLMD1HO/5CCT/RD/WT	12	120V	83	38°	50,000	\$ 1.44


PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	ETL LISTED	PLATE (KNOCKOUT)
LR24916	LED/TLMD1/5CCT/RD/WT	2700K/3000K/3500K/4000K/5000K	CCT SELECT	550	80	YES	LR41004 (#1) LR41010 (L1)
LR24917	TLMD1HO/5CCT/RD/WT	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	80	YES	

DIMENSIONS

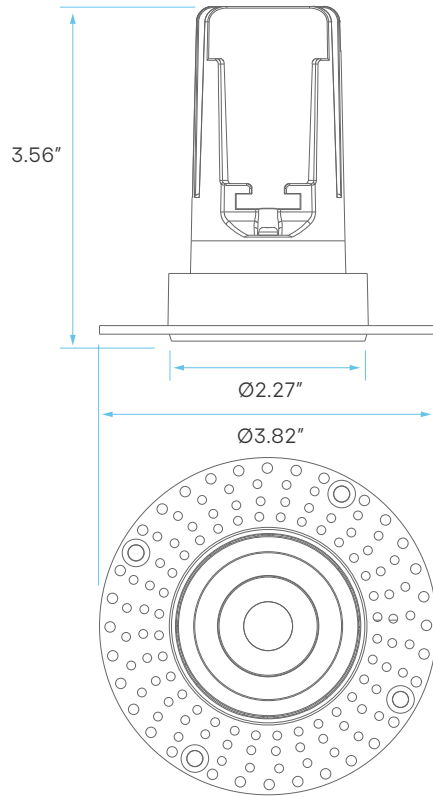

LR24916
CUTOUT: Ø 2.24"

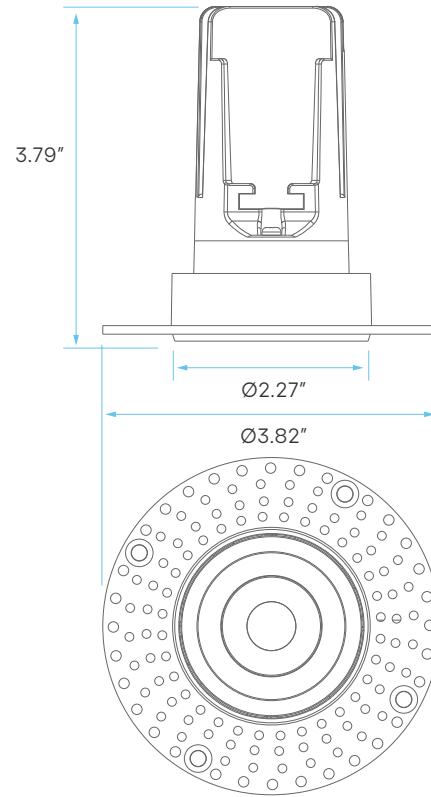

LR24917
CUTOUT: Ø 2.36"


COMPATIBILITY

COMPATIBLE
WITH:

LR35126
Emergency
LED Driver



LR41004
New Construction
Mounting Plate



KNOCKOUTS	
#0	Ø2.125" (Ø54 mm)
#1	Ø2.83" (Ø72 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø5.19" (Ø132 mm)

LR41010
New Construction
Mounting Plate



KNOCKOUT SIZE	
#L0	Ø2.12" (Ø54 mm)
#L1	Ø2.83" (Ø72 mm)
#L2	Ø3.75" (Ø95 mm)



KNOCKOUT SIZE	
#R0	Ø3.25" (Ø82 mm)
#R1	Ø4.33" (Ø110 mm)
#R2	Ø5.25" (Ø132 mm)
#R3	Ø6.25" (Ø160 mm)