
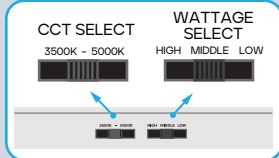


LED LINEAR STRIP SLIM - HIGH OUTPUT 48", 96" - CCT & WATTAGE SELECTABLE

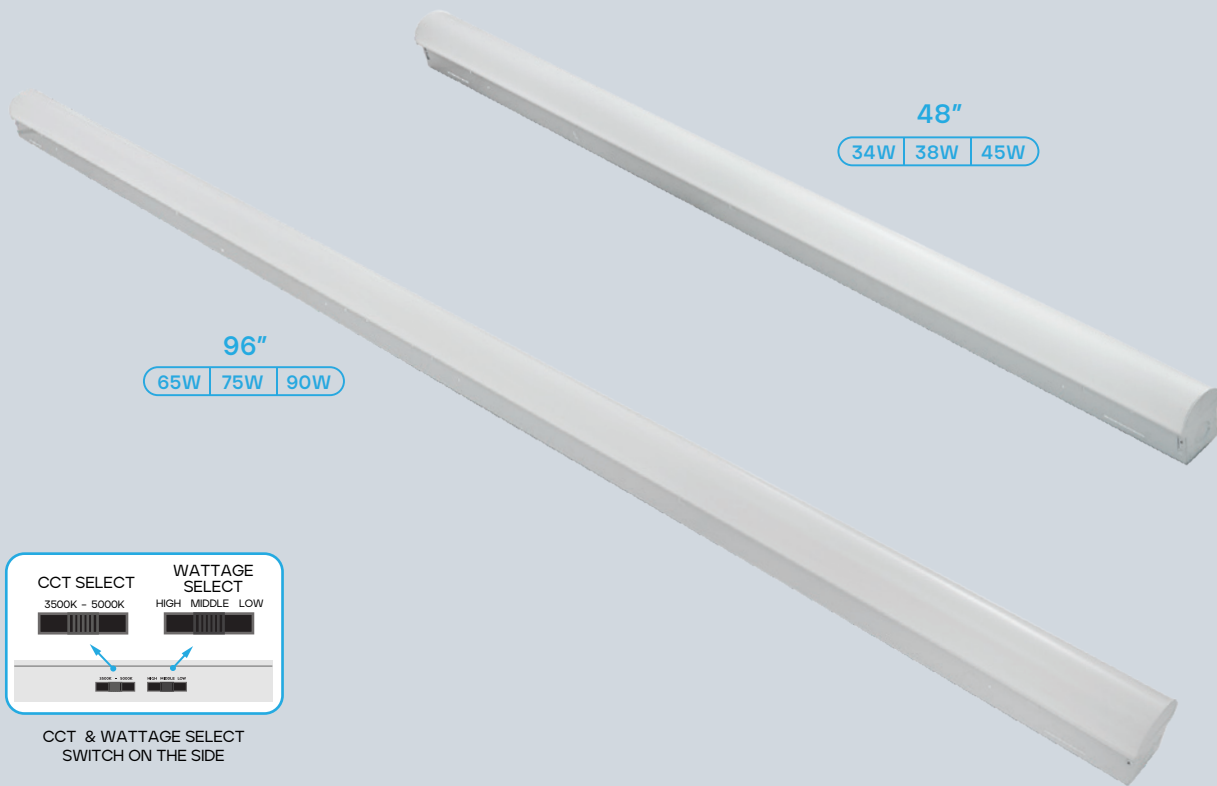

CCT & WATTAGE SELECT SWITCH ON THE SIDE

CRI 82

COLOR SELECTABLE
3500K 4000K 5000K


DIMMABLE
0-10V


120-277V

LIFE HR
50,000

DAMP LOCATION RATED

5 YEAR WARRANTY

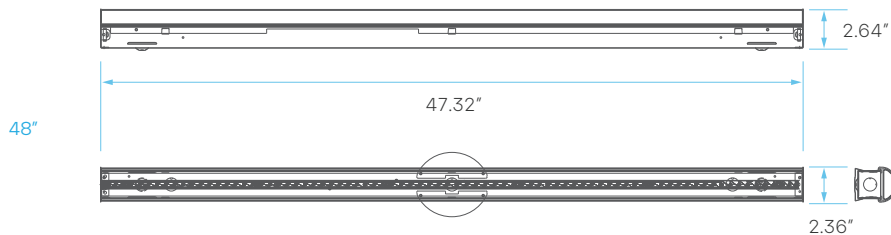

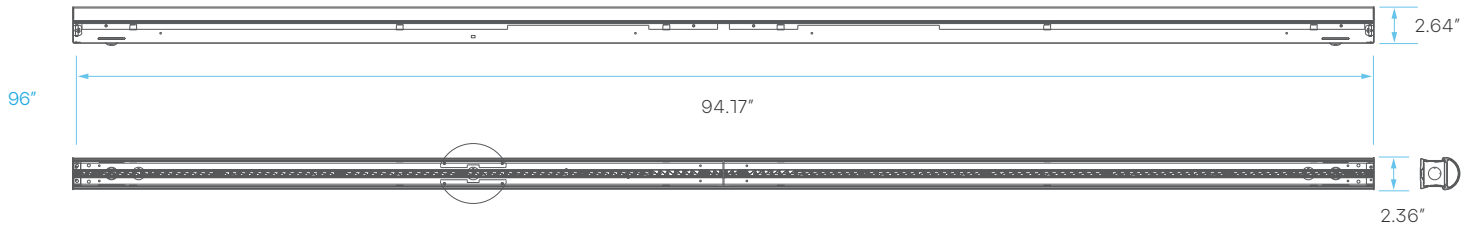

ELECTRICAL

	MODEL	DESCRIPTION	POWER	LUMEN	COLOR (CCT)	DLC
48"	LR25185	LED48/LINEAR/3CCT/3WO/UNV/D/HO	34	3500K - 4726	3500K	YES
				4000K - 4760		
				5000K - 4794		
	LR25185+EM	LED48/LINEAR/3CCT/3WO/UNV/D/HO+EM	38	3500K - 5168	4000K	
				4000K - 5206	5000K	
				5000K - 5244	SELECTABLE	
96"	LR25187	LED96/LINEAR/3CCT/3WO/UNV/D/HO	65	3500K - 9035	3500K	YES
				4000K - 9100		
				5000K - 9165		
	LR25187+EM	LED96/LINEAR/3CCT/3WO/UNV/D/HO+EM	75	3500K - 10200	4000K	
				4000K - 10275	5000K	
				5000K - 10350	SELECTABLE	
			90	3500K - 11970		
				4000K - 12060		
				5000K - 12150		

EMERGENCY DRIVER
*INTEGRAL

LR35121
EMERGENCY LED DRIVER




EMERGENCY LED DRIVER 8-15W LR35120, LR35121



FEATURES

- Meets most of safety standards for lighting
- Standard CSA C22.2 NO. 141, UL924
- External lithium battery
- **Battery protection: Overcharge protection, over discharge protection, short circuit protection.**
- Indicator shows a variety of working modes
- The batteries meet 500 cycles of standard CH and standard DCH
- RoHS compliant
- Emergency 1.5 Hrs

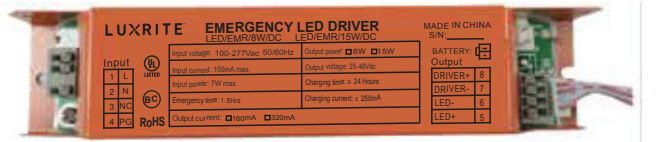


LED/EMR/8W/DC

LED/EMR/15W/DC

SPECIFICATIONS

Universal Input Voltage	100-277VAC, 50/60Hz
AC Input Current	100mA max
AC Input Power Rating	7.0W max
Output Current and Voltage	160-320mA 25-48Vdc
Output Power	8W/15W
Emergency Time	≥ 90 mins
Full Warranty	5 Years
Test Switch Indicator Light	Illuminated Test Switch, indicator light
Battery	Li-ion battery 7.4V/2500mAH Li-ion battery 14.8V/2000mAH
Battery Charging Current	250mA
Recharge Time	≥ 24 Hours
Temperature Rating (Ambient)	Li-ion 0°C to 40°C (32°F to 104°F)
Dimensions	7.4"x1.5"x1.1" (188mmx38mmx29mm)



WIRING

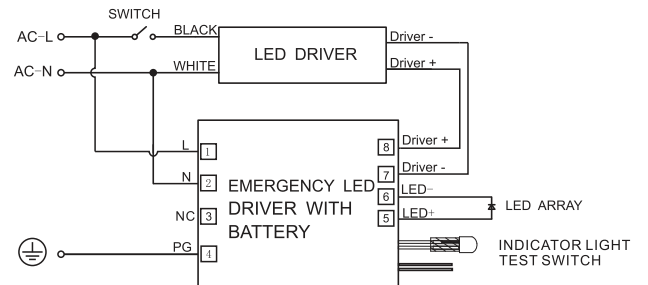


1. DO NOT MATE CONNECTOR UNTIL INSTALLATION IS COMPLETE AND AC POWER IS SUPPLIED.
2. TEST ACCESSORY LEADS-OBSERVE PROPER POLARITY WIRING.

DIMENSIONS

Case: 7.4" x 1.5" x 1.14"
(Mounting center - 7.0")

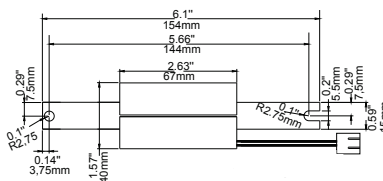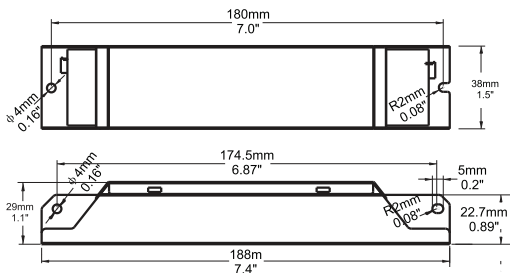

Battery: 6.1" x 1.57"

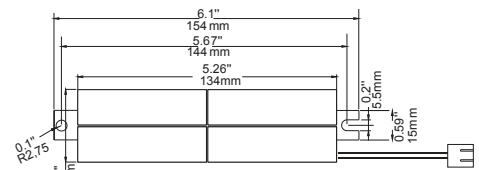

Li-ion battery 7.4V/2500mAH
Li-ion battery 14.8V/2000mAH