

LED SPOTLIGHT-CANLESS

PUSH AND LOCK TRIMLESS

1", 2", 3" & 4" - CCT SELECTABLE

BLACK, WHITE - 38°, 60°, 110° & ZOOMABLE OPTIONS



1" LR25430 - 38° LR25431 - 60°	2" LR25445 - 38° LR25446 - 60°	3" LR25450 - 38° LR25455 - 60°	3" LR25451 - 38°
3" LR25433 - 38° GIMBAL	3" LR25454 - 110° FLAT	3" LR25452 - 38° FLOATING GIMBAL	3" LR25453 - 24-50° ZOOMABLE
4" LR25462 - 60° FLOATING GIMBAL	4" LR25460 - 38° LR25465 - 60°	TRIM REPLACEMENT OPTIONS AVAILABLE* *SOLD SEPARATELY 1", 2", 3", 4" BLACK FINISH 1", 2", 3", 4" BRUSHED NICKEL FINISH 1", 2", 3", 4" BRASS FINISH 3" WHITE FINISH WALL WASHER TRIM 3" BLACK FINISH WALL WASHER TRIM	



COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K



*SELECT MODELS



*SELECT MODELS



TRIM REPLACEMENT OPTIONS AVAILABLE*











MULTIPLE
TRIM REPLACEMENT
OPTIONS AVAILABLE*



SCAN TO
EXPLORE

*SOLD SEPARATELY

EASY TRIMLESS INSTALLATION

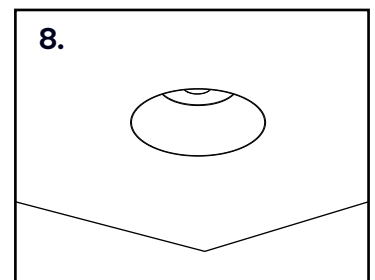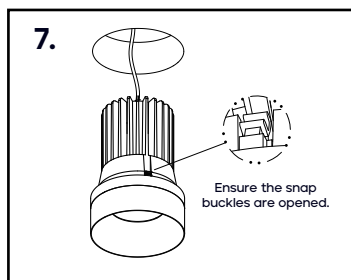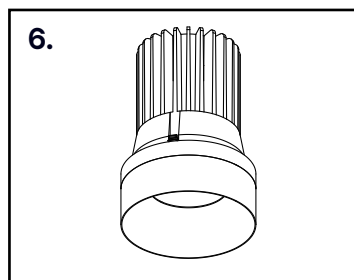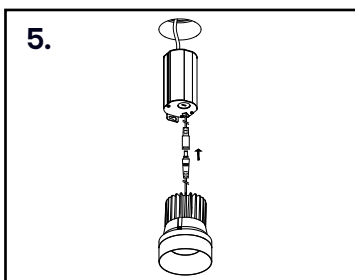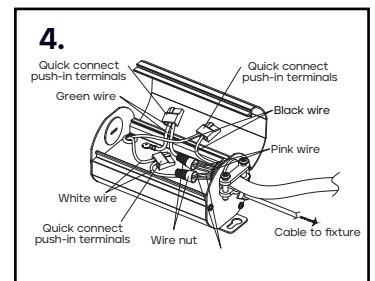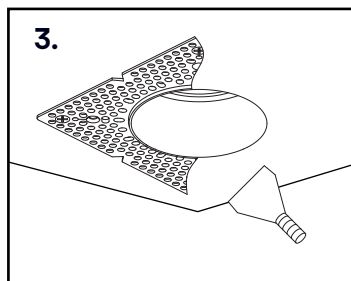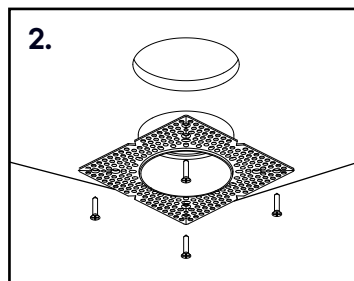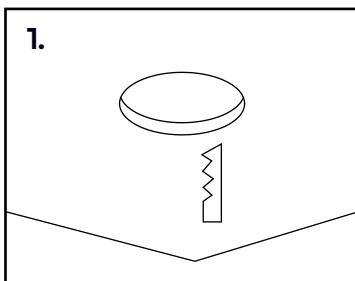

ELECTRICAL

			MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMING	EFFICACY	FLOOD	LIFETIME	COST/YR
1"	WHITE	38°	LR25430	LED/TLMD1/5CCT/RD/WT/D2	10	120V	TRIAC	85	38°	50,000	\$ 1.20
		60°	LR25431	LED/TLMD1/5CCT/RD/WT/D2/WFL	10	120V	TRIAC	85	60°	50,000	\$ 1.20
2"	WHITE	38°	LR25445	LED/TLMD2/5CCT/RD/WT/UNV/DD/FL	12	120-277V	TRIAC/0-10V	91	38°	50,000	\$ 1.44
		60°	LR25446	LED/TLMD2/5CCT/RD/WT/UNV/DD/WFL	12	120-277V	TRIAC/0-10V	91	60°	50,000	\$ 1.44
3"	WHITE	38°	LR25450	LED/TLMD3/5CCT/RD/WT/UNV/DD/FL	15	120-277V	TRIAC/0-10V	73	38°	50,000	\$ 1.80
		60°	LR25455	LED/TLMD3/5CCT/RD/WT/UNV/DD/WFL	15	120-277V	TRIAC/0-10V	73	60°	50,000	\$ 1.80
	BLACK	38°	LR25451	LED/TLMD3/5CCT/RD/BK/D	15	120V	TRIAC	73	38°	50,000	\$ 1.80
4"	WHITE	38°	LR25460	LED/TLMD4HO/5CCT/RD/WT/UNV/DD	25	120-277V	TRIAC/0-10V	80	38°	50,000	\$ 3.01
		60°	LR25465	LED/TLMD4HO/5CCT/RD/WT/UNV/DD/WFL	25	120-277V	TRIAC/0-10V	80	60°	50,000	\$ 3.01
3"	WHITE	FLAT	LR25454	LED/TLMD3/FLT/5CCT/RD/WT/UNV/DD	15	120-277V	TRIAC/0-10V	73	110°	50,000	\$ 1.80
		38°	LR25433	LED/TLMD3/GB/5CCT/RD/WT/UNV/DD/FL	12	120-277V	TRIAC/0-10V	91	38°	50,000	\$ 1.44
	WHITE	38°	LR25452	LED/TLMD3/FGB/5CCT/RD/WT/D	12	120V	TRIAC	75	38°	50,000	\$ 1.44
		60°	LR25462	LED/TLMD4HO/FGB/5CCT/RD/WT/UNV/DD	20	120-277V	TRIAC/0-10V	100	60°	50,000	\$ 2.40
3"	ZM	~°	LR25453	LED/TLMD3/5CCT/RD/WT/UNV/DD/ZM	15	120-277V	TRIAC/0-10V	73	20-50°	50,000	\$ 1.80

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	ETL	PLATE (KNOCKOUT)
LR25430	LED/TLMD1/5CCT/RD/WT/D2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	850	90	YES	LR41004 (#1) LR41010 (#L1)
LR25431	LED/TLMD1/5CCT/RD/WT/D2/WFL	2700K/3000K/3500K/4000K/5000K	CCT SELECT	850	90	YES	
LR25445	LED/TLMD2/5CCT/RD/WT/UNV/DD/FL	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	90	YES	LR41006 (#1) LR41010 (#R0)
LR25446	LED/TLMD2/5CCT/RD/WT/UNV/DD/WFL	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1100	90	YES	
LR25450	LED/TLMD3/5CCT/RD/WT/UNV/DD/FL	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1100	90	YES	
LR25455	LED/TLMD3/5CCT/RD/WT/UNV/DD/WFL	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1100	90	YES	LR41004 (#2) LR41006 (#2) LR41010 (#R0)
LR25451	LED/TLMD3/5CCT/RD/BK/D	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1100	90	YES	
LR25460	LED/TLMD4HO/5CCT/RD/WT/UNV/DD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	2000	90	YES	LR41006 (#3) LR41010 (#L1)
LR25465	LED/TLMD4HO/5CCT/RD/WT/UNV/DD/WFL	2700K/3000K/3500K/4000K/5000K	CCT SELECT	2000	90	YES	
LR25454	LED/TLMD3/FLT/5CCT/RD/WT/UNV/DD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1100	90	YES	
LR25433	LED/TLMD3/GB/5CCT/RD/WT/UNV/DD/FL	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1100	90	YES	LR41004 (#2) LR41006 (#2) LR41010 (#R0)
LR25452	LED/TLMD3/FGB/5CCT/RD/WT/D	2700K/3000K/3500K/4000K/5000K	CCT SELECT	900	90	YES	
LR25462	LED/TLMD4HO/FGB/5CCT/RD/WT/UNV/DD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	2000	90	YES	LR41006 (#3) LR41010 (#L1)
LR25453	LED/TLMD3/5CCT/RD/WT/UNV/DD/ZM	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1100	90	YES	LR41004 (#2) LR41006 (#2) LR41010 (#R0)

AVAILABLE TRIM REPLACEMENT OPTIONS

*SOLD SEPARATELY


1"



LR25421
BLACK FINISH



LR25422
BRUSHED NICKEL



LR25423
BRASS FINISH


2"



LR25441
BLACK FINISH



LR25442
BRUSHED NICKEL




LR25443
BRASS FINISH

3"



LR25444
BLACK FINISH



LR25447
BRUSHED NICKEL



LR25435
BRASS FINISH

3"



LR25448
WHITE FINISH
WALL WASHER TRIM



LR25449
BLACK FINISH
WALL WASHER TRIM

AVAILABLE TRIM REPLACEMENT OPTIONS

*SOLD SEPARATELY

4"



LR25466
BLACK FINISH



LR25467
BRUSHED NICKEL



LR25464
BRASS FINISH

PLASTER FRAME

*SOLD SEPARATELY



LR25457
2 HEAD - PLASTER FRAME FOR 3"



LR25458
3 HEAD - PLASTER FRAME FOR 3"



LR25459
4 HEAD - PLASTER FRAME FOR 3"

120-277V DRIVER

*SOLD SEPARATELY

	MODEL	DESCRIPTION	POWER	INPUT
15W	LR25456	LED/TLMD3/5CCT/UNV/DD/DRIVER	15	120-277V



AVAILABLE TRIM REPLACEMENT OPTIONS

*SOLD SEPARATELY

	MODEL	DESCRIPTION	FINISH
1"	LR25421	LED/TLMD1/5CCT/TRIM/RD/BK	ROUND BLACK
	LR25422	LED/TLMD1/5CCT/TRIM/RD/BN	ROUND BRUSHED NICKEL
	LR25423	LED/TLMD1/5CCT/TRIM/RD/BR	ROUND BRASS
2"	LR25441	LED/TLMD2/5CCT/TRIM/RD/BK	ROUND BLACK
	LR25442	LED/TLMD2/5CCT/TRIM/RD/BN	ROUND BRUSHED NICKEL
	LR25443	LED/TLMD2/5CCT/TRIM/RD/BR	ROUND BRASS
3"	LR25435	LED/TLMD3/TRIM/RD/BR	ROUND BRASS
	LR25444	LED/TLMD3/TRIM/RD/BK	ROUND BLACK
	LR25447	LED/TLMD3/TRIM/RD/BN	ROUND BRUSHED NICKEL
	LR25448	LED/TLMD3/WWTRIM/RD/WT	ROUND WHITE WALL WHASHER
	LR25449	LED/TLMD3/WWTRIM/RD/BK	ROUND BLACK WALL WHASHER
4"	LR25464	LED/TLMD4HO/TRIM/RD/BR	ROUND BRASS
	LR25466	LED/TLMD4HO/TRIM/RD/BK	ROUND BLACK
	LR25467	LED/TLMD4HO/TRIM/RD/BN	ROUND BRUSHED NICKEL

PLASTER FRAME OPTIONS

*SOLD SEPARATELY

MODEL	DESCRIPTION	TYPE	FINISH
LR25457	LED/TLMD3/PLT/2HD/WT	2-HEAD PLASTER FRAME	WHITE
LR25458	LED/TLMD3/PLT/3HD/WT	3-HEAD PLASTER FRAME	WHITE
LR25459	LED/TLMD3/PLT/4HDS/WT	4-HEAD PLASTER FRAME	WHITE



COMPATIBILITY

COMPATIBLE
WITH:

LR35126
Emergency
LED Driver




LR41004
New Construction
Mounting Plate



KNOCKOUT SIZE	
#0	Ø2.125" (Ø54 mm)
#1	Ø2.83" (Ø72 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø5.19" (Ø132 mm)

LR41006
New Construction
Mounting Plate



KNOCKOUT SIZE	
#0	Ø2.12" (Ø54 mm)
#1	Ø3.15" (Ø80 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø4.25" (Ø108 mm)
#4	Ø5.25" (Ø132 mm)
#5	Ø6.25" (Ø159 mm)

LR41010
New Construction
Mounting Plate




KNOCKOUT SIZE	
#L0	Ø2.12" (Ø54 mm)
#L1	Ø2.83" (Ø72 mm)
#L2	Ø3.75" (Ø95 mm)




KNOCKOUT SIZE	
#R0	Ø3.25" (Ø82 mm)
#R1	Ø4.33" (Ø110 mm)
#R2	Ø5.25" (Ø132 mm)
#R3	Ø6.25" (Ø160 mm)


DIMENSIONS

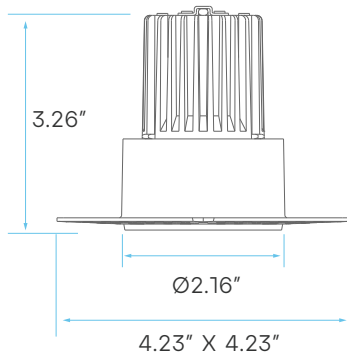


1" TRIMLESS
CUTOUT: Ø 2.5"

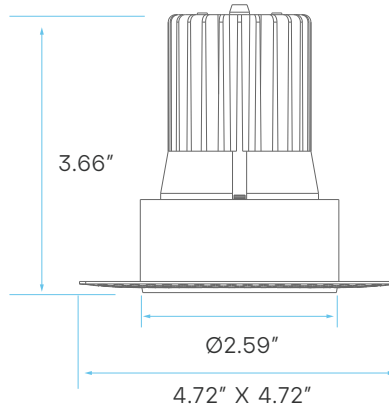


2" TRIMLESS
CUTOUT: Ø 3"

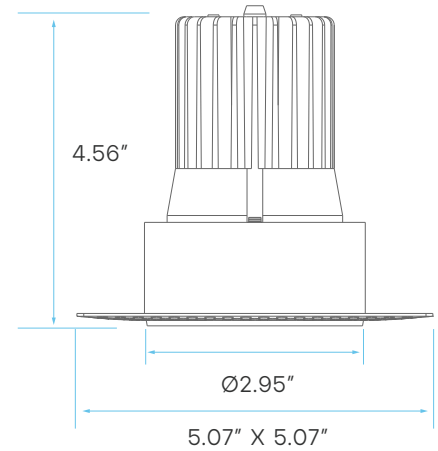


3" TRIMLESS
CUTOUT: Ø 3.38"

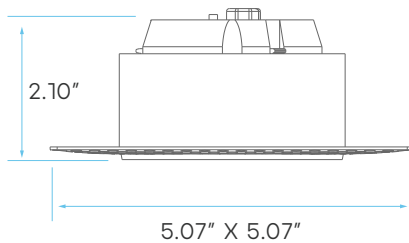


3" TRIMLESS - FLOATING GIMBAL
CUTOUT: Ø 3.38"

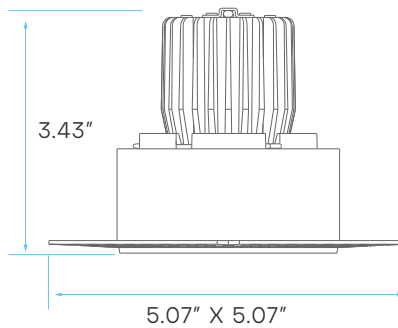


3" TRIMLESS - GIMBAL
CUTOUT: Ø 3.38"

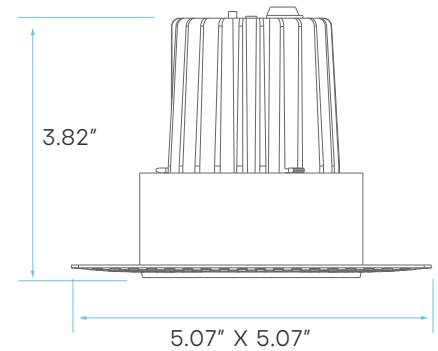


3" TRIMLESS - FLAT
CUTOUT: Ø 3.38"

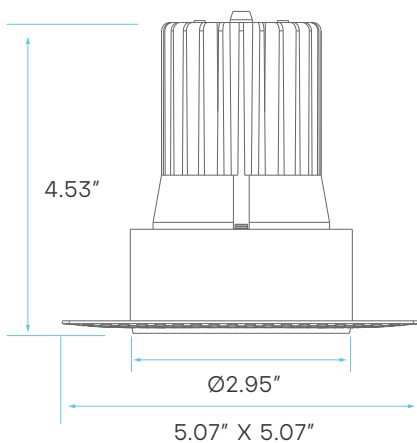

3" TRIMLESS - ZOOMABLE
CUTOUT: Ø 3.38"

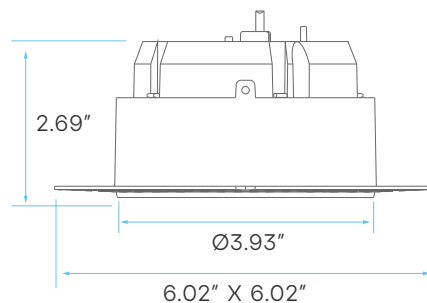

4" TRIMLESS - FLOATING GIMBAL
CUTOUT: Ø 4.25"

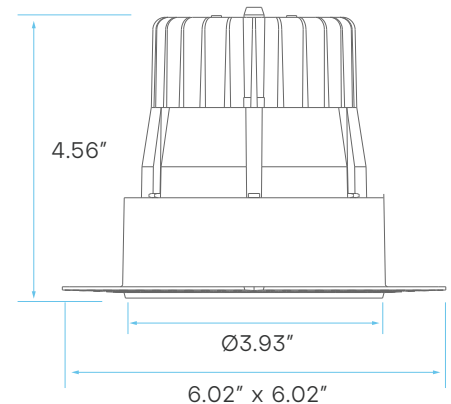

4" TRIMLESS
CUTOUT: Ø 4.25"