


LED RETROFIT TUBE T8 UNIVERSAL GLASS - 3 WAY INSTALLATION 48"

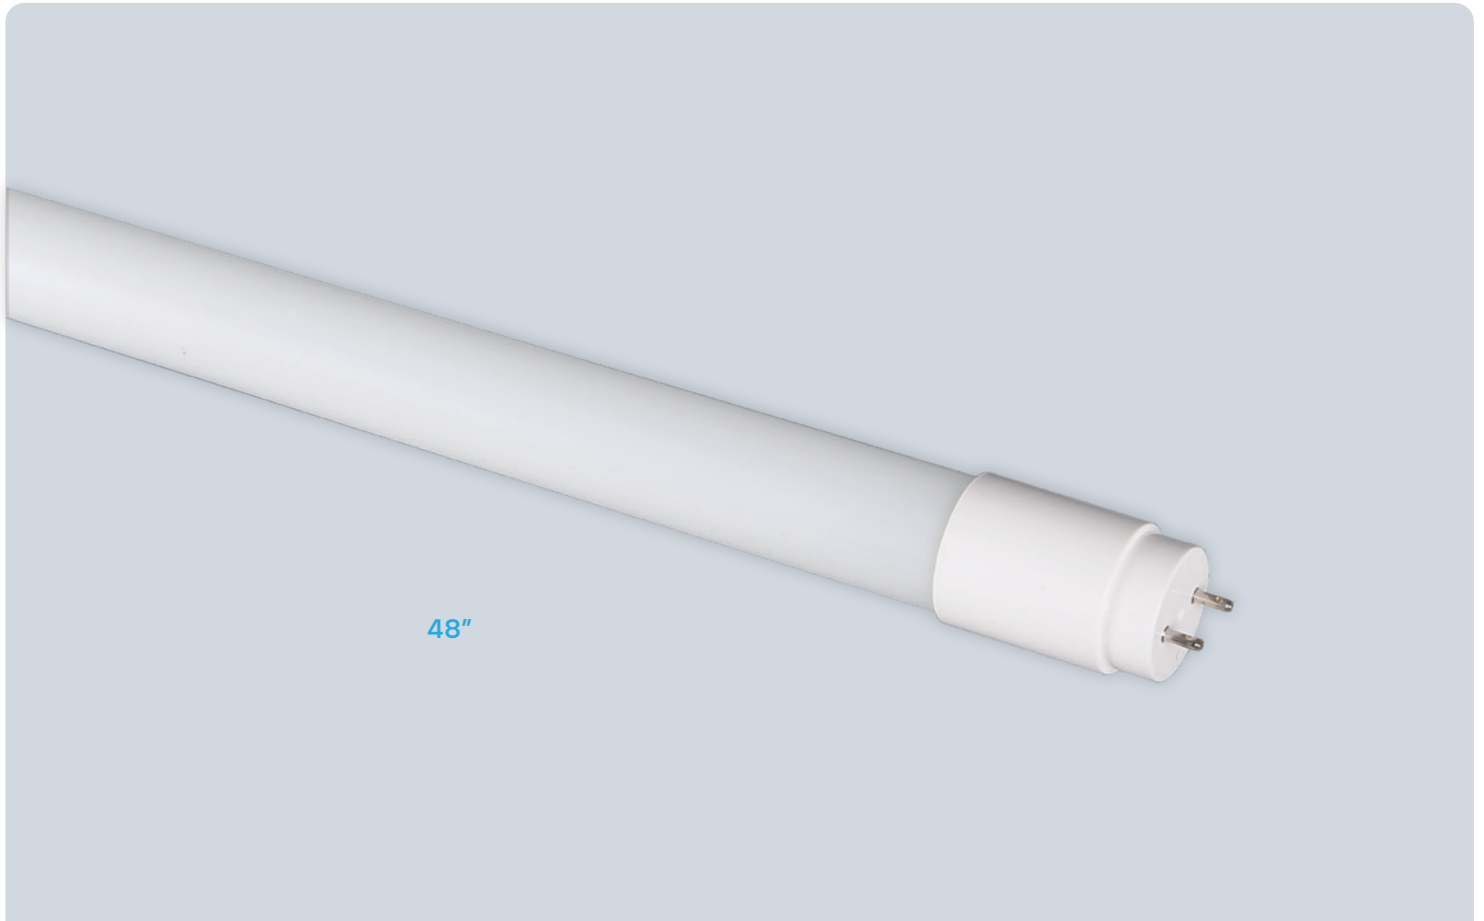

CRI
83

DIMMABLE

0-10V



DIRECT
REPLACEMENT



BYPASS
BALLAST



BYPASS
BALLAST




SHATTER
PROOF



DAMP
LOCATION
RATED



5
YEAR
WARRANTY

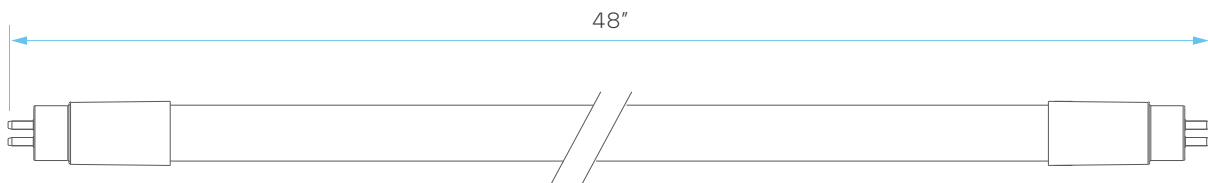

ELECTRICAL

MODEL	DESCRIPTION	POWER	POWER W/ BALLAST	INPUT VOLTS	DIMMABLE	EFFICACY	LIFETIME	COST/YR
LR34190	LED13T8/30K/48/SG/UNV3	13	15.5	120-277V OR BALLAST	DIMMING: 0-10V	119	50,000	\$ 1.57
LR34191	LED13T8/35K/48/SG/UNV3	13	15.5	120-277V OR BALLAST	DIMMING: 0-10V	123	50,000	\$ 1.57
LR34192	LED13T8/40K/48/SG/UNV3	13	15.5	120-277V OR BALLAST	DIMMING: 0-10V	126	50,000	\$ 1.57
LR34193	LED13T8/50K/48/SG/UNV3	13	15.5	120-277V OR BALLAST	DIMMING: 0-10V	126	50,000	\$ 1.57
LR34194	LED13T8/65K/48/SG/UNV3	13	15.5	120-277V OR BALLAST	DIMMING: 0-10V	126	50,000	\$ 1.57

*DIMMABLE AS TYPE A WITH SELECT DIMMING FLUORESCENT BALLASTS.

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	BASE	FLOOD	CRI	UL	DLC
LR34190	LED13T8/30K/48/SG/UNV3	3000K	SOFT WHITE	1850	G13	240°	83	YES	YES
LR34191	LED13T8/35K/48/SG/UNV3	3500K	NATURAL	1900	G13	240°	83	YES	YES
LR34192	LED13T8/40K/48/SG/UNV3	4000K	COOL WHITE	1950	G13	240°	83	YES	YES
LR34193	LED13T8/50K/48/SG/UNV3	5000K	BRIGHT WHITE	1950	G13	240°	83	YES	YES
LR34194	LED13T8/65K/48/SG/UNV3	6500K	DAYLIGHT	1950	G13	240°	83	YES	NO