

## LED UP/DOWN UNIVERSAL CYLINDER WALL SCNCE - 3 CCT & WATTAGE SELECTABLE LR40336


### CAUTION

IN ORDER TO PREVENT POSSIBLE SHOCK, TURN OFF THE MAIN POWER AT THE CIRCUIT BREAKER BEFORE INSTALLING THE LIGHT FIXTURE.

### WARNING


ALL ELECTRICAL CONNECTIONS MUST BE IN ACCORDANCE WITH LOCAL AND NATIONAL ELECTRICAL CODE (N.E.C.) STANDARDS. IF YOU ARE UNFAMILIAR WITH PROPER ELECTRICAL WIRING CONNECTIONS HIRE A QUALIFIED ELECTRICIAN. REMOVE THE FIXTURE AND THE MOUNTING PACKAGE FROM THE BOX AND MAKE SURE THAT NO PARTS ARE MISSING BY REFERENCING THE ILLUSTRATIONS ON THE INSTALLATION INSTRUCTIONS.

### BOX CONTENTS

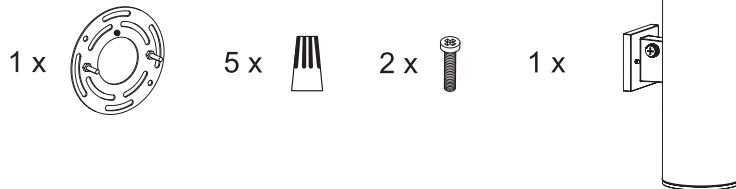

### TOOLS NEEDED

(NOT INCLUDED)



Phillips screwdriver

### INSTRUCTIONS

**1**

**2**

**3**

**4**

**5**

**6**

**7**

**8**

ONCE INSTALLED, USE WATERPROOF SILICONE (NOT INCLUDED) TO SEAL BETWEEN THE EDGES AND THE FIXTURE.

|   |   |       |   |   |       |   |           |
|---|---|-------|---|---|-------|---|-----------|
| 1 | 2 | CCT   | 3 | 4 | POWER | 5 | PHOTOCELL |
| ↑ | ↑ | OFF   | ↑ | ↑ | 18 W  | ↑ | ON        |
| ↑ | ↑ | 3000K | ↑ | ↑ | 15 W  | ↑ | OFF       |
| ↑ | ↑ | 4000K | ↑ | ↑ | 12 W  |   |           |
| ↑ | ↑ | 5000K | ↑ | ↑ | 6 W   |   |           |

|       |                 |
|-------|-----------------|
| SLIDE | LIGHT DIRECTION |
| →     | UP LIGHT        |
| ←     | UP-DOWN LIGHT   |