

LED ADJUSTABLE GARAGE LIGHT LR42350

IMPORTANT SAFETY INFORMATION

READ ALL INSTRUCTIONS BEFORE INSTALLATION. THIS LIGHT OPERATES ON A REGULAR HOUSEHOLD POWER (120V, 60Hz)


TURN OFF POWER AT SWITCH BEFORE STARTING INSTALLATION OF THIS LIGHT

WARNING

- DO NOT use when the enclosure is damaged or broken in any way.
- DO NOT alter, relocate or remove wiring, lamp base power supply or any other electrical component.
- This device is not intended to be used with any emergency light fixtures.
- Operating temperature ranging between -40°C to 45°C (-40°F to 113°F). Lamp life may be affected outside these temperatures.
- Added weight of the device may cause instability of a free-standing portable luminaire.
- Use only in free-standing portable luminaires in which the distance from the bottom of the base to the top of the lampholder does not exceed three (3) times the minimum base diameter.

INSTALLATION INSTRUCTIONS

1. SCREW LIGHT INTO SOCKET
2. PIVOT HEADS TO DESIRED ANGLE
3. REMOVE LABEL AND ENSURE THE POWER SWITCH IS TURNED TO THE ON POSITION (I).
4. RESTORE POWER AT THE SWITCH AND ENJOY YOUR NEW LED LIGHT.

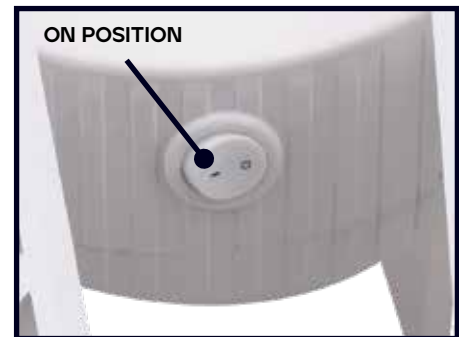

NOTE: THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION. THIS LIGHTING EQUIPMENT COMPLIES WITH CAN ICES-005 (B)