

2.5" CYLINDER - H TRACK ADAPTER LR43747, LR43748

IMPORTANT: READ ALL INSTRUCTIONS BEFORE INSTALLING FIXTURES. KEEP FOR FUTURE REFERENCE.


SAFETY: FOR YOUR SAFETY, THIS FIXTURE MUST BE WIRED IN ACCORDANCE TO LOCAL ELECTRICAL CODES AND ORDINANCES. ALL WORK SHOULD BE DONE BY A QUALIFIED ELECTRICIAN.

WARNING: MAKE SURE POWER IS OFF FROM THE ELECTRICAL PANEL BEFORE STARTING INSTALLATION OR ATTEMPTING ANY MAINTENANCE. INDOOR INSTALLATION ONLY.

TOOLS REQUIRED: SAW, MEASURING TAPE, ELECTRICAL WIRING (USE TAPE AND GAUGE SUITABLE FOR APPLICATION TO CONNECT THE FIXTURES).

INSTRUCTIONS

1. SELECT THE DESIRED LED COLOR TEMPERATURE USING THE SWITCH INSIDE THE CYLINDER. (8b)
 2. CONNECT THE QUICK CONNECTORS BETWEEN CYLINDER MODULE AND MOUNTING KIT WIRES. (8c)
 3. ASSEMBLE THE LUMINAIRE BY SCREWING THE TWO PARTS (8d).
 4. INSERT THE BRASS CONTACTS ON THE TOP OF TRACK ADAPTER INTO THE TRACK CHANNEL (8e).
 5. ROTATE THE TRACK ADAPTER 90° (8f) SO THAT THE INDICATOR ARROW POINTS TOWARD THE POLARITY GROOVE ONCE INSTALLED (8g).
- NOTE: BE CAREFUL NOT TO TOUCH THE TRACK BAR INSIDE THE TRACK WITH BARE HANDS.
6. ADJUST THE LUMINAIRE INTO DESIRED POSITION (8h)
 7. TURN POWER BACK ON

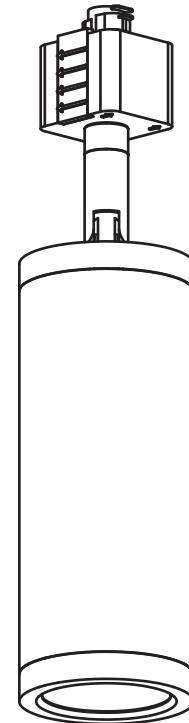

INSTRUCTIONS

