


## TAPERITE™ TAPE LIGHT

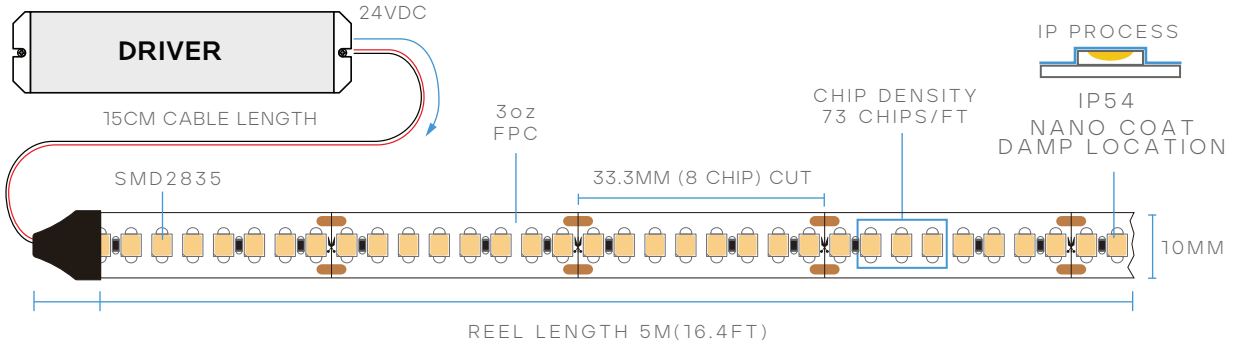

## LR44600

7W/FT
115W/REEL
IP-54
HIGH DENSITY
HIGH EFFICACY
CRI 80
BEAM SPREAD 120°
24V
10 MM
3oz FPC
16.4' REEL
UL LISTED

MODEL	DESCRIPTION	COLOR (CCT)	LUMEN/FT	WATTAGE /FT	WATTAGE /REEL	EFFICACY
LR44600	LEDTL/2835/HD240/23/27K/IP54/24V/HE/5M	2700K - WARM WHITE	982	7W	115W	140lm/w

CHIP		INSTALLATION		PACKAGING	
CHIP:	SMD2835	ADHESIVE:	9448A 3M TAPE	CASE:	50 ROLLS
CHIP GROUP:	8	CABLE LENGTH:	15CM		
CUT SIZE:	33.3MM	MAX. RUN:	5M/16.4FT		
WIDTH:	10MM				
CHIP WATT:	1W				
CHIP QTY:	73/FT				

### COMPATIBLE CONNECTORS




TAPE TO TAPE

- LR44705 STANDARD
- LR44800 HEAVY DUTY 10A




TAPE TO TAPE CORNER

- LR44803 HEAVY DUTY 10A



TAPE TO CABLE

- LR44707 STANDARD
- LR44805 HEAVY DUTY 10A



TAPE TO CABLE TO TAPE

- LR44709 STANDARD
- LR44807 HEAVY DUTY 10A

### COMPATIBLE CHANNELS \*ALUMINUM CHANNEL REQUIRED FOR HEAT DISSIPATION

