
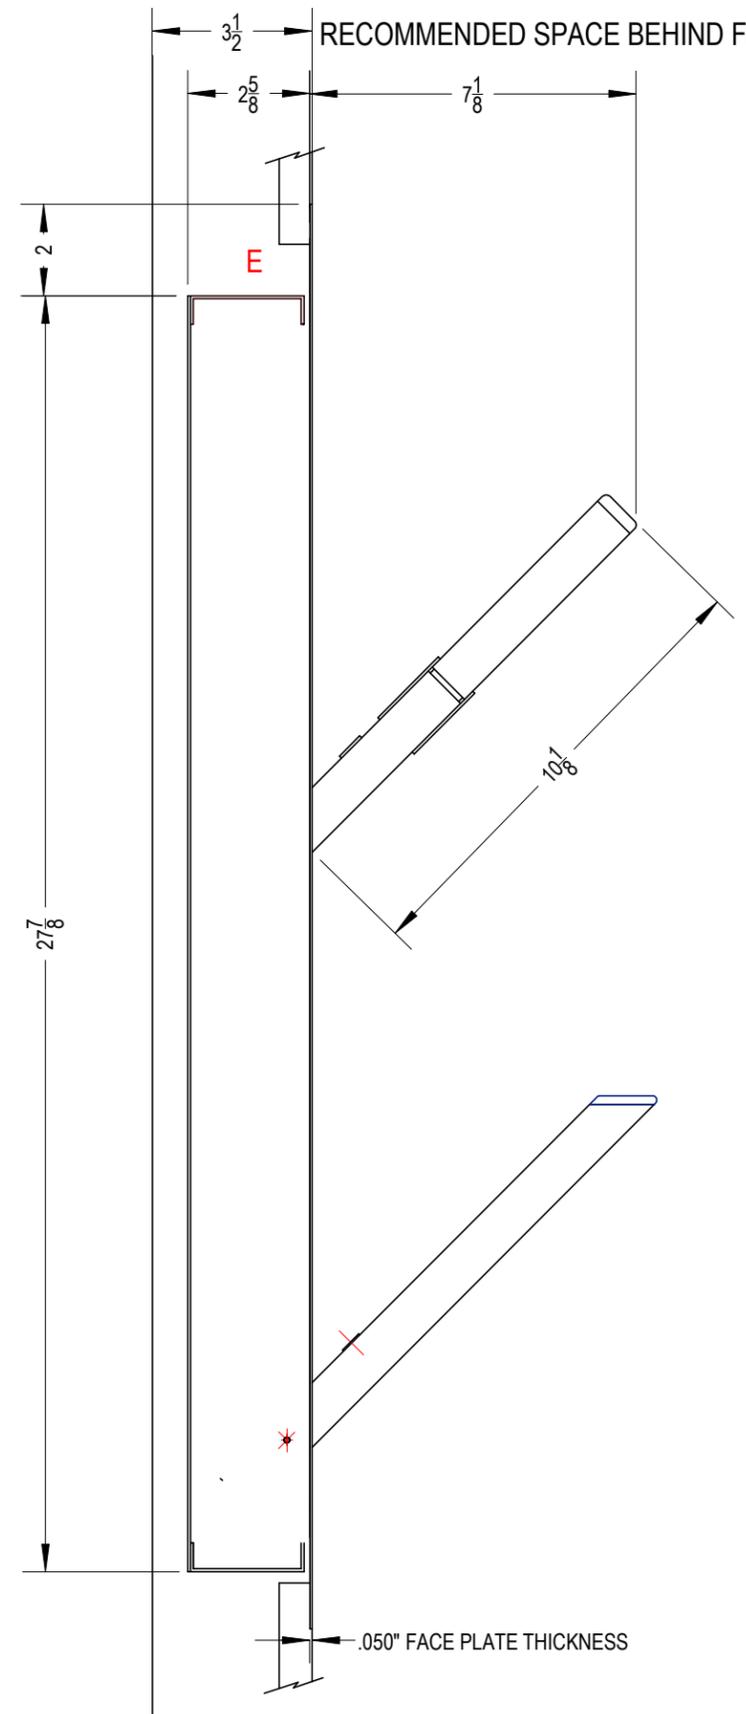


4

3

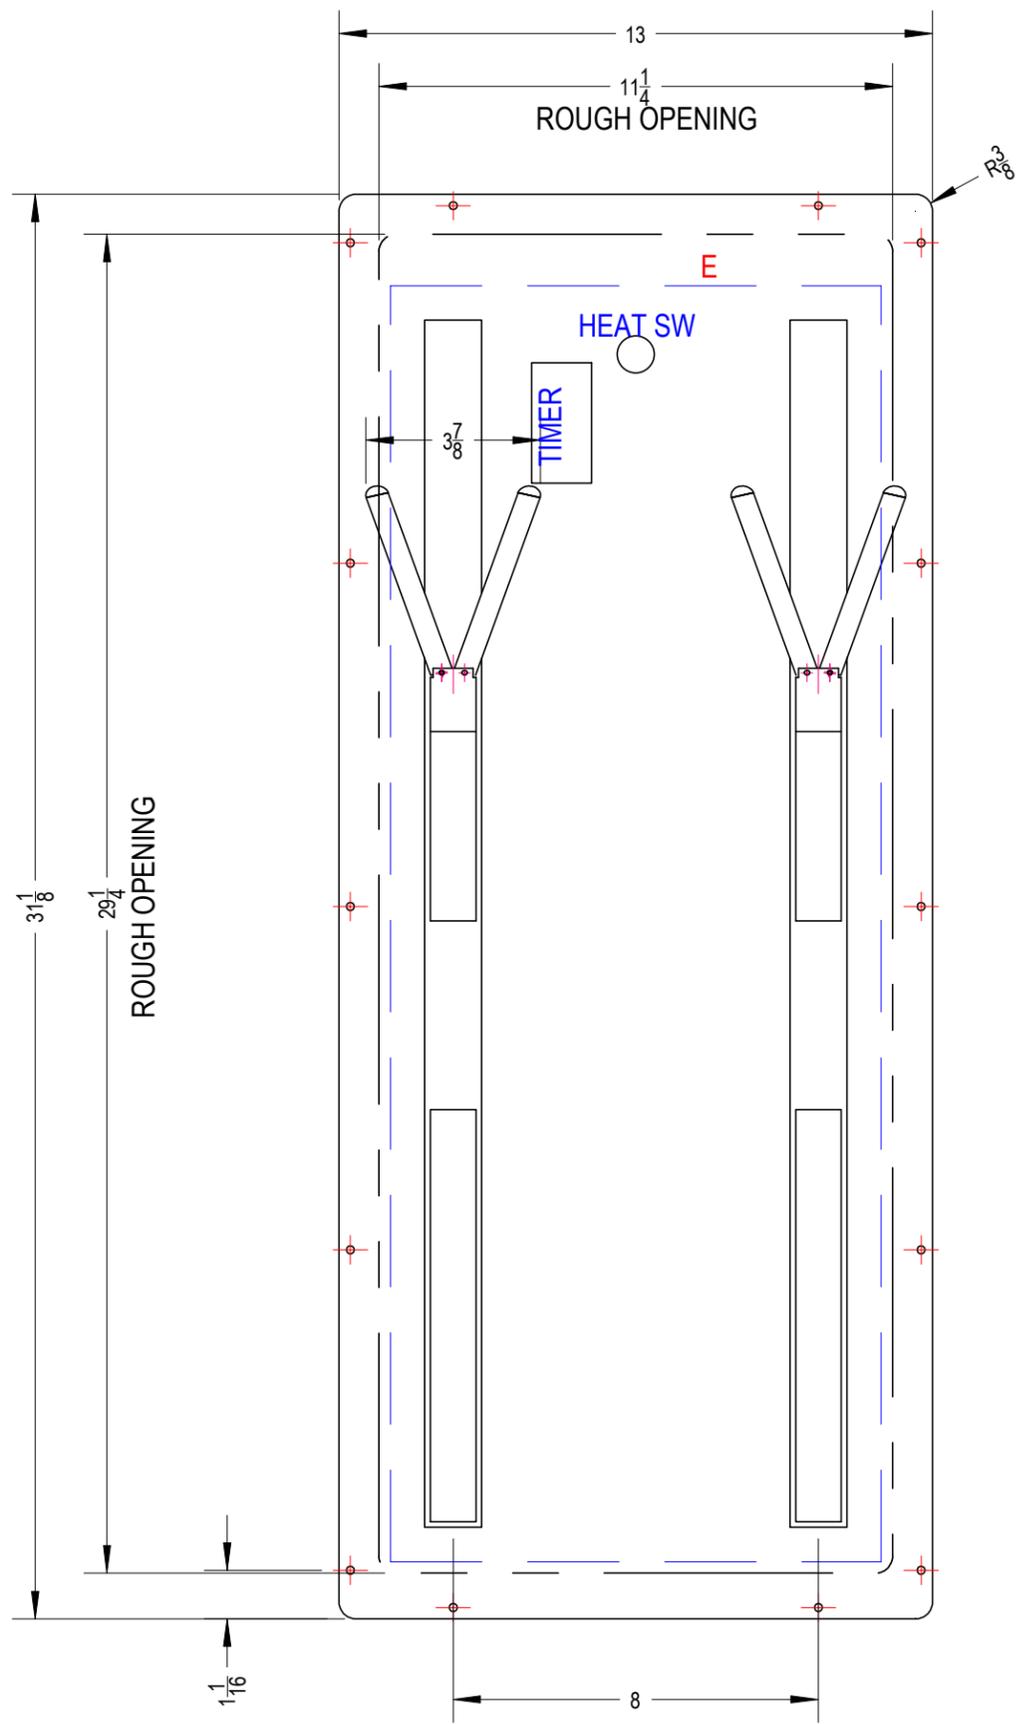

POWER REQUIREMENTS:  
 120V AC  
 300 Watts

ELECTRICAL CONNECTION IS  
 NEAR CENTER OF BOX AT BACK  
 MARKED "E"

ROUGH OPENING WITH SUPPORTING  
 WOOD SUCH AS 1/2" PLYWOOD ON ALL SIDES:  
 11 1/4" W x 29 1/4" H

ATTACHES WITH 14 SUPPLIED SCREWS  
 PAINTED TO MATCH

AIR INTAKE IS IN REAR  
 DESIGN MUST INCLUDE AIR PASSAGE  
 BEHIND DRYER FROM FRESH AIR LOCATION  
 SEE DWG 75412 FOR VENT COVER SCREEN

VERTICAL POSITION IN CABINET BY CUSTOMER

RECOMMENDED MINIMUM SPACE IN FRONT OF DRYER  
 FACE: 14" ( MIN DEPTH OF LOCKER )

PROJECT		
PUELCHÉ DRYER F2 N		
TITLE		
ASSY		
DWG NO	75400	REV
SCALE	1/4	2
JAN 2024	SHEET	

4

3

2

1