

4

3



# PUELICHE DRYER FL4

POWER REQUIREMENTS:  
120V AC  
500 Watts

ELECTRICAL CONNECTION IS  
NEAR CENTER OF BOX AT BACK  
MARKED "E"

ROUGH OPENING WITH SUPPORTING  
WOOD SUCH AS 1/2" OR 3/4" PLYWOOD ON ALL SIDES:

FLANGE DIMS: 11 1/4" W x 57 1/8" H (3/8 R CORNERS)

ROUGH OPENING:

ATTACHES WITH SUPPLIED SCREWS  
PAINTED TO MATCH  
INTO 1/16 RECESS 13 X 57 1/8 WITH 3/8 R CORNERS



AIR INTAKE IN REAR FROM VENTED CABINET SPACE  
SEE DWG 76412 FOR VENT COVER SCREEN

RECOMMENDED AIR SPACE BEHIND DRYER FACE: 3 7/16"

RECOMMENDED MINIMUM SPACE FOR BOOTS  
IN FRONT OF FACE: 15"

VERTICAL POSITION IN CABINET BY CUSTOMER

CONFIRM THIS DIMENSION  
AS DESIGN HAS CHANGED

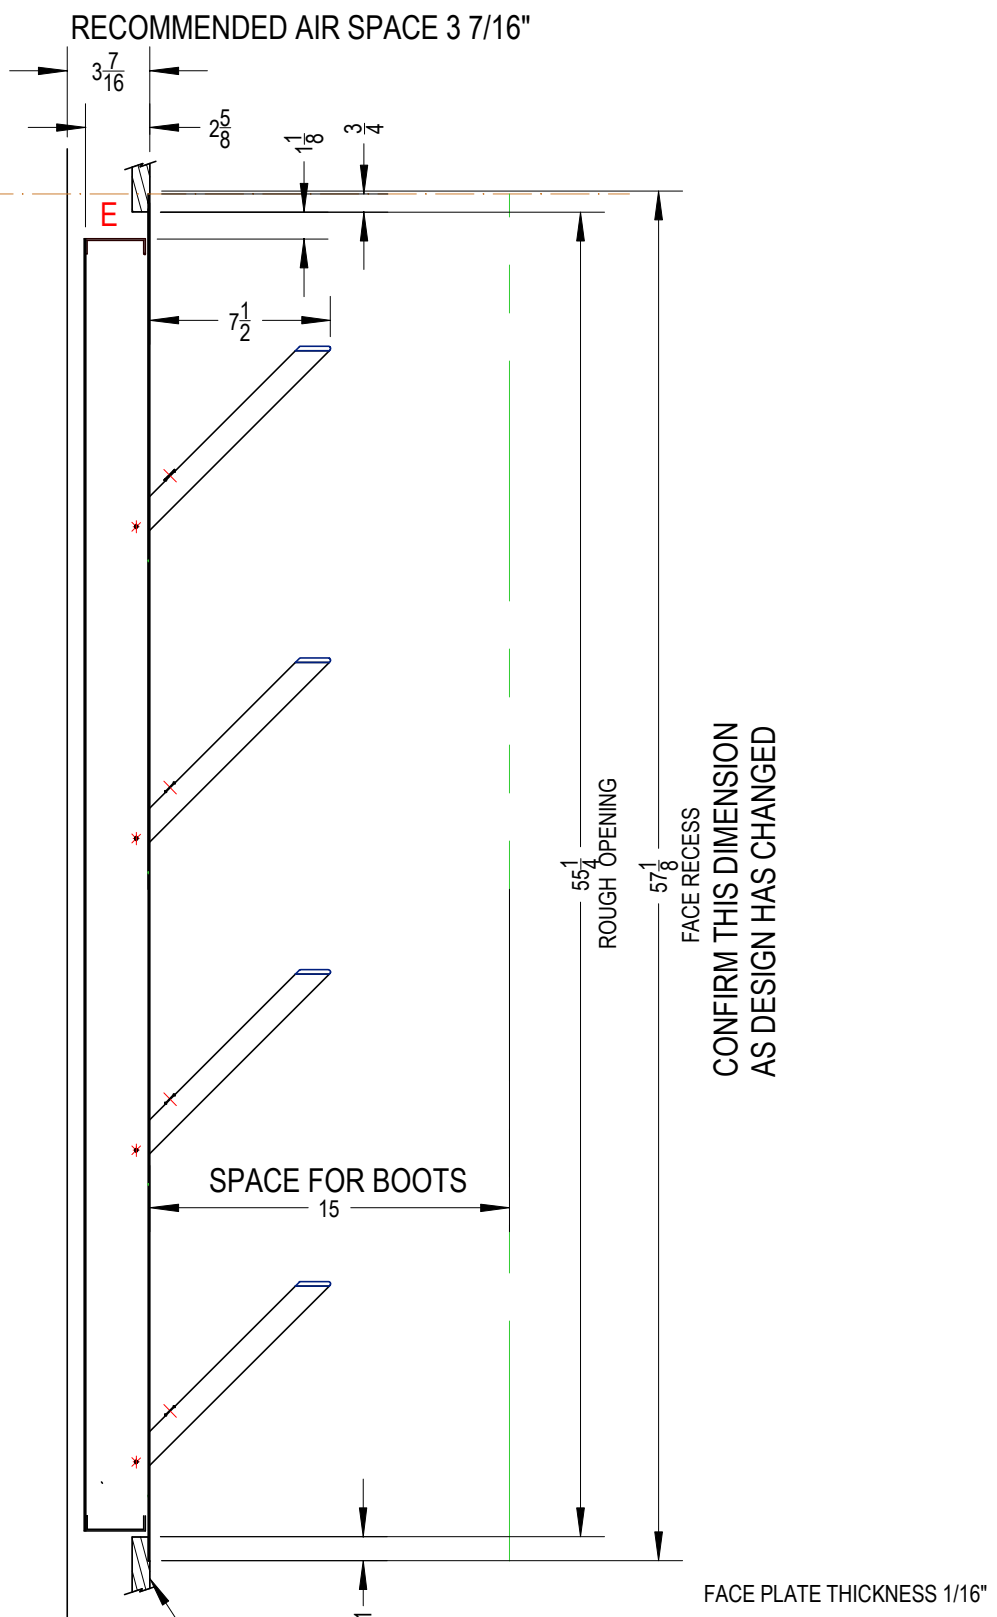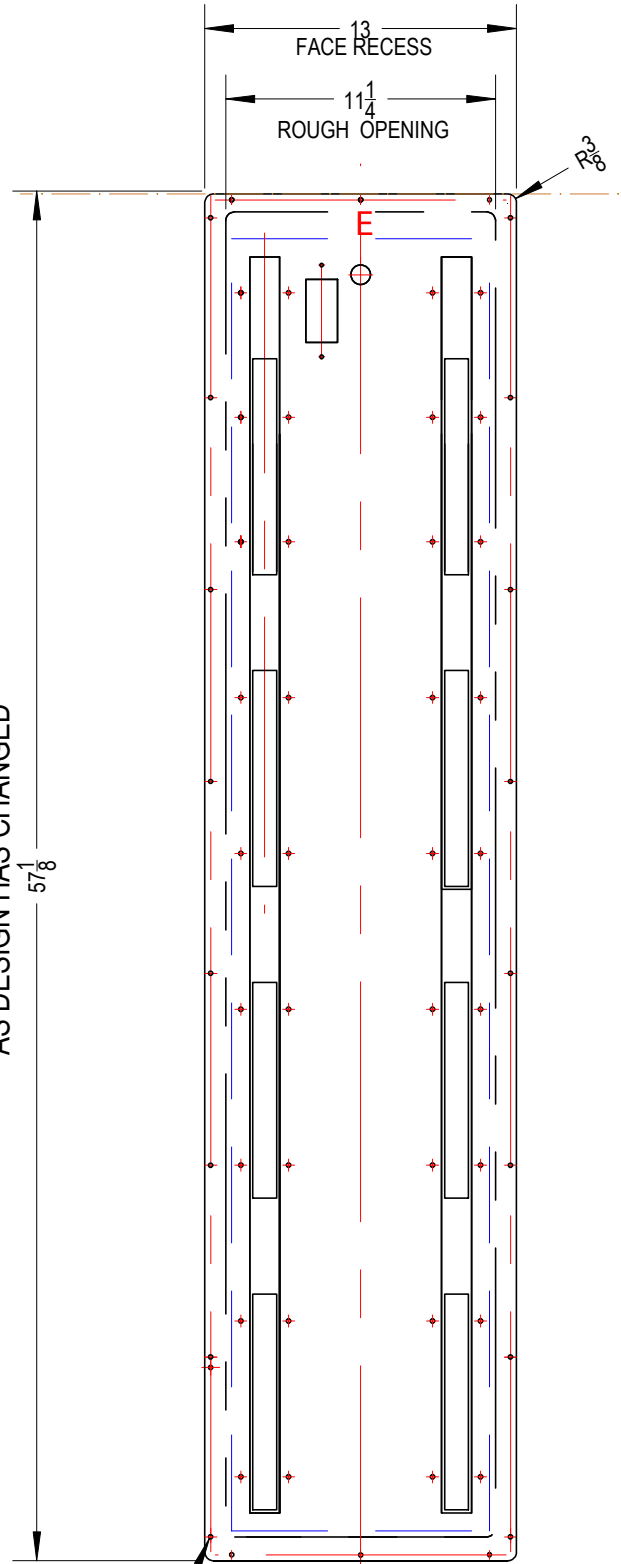

CONFIRM THIS DIMENSION  
AS DESIGN HAS CHANGED

PROJECT PUELICHE DRYER FL4		
TITLE <b>ASSY</b>		
DWG NO	76400	REV 3
SCALE	1/4	SEPT 2023 SHEET

4

3



2

1