
PRODUCT DETAILS

WALLCOVERING PANELS

DREAMHOUSE			
ELMER			
DH02			
COMMERCIAL TYPE II VINYL RESIDENTIAL AVAILABLE			
9'H / 12'H / 15'H			
LONGER AVAILABLE			
52"W X 55"H			
54"			
UNTRIMMED			
STRAIGHT MATCH			
½" BLEED + ½" SELVAGE			
DIGITAL PRINT			
REFER TO SAMPLE FOR ACCURATE COLOR.			
PRINT TO ORDER. SLIGHT COLOR VARIATIONS BETWEEN PRINT RUNS.			

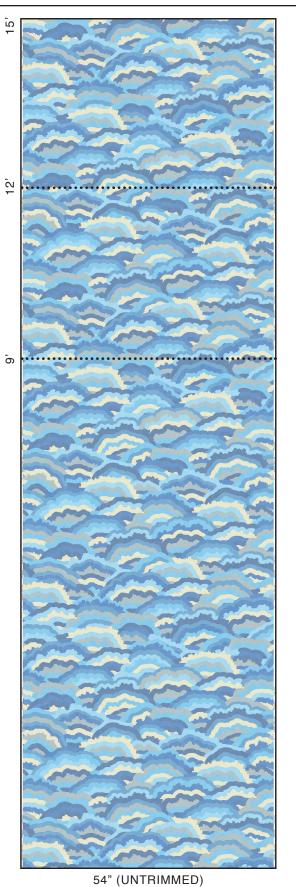

TYPE II VINYL SUBSTRATE SPECS.

COMMERCIAL

GENERAL	LAST UPDATED: 11/28/2018	
DESCRIPTION	COMMERCIAL GRADE, WIDE-FORMAT WALLCOVERING MEDIA	
CONSTRUCTION	2-PLY EMBOSSED VINYL FACE/LAMINATED FABRIC BACKING	
MATERIAL WIDTH		54"
WEIGHT	TOTAL: POLYESTER/VINYL WEIGHT: FABRIC WEIGHT: ADHESIVE:	20 OZ / LINEAL YARD 17 OZ / LINEAL YARD 2.7 OZ / LINEAL YARD 0.3 OZ / LINEAL YARD
THICKNESS		0.017 TO 0.027 IN
APPLICATION	STANDARD COMMERCIAL WALLC	OVERING PASTES, PRIMERS AND TECHNIQUES
	FOR INDOOR USE IN ENVIE	RONMENTALLY CONTROLLED SPACES

TESTS / CERTIFICATIONS / QUALITIES			
FEDERAL SPECIFICATION	CCC-408-D TYPE II CLASS A		
WA SPECIFICATION	W-101 TYPE II, NSF/ANSI 342 SUSTAINABILITY STANDARD		
	MEETS OR EXCEEDS REQUIREMENTS FOR FLAME SPREAD, SMOKE DEVELOPED AND FLASHOVER		
FIRE TEST RATING	ASTM-E84 TUNNEL TEST CLASS A NFPA LIFE SAFETY CODE 101 CLASS A EU CLASS FLAME (EN 15102) BS476 PARTS 6 AND 7 PASSED ALL REQUIREMENTS CAN/ULC S102 PASSED ALL REQUIREMENTS		
MOLD/MILDEW RESISTANCE	ASTM-G21 SPECIFICATIONS, PASSED ALL REQUIREMENTS		
INDOOR AIR QUALITY	MANUFACTURED WITH LOW VOC VINYL CALIFORNIA CDPH STANDARD FOR SCHOOLS + OFFICES TESTED PER CA-1350 WA CERTIFIED NSF/ANSI 342 SUSTAINABILITY STANDARD		
ADDITIONAL NOTES	MANUFACTURED WITHOUT THE USE OF BROMINATED FLAME RETARDANTS		
	MEETS OR EXCEEDS EU TOXICITY STANDARD EN12149 A, B, C FOR HEAVY METALS AND FORMALDEHYDE		
	NON-WOVEN BACKING CONTAINS 50% POST-CONSUMER RECYCLED CONTENT.		
	NSF-342 CERTIFIED FOR SILVER COMPLIANCE FOR 20OZ WALLCOVERING CONSTRUCTIONS		