


PRODUCT DETAILS

WALLCOVERING PANELS

| | |
|---|--|
| PATTERN: | GEODE |
| COLORWAY: | SELENITE |
| ITEM #: | GD01 |
| SUBSTRATE: | COMMERCIAL TYPE II MYLAR/VINYL |
| PANEL LENGTHS: | 9'H / 12'H / 15'H <i>LONGER AVAILABLE</i> |
| REPEAT: | 52"W X 39"H |
| MATERIAL WIDTH: | 54" <i>UNTRIMMED</i> |
| LEAD TIME: | 6-8 WEEKS TO SHIP |
| STRAIGHT MATCH | |
| ½" BLEED + ½" SELVAGE | |
| DIGITAL PRINT | |
| REFER TO SAMPLE FOR ACCURATE COLOR. | |
| PRINT TO ORDER. SLIGHT COLOR VARIATIONS BETWEEN PRINT RUNS. | |

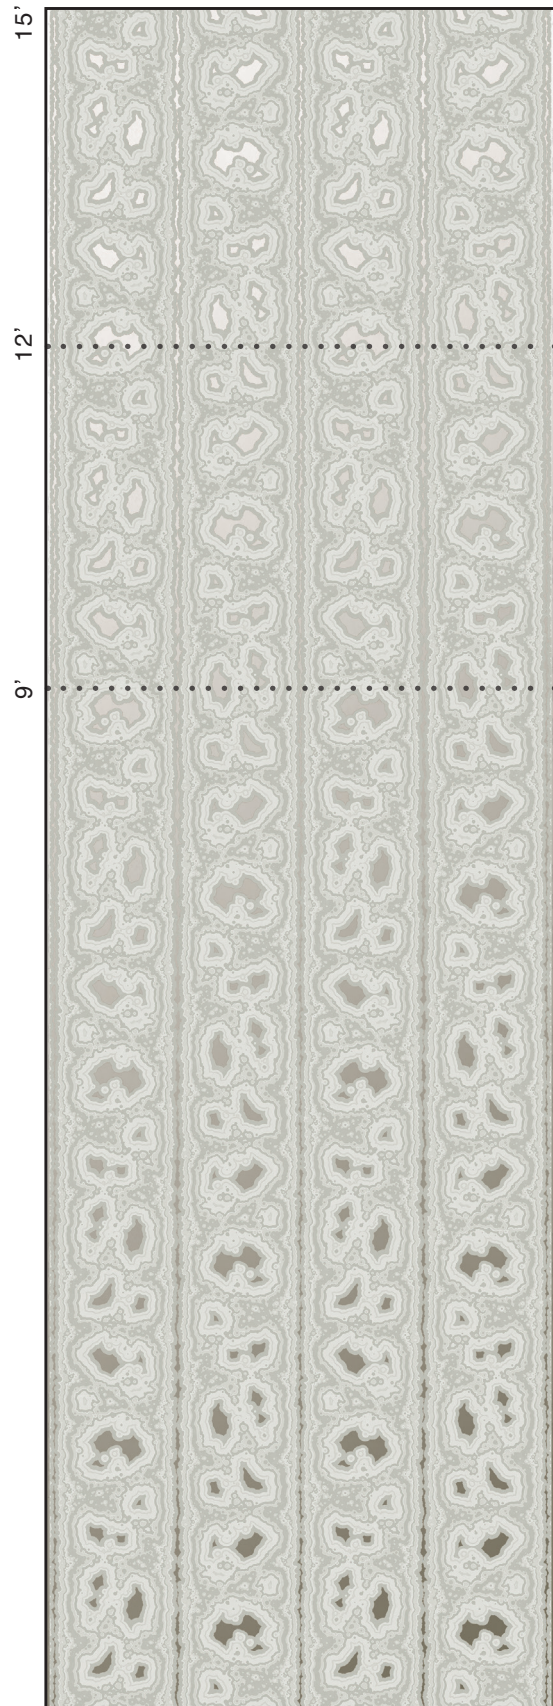

54" (UNTRIMMED)

TYPE II MYLAR/VINYL SUBSTRATE SPECS.

COMMERCIAL

| | | |
|----------------|--|--|
| GENERAL | | LAST UPDATED: 11/28/2018 |
| DESCRIPTION | COMMERCIAL GRADE, WIDE-FORMAT WALLCOVERING MEDIA | |
| CONSTRUCTION | MULTI-PLY VINYL/MYLAR CONSTRUCTION WITH NON-WOVEN BACKING | |
| MATERIAL WIDTH | 54" | |
| WEIGHT | TOTAL: POLYESTER/VINYL WEIGHT: FABRIC WEIGHT: ADHESIVE: | 20 OZ / LINEAL YARD 16.8 OZ / LINEAL YARD 2.7 OZ / LINEAL YARD 0.5 OZ / LINEAL YARD |
| THICKNESS | 17 MIL. | |
| APPLICATION | STANDARD COMMERCIAL WALLCOVERING PASTES, PRIMERS AND TECHNIQUES FOR INDOOR USE IN ENVIRONMENTALLY CONTROLLED SPACES | |

| | | |
|------------------------------------|--|---|
| TESTS / CERTIFICATIONS / QUALITIES | | |
| FEDERAL SPECIFICATION | CCC-408-D TYPE II CLASS A | |
| WA SPECIFICATION | W-101 TYPE II | |
| FIRE TEST RATING | MEETS OR EXCEEDS REQUIREMENTS FOR FLAME SPREAD, SMOKE DEVELOPED AND FLASHOVER. ASTM-E84 TUNNEL TEST NFPA LIFE SAFETY CODE 101 EU CLASS FLAME (EN 15102) CAN/ULC S102 | CLASS A CLASS A PASSED CLASS B, S2 PASSED ALL REQUIREMENTS |
| MOLD/MILDEW RESISTANCE | ASTM-G21 SPECIFICATIONS, PASSED ALL REQUIREMENTS | |
| INDOOR AIR QUALITY | MANUFACTURED WITH LOW VOC VINYL CALIFORNIA CDPH STANDARD FOR SCHOOLS + OFFICES TESTED PER CA-1350 WA CERTIFIED NSF/ANSI 342 SUSTAINABILITY STANDARD | |
| ADDITIONAL NOTES | MANUFACTURED WITHOUT THE USE OF BROMINATED FLAME RETARDANTS MEETS OR EXCEEDS EU TOXICITY STANDARD EN12149 A, B, C FOR HEAVY METALS AND FORMALDEHYDE NON-WOVEN BACKING CONTAINS 50% POST-CONSUMER RECYCLED CONTENT | |