
## PRODUCT DETAILS

WALLCOVERING PANELS

PATTERN:	GEODE		
COLORWAY:	JADE		
ITEM #:	GD02		
SUBSTRATE:	COMMERCIAL TYPE II MYLAR/VINYL		
PANEL	9'H / 12'H / 15'H		
LENGTHS:	LONGER AVAILABLE		
REPEAT:	52"W X 39"H		
MATERIAL	54"		
WIDTH:	UNTRIMMED		
LEAD TIME:	6-8 WEEKS TO SHIP		
STRAIGHT MATCH			
½" BLEED + ½" SELVAGE			
DIGITAL PRINT			
REFER TO SAMPLE FOR ACCURATE COLOR.			
PRINT TO ORDER. SLIGHT COLOR			
VARIATIONS BETWEEN PRINT RUNS.			

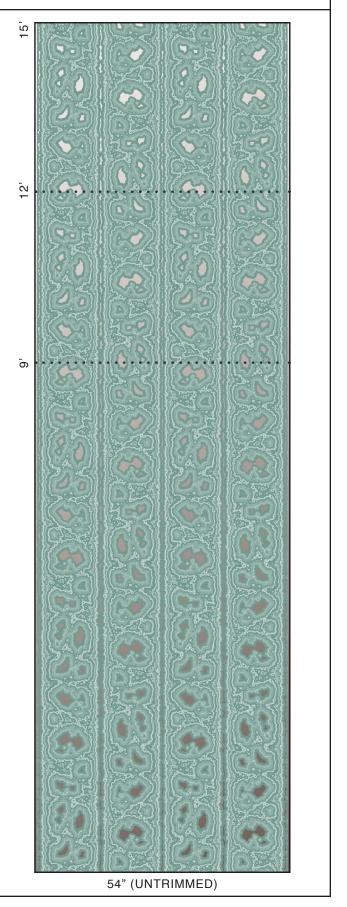

## TYPE II MYLAR/VINYL SUBSTRATE SPECS.

COMMERCIAL

GENERAL	LAST UPDATED: 11/28/2018		
DESCRIPTION	COMMERCIAL GRADE, WIDE-FORMAT WALLCOVERING MEDIA		
CONSTRUCTION	MULTI-PLY VINYL/MYLAR CONSTRUCTION WITH NON-WOVEN BACKING		
MATERIAL WIDTH		54"	
WEIGHT	TOTAL: POLYESTER/VINYL WEIGHT: FABRIC WEIGHT: ADHESIVE:	20 OZ / LINEAL YARD 16.8 OZ / LINEAL YARD 2.7 OZ / LINEAL YARD 0.5 OZ / LINEAL YARD	
THICKNESS		17 MIL.	
APPLICATION	STANDARD COMMERCIAL WALLCOVERING PASTES, PRIMERS AND TECHNIQUES		
	FOR INDOOR USE IN ENVIRONMENTALLY CONTROLLED SPACES		

TESTS / CERTIFICATIONS / QUALITIES				
FEDERAL SPECIFICATION	CCC-408-D TYPE II CLASS A			
WA SPECIFICATION	W-101 TYPE II			
	MEETS OR EXCEEDS REQUIREMENTS FOR FLAME SPREAD, SMOKE DEVELOPED AND FLASHOVER.			
FIRE TEST RATING	ASTM-E84 TUNNEL TEST NFPA LIFE SAFETY CODE 101 EU CLASS FLAME (EN 15102) CAN/ULC S102	CLASS A CLASS A PASSED CLASS B, S2 PASSED ALL REQUIREMENTS		
MOLD/MILDEW RESISTANCE	ASTM-G21 SPECIFICATIONS, PASSED ALL REQUIREMENTS			
INDOOR AIR QUALITY	MANUFACTURED WITH LOW VOC VINYL CALIFORNIA CDPH STANDARD FOR SCHOOLS + OFFICES TESTED PER CA-1350 WA CERTIFIED NSF/ANSI 342 SUSTAINABILITY STANDARD			
		ACTURED WITHOUT THE USE OF OMINATED FLAME RETARDANTS		
ADDITIONAL NOTES		U TOXICITY STANDARD EN12149 Y METALS AND FORMALDEHYDE		
		VOVEN BACKING CONTAINS 50% ONSUMER RECYCLED CONTENT		