


# PRODUCT DETAILS

## WALLCOVERING PANELS

|   |  |
|---|--|
| PATTERN:  | GEODE  |
| COLORWAY:   | SUNSTONE                                     |
| ITEM #:   | GD03   |
| SUBSTRATE:  | COMMERCIAL<br>TYPE II MYLAR/VINYL            |
| PANEL LENGTHS:  | 9'H / 12'H / 15'H<br><i>LONGER AVAILABLE</i> |
| REPEAT:   | 52"W X 39"H                                  |
| MATERIAL WIDTH:   | 54"<br><i>UNTRIMMED</i>                      |
| LEAD TIME:  | 6-8 WEEKS TO SHIP                            |
| STRAIGHT MATCH  |  |
| ½" BLEED + ½" SELVAGE                                       |  |
| DIGITAL PRINT   |  |
| REFER TO SAMPLE FOR ACCURATE COLOR.                         |  |
| PRINT TO ORDER. SLIGHT COLOR VARIATIONS BETWEEN PRINT RUNS. |  |

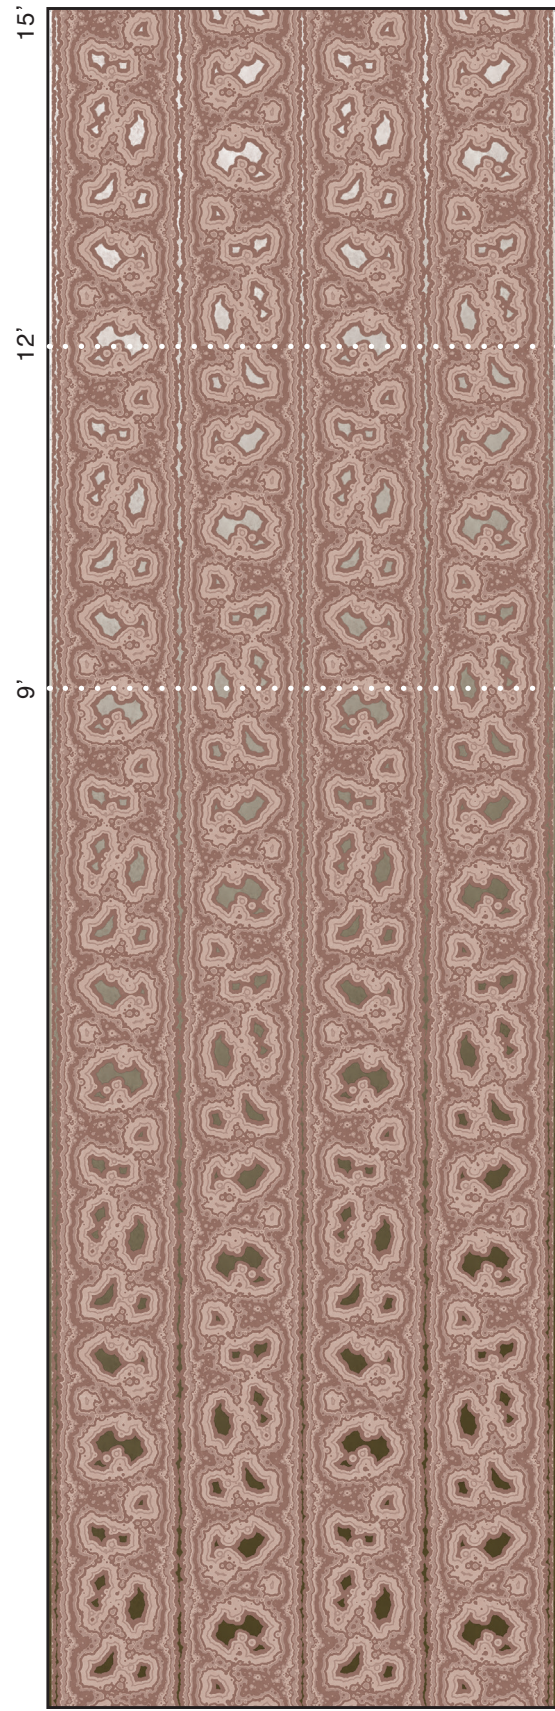

54" (UNTRIMMED)

# TYPE II MYLAR/VINYL SUBSTRATE SPECS.

COMMERCIAL

|                |  |  |
|----------------|--|--|
| GENERAL        |  | LAST UPDATED: 11/28/2018   |
| DESCRIPTION    | COMMERCIAL GRADE, WIDE-FORMAT WALLCOVERING MEDIA   |  |
| CONSTRUCTION   | MULTI-PLY VINYL/MYLAR CONSTRUCTION WITH NON-WOVEN BACKING  |  |
| MATERIAL WIDTH | 54"  |  |
| WEIGHT         | TOTAL:<br>POLYESTER/VINYL WEIGHT:<br>FABRIC WEIGHT:<br>ADHESIVE:   | 20 OZ / LINEAL YARD<br>16.8 OZ / LINEAL YARD<br>2.7 OZ / LINEAL YARD<br>0.5 OZ / LINEAL YARD |
| THICKNESS      | 17 MIL.  |  |
| APPLICATION    | STANDARD COMMERCIAL WALLCOVERING PASTES, PRIMERS<br>AND TECHNIQUES<br><br>FOR INDOOR USE IN ENVIRONMENTALLY CONTROLLED<br>SPACES |  |

|                                    |  |   |
|------------------------------------|--|---|
| TESTS / CERTIFICATIONS / QUALITIES |  |   |
| FEDERAL SPECIFICATION              | CCC-408-D TYPE II CLASS A  |   |
| WA SPECIFICATION                   | W-101 TYPE II  |   |
| FIRE TEST RATING                   | MEETS OR EXCEEDS REQUIREMENTS FOR FLAME SPREAD,<br>SMOKE DEVELOPED AND FLASHOVER.<br><br>ASTM-E84 TUNNEL TEST<br>NFPA LIFE SAFETY CODE 101<br>EU CLASS FLAME (EN 15102)<br>CAN/ULC S102  | CLASS A<br>CLASS A<br>PASSED CLASS B, S2<br>PASSED ALL REQUIREMENTS |
| MOLD/MILDEW RESISTANCE             | ASTM-G21 SPECIFICATIONS, PASSED ALL REQUIREMENTS   |   |
| INDOOR AIR QUALITY                 | MANUFACTURED WITH LOW VOC VINYL<br>CALIFORNIA CDPH STANDARD FOR SCHOOLS + OFFICES<br>TESTED PER CA-1350<br>WA CERTIFIED NSF/ANSI 342 SUSTAINABILITY STANDARD   |   |
| ADDITIONAL NOTES                   | MANUFACTURED WITHOUT THE USE OF<br>BROMINATED FLAME RETARDANTS<br><br>MEETS OR EXCEEDS EU TOXICITY STANDARD EN12149<br>A, B, C FOR HEAVY METALS AND FORMALDEHYDE<br><br>NON-WOVEN BACKING CONTAINS 50%<br>POST-CONSUMER RECYCLED CONTENT |   |