


PRODUCT DETAILS

WALLCOVERING PANELS

| | |
|---|---|
| PATTERN: | RHAPSODY |
| COLORWAY: | RAIN |
| ITEM #: | RH01 |
| SUBSTRATES: | TYPE II VINYL (COMMERCIAL) OR MATTE (RESIDENTIAL) |
| PANEL LENGTHS: | 9'H / 12'H / 15'H LONGER AVAILABLE |
| REPEAT: | 52"W X 52"H |
| MATERIAL WIDTH: | 54" UNTRIMMED |
| STRAIGHT MATCH | |
| ½" BLEED + ½" SELVAGE | |
| DIGITAL PRINT | |
| REFER TO SAMPLE FOR ACCURATE COLOR. | |
| PRINT TO ORDER. SLIGHT COLOR VARIATIONS BETWEEN PRINT RUNS. | |
| NOTES: | |

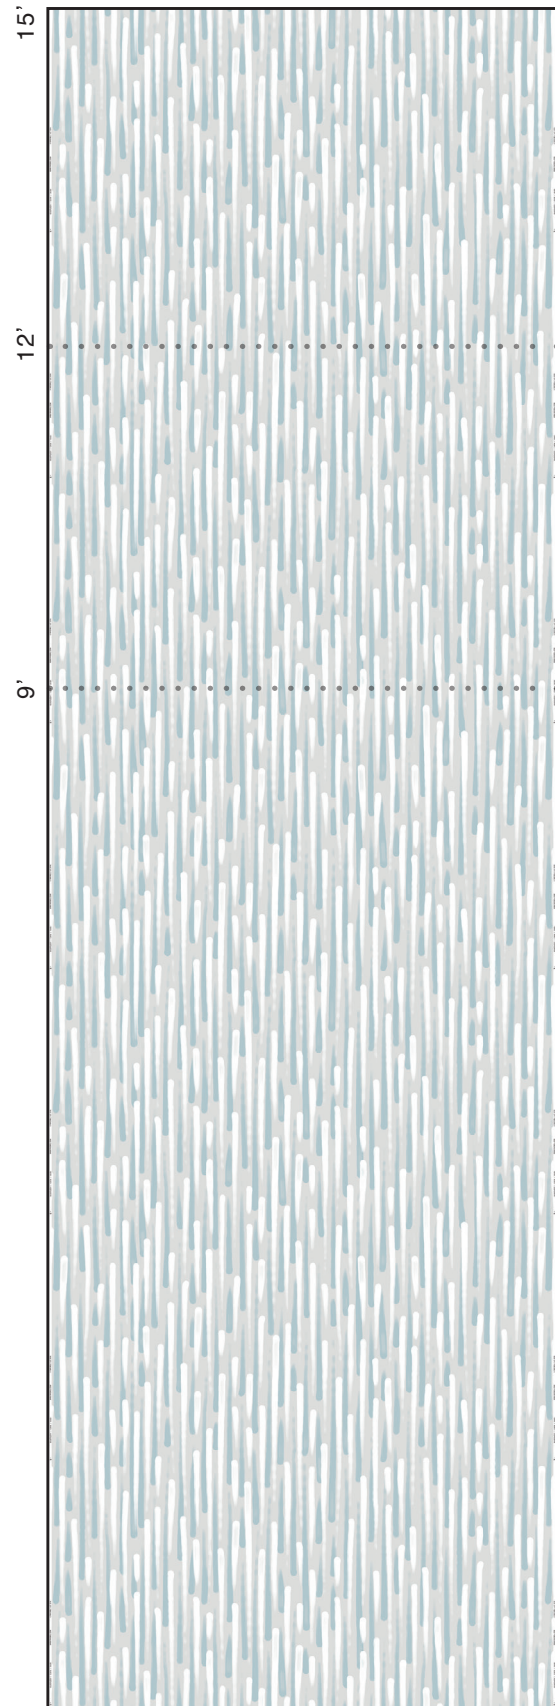

54" (UNTRIMMED)

TYPE II VINYL SUBSTRATE SPECS.

COMMERCIAL

| | | |
|----------------|--|--|
| GENERAL | | LAST UPDATED: 11/28/2018 |
| DESCRIPTION | COMMERCIAL GRADE, WIDE-FORMAT WALLCOVERING MEDIA | |
| CONSTRUCTION | 2-PLY EMBOSSED VINYL FACE/LAMINATED FABRIC BACKING | |
| MATERIAL WIDTH | 54" | |
| WEIGHT | TOTAL: POLYESTER/VINYL WEIGHT: FABRIC WEIGHT: ADHESIVE: | 20 OZ / LINEAL YARD 17 OZ / LINEAL YARD 2.7 OZ / LINEAL YARD 0.3 OZ / LINEAL YARD |
| THICKNESS | 0.017 TO 0.027 IN | |
| APPLICATION | STANDARD COMMERCIAL WALLCOVERING PASTES, PRIMERS AND TECHNIQUES FOR INDOOR USE IN ENVIRONMENTALLY CONTROLLED SPACES | |

| | | |
|------------------------------------|---|--|
| TESTS / CERTIFICATIONS / QUALITIES | | |
| FEDERAL SPECIFICATION | CCC-408-D TYPE II CLASS A | |
| WA SPECIFICATION | W-101 TYPE II, NSF/ANSI 342 SUSTAINABILITY STANDARD | |
| FIRE TEST RATING | ASTM-E84 TUNNEL TEST NFPA LIFE SAFETY CODE 101 EU CLASS FLAME (EN 15102) BS476 PARTS 6 AND 7 CAN/ULC S102 | MEETS OR EXCEEDS REQUIREMENTS FOR FLAME SPREAD, SMOKE DEVELOPED AND FLASHOVER CLASS A CLASS A PASSED CLASS B, S2 PASSED ALL REQUIREMENTS PASSED ALL REQUIREMENTS |
| MOLD/MILDEW RESISTANCE | ASTM-G21 SPECIFICATIONS, PASSED ALL REQUIREMENTS | |
| INDOOR AIR QUALITY | MANUFACTURED WITH LOW VOC VINYL CALIFORNIA CDPH STANDARD FOR SCHOOLS + OFFICES TESTED PER CA-1350 WA CERTIFIED NSF/ANSI 342 SUSTAINABILITY STANDARD | |
| ADDITIONAL NOTES | MANUFACTURED WITHOUT THE USE OF BROMINATED FLAME RETARDANTS MEETS OR EXCEEDS EU TOXICITY STANDARD EN12149 A, B, C FOR HEAVY METALS AND FORMALDEHYDE NON-WOVEN BACKING CONTAINS 50% POST-CONSUMER RECYCLED CONTENT. NSF-342 CERTIFIED FOR SILVER COMPLIANCE FOR 20OZ WALLCOVERING CONSTRUCTIONS | |

MATTE SUBSTRATE SPECS.

RESIDENTIAL

| | |
|----------------|---|
| GENERAL | LAST UPDATED: 06/10/2020 |
| DESCRIPTION | PVC-FREE, MATTE-FINISH WALLCOVERING MEDIA |
| CONSTRUCTION | PROPRIETARY POLYESTER/NATURAL FIBER 20% POST CONSUMER RECYCLED CONTENT |
| MATERIAL WIDTH | 54" |
| WEIGHT | TOTAL: 15 OZ / 54" LINEAL YARD |
| THICKNESS | 17 MIL. |
| APPLICATION | STANDARD COMMERCIAL WALLCOVERING PASTES, PRIMERS AND TECHNIQUES |

| | |
|------------------------------------|--|
| TESTS / CERTIFICATIONS / QUALITIES | |
| FEDERAL SPECIFICATION | CCC-408-D TYPE I |
| FIRE TEST RATINGS | ASTM-E84 TUNNEL TEST CLASS A ACAN 4LC-102.2 PASSED ALL REQUIREMENTS |
| PERMEABILITY | BREATHABLE PER ASTM-E96 PROCEDURE B / 49 PERMS |
| ENVIRONMENTAL | PVC & POA FREE, NO PLASTICIZERS, NO PHTHALATES, NO HALOGEN, NO CHLORINE, NO HEAVY METALS MINIMUM OF 20% POST-CONSUMER RECYCLED MATERIAL. NO HARMFUL OFF GASSING. LOW VOC EMITTING. |
| LEED ELIGIBILITY | CAN CONTRIBUTE TOWARDS THE EARNING OF UP TO 2 LEED CREDITS. MR CREDIT 4.1 RECYCLED CONTENT 10% MR CREDIT 4.2 RECYCLED CONTENT 20% |
| NOTE | PERMEABLE SURFACE ALLOWS TRANSFER OF MOISTURE TO MINIMIZE POSSIBILITY OF MOLD AND MILDEW GROWTH. INTENDED FOR USE IN BUILDINGS THAT ARE PROPERLY DESIGNED AND MAINTAINED TO AVOID MOISTURE INFILTRATION, CONDENSATION, AND/OR ACCUMULATION AT WALL CAVITIES AND WALL SURFACES, ESPECIALLY IN WARM, HUMID CLIMATES. |