


# PRODUCT DETAILS

## WALLCOVERING PANELS

PATTERN:	RHAPSODY
COLORWAY:	ROSE
ITEM #:	RH02
SUBSTRATES:	TYPE II VINYL (COMMERCIAL) OR MATTE (RESIDENTIAL)
PANEL LENGTHS:	9'H / 12'H / 15'H LONGER AVAILABLE
REPEAT:	52"W X 52"H
MATERIAL WIDTH:	54" UNTRIMMED
STRAIGHT MATCH	
½" BLEED + ½" SELVAGE	
DIGITAL PRINT	
REFER TO SAMPLE FOR ACCURATE COLOR.	
PRINT TO ORDER. SLIGHT COLOR VARIATIONS BETWEEN PRINT RUNS.	
NOTES:	

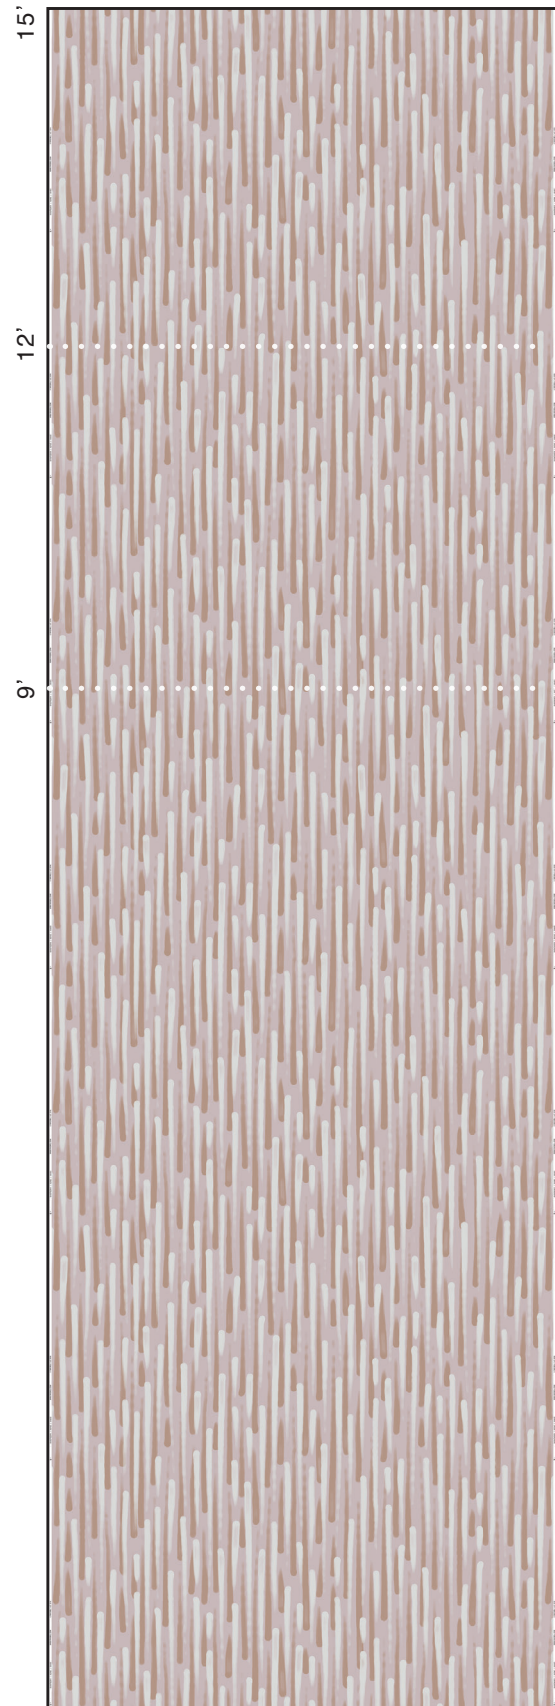

54" (UNTRIMMED)

# TYPE II VINYL SUBSTRATE SPECS.

COMMERCIAL

GENERAL		LAST UPDATED: 11/28/2018
DESCRIPTION	COMMERCIAL GRADE, WIDE-FORMAT WALLCOVERING MEDIA	
CONSTRUCTION	2-PLY EMBOSSED VINYL FACE/LAMINATED FABRIC BACKING	
MATERIAL WIDTH	54"	
WEIGHT	TOTAL: POLYESTER/VINYL WEIGHT: FABRIC WEIGHT: ADHESIVE:	20 OZ / LINEAL YARD 17 OZ / LINEAL YARD 2.7 OZ / LINEAL YARD 0.3 OZ / LINEAL YARD
THICKNESS	0.017 TO 0.027 IN	
APPLICATION	STANDARD COMMERCIAL WALLCOVERING PASTES, PRIMERS AND TECHNIQUES  FOR INDOOR USE IN ENVIRONMENTALLY CONTROLLED SPACES	

TESTS / CERTIFICATIONS / QUALITIES		
FEDERAL SPECIFICATION	CCC-408-D TYPE II CLASS A	
WA SPECIFICATION	W-101 TYPE II, NSF/ANSI 342 SUSTAINABILITY STANDARD	
FIRE TEST RATING	ASTM-E84 TUNNEL TEST NFPA LIFE SAFETY CODE 101 EU CLASS FLAME (EN 15102) BS476 PARTS 6 AND 7 CAN/ULC S102	MEETS OR EXCEEDS REQUIREMENTS FOR FLAME SPREAD, SMOKE DEVELOPED AND FLASHOVER  CLASS A CLASS A PASSED CLASS B, S2 PASSED ALL REQUIREMENTS PASSED ALL REQUIREMENTS
MOLD/MILDEW RESISTANCE	ASTM-G21 SPECIFICATIONS, PASSED ALL REQUIREMENTS	
INDOOR AIR QUALITY	MANUFACTURED WITH LOW VOC VINYL CALIFORNIA CDPH STANDARD FOR SCHOOLS + OFFICES TESTED PER CA-1350 WA CERTIFIED NSF/ANSI 342 SUSTAINABILITY STANDARD	
ADDITIONAL NOTES	MANUFACTURED WITHOUT THE USE OF BROMINATED FLAME RETARDANTS  MEETS OR EXCEEDS EU TOXICITY STANDARD EN12149 A, B, C FOR HEAVY METALS AND FORMALDEHYDE  NON-WOVEN BACKING CONTAINS 50% POST-CONSUMER RECYCLED CONTENT.  NSF-342 CERTIFIED FOR SILVER COMPLIANCE FOR 20OZ WALLCOVERING CONSTRUCTIONS	

# MATTE SUBSTRATE SPECS.

RESIDENTIAL

GENERAL	LAST UPDATED: 06/10/2020
DESCRIPTION	PVC-FREE, MATTE-FINISH WALLCOVERING MEDIA
CONSTRUCTION	PROPRIETARY POLYESTER/NATURAL FIBER 20% POST CONSUMER RECYCLED CONTENT
MATERIAL WIDTH	54"
WEIGHT	TOTAL: 15 OZ / 54" LINEAL YARD
THICKNESS	17 MIL.
APPLICATION	STANDARD COMMERCIAL WALLCOVERING PASTES, PRIMERS AND TECHNIQUES

TESTS / CERTIFICATIONS / QUALITIES	
FEDERAL SPECIFICATION	CCC-408-D TYPE I
FIRE TEST RATINGS	ASTM-E84 TUNNEL TEST CLASS A ACAN 4LC-102.2 PASSED ALL REQUIREMENTS
PERMEABILITY	BREATHABLE PER ASTM-E96 PROCEDURE B / 49 PERMS
ENVIRONMENTAL	PVC & POA FREE, NO PLASTICIZERS, NO PHTHALATES, NO HALOGEN, NO CHLORINE, NO HEAVY METALS MINIMUM OF 20% POST-CONSUMER RECYCLED MATERIAL. NO HARMFUL OFF GASSING. LOW VOC EMITTING.
LEED ELIGIBILITY	CAN CONTRIBUTE TOWARDS THE EARNING OF UP TO 2 LEED CREDITS. MR CREDIT 4.1   RECYCLED CONTENT 10% MR CREDIT 4.2   RECYCLED CONTENT 20%
NOTE	PERMEABLE SURFACE ALLOWS TRANSFER OF MOISTURE TO MINIMIZE POSSIBILITY OF MOLD AND MILDEW GROWTH. INTENDED FOR USE IN BUILDINGS THAT ARE PROPERLY DESIGNED AND MAINTAINED TO AVOID MOISTURE INFILTRATION, CONDENSATION, AND/OR ACCUMULATION AT WALL CAVITIES AND WALL SURFACES, ESPECIALLY IN WARM, HUMID CLIMATES.