

Atthis 5100-24GT2GS

Managed 24 x 10/100/1000 RJ45 &
2 x FX/GbE SFP Switch

Description

Atthis 5100-24GT2GS is a high port density managed access switch designed to deliver Gigabit Ethernet speeds with exceptional performance for high density subscriber base with high ARPU. A variety of traffic-shaping QoS mechanisms and rich software features of Atthis 5100-24GT2GS increase overall efficiency and reliability of the network. Easy-to-use management and monitoring capabilities significantly reduces IT overhead by eliminating the need to manually configure policies on the switch, saving valuable time and effort, and avoids unnecessary OPEX.

The switch is equipped with 24 multi-rate (10/100/1000Mbps) copper and 2 dual-rate (100/1000Mbps) SFP ports to deliver selectable transmission speeds for enterprise and FTTX networks. Using its fiber ports, Atthis 5100-24GT2GS quickly uplinks to the aggregation switches in the network to provide high bandwidth uplinks over variable distances. Thereby, service providers can take advantage of the switch's high port density to extend their reach within LAN areas and also offer high-speed connectivity to their subscribers.



RoHS
CE FC

Features Highlight

Faster Data Transmissions

Providing faster data transmissions over the network is no longer a difficult task to service providers. Atthis 5100-24GT2GS offers a best solution to improve the responsiveness of applications and increase file transfer speeds with its features that deliver high performance. Its high port density provides a 52Gbps non-blocking switching capacity that reduces transmission bottlenecks and increases the bandwidth. Service providers can create a high-performance network infrastructure using Atthis 5100-24GT2GS and fuel their businesses.

Multicast Video Service Support

Deploying multicast applications such as IPTV has never been easier than before with comprehensive multicast traffic functions, IGMP snooping and MVR, in Atthis 5100-24GT2GS. IGMP snooping regulates multicast traffic in a given VLAN and MVR operates with hosts on different VLANs in a Layer 2 network. These features on isolate the multicast streams and significantly reduce traffic from streaming media and other bandwidth-intensive IP multicast applications for better bandwidth. Thereby, Atthis 5100-24GT2GS supports applications that use multi-traffic in large scale across the network, saves network bandwidth, reduces operational burden and enhances the overall network performance.

Comprehensive QoS Mechanisms to Assign Priority

Network applications need different levels of services delivered to them reliably without any transmission delays and interruptions. Atthis 5100-24GT2GS has comprehensive QoS mechanisms that assign priority to applications and send only specific dedicated traffic to them. In addition, bandwidth management functions of the switch allocate greater bandwidth for mission-critical communications. With increased control, administrators can prevent unpredictable errors and utilize the bandwidth more effectively.

Robust Network Security

Atthis 5100-24GT2GS implements complete Layer 2 to Layer 4 ACLs to restrict access to your sensitive network resources by filtering specific packets based on TCP/UDP ports, source and destination IP addresses or particular network devices. Furthermore, DHCP snooping, ARP Inspection, IEEE 802.1X and Port Security provide additional tools to manage access and levels of use of network. These defence mechanisms of Atthis 5100-24GT2GS deliver robust network security and enables service providers to offer more stable services on a more secure network.

Efficient Network Monitoring and Management Tools

Issues that impact network performance can be quickly identify with enhanced traffic management, monitoring and analysis tools including SNMP and RMON. Designed to improve management efficiency, SNMP allows end users to centrally manage different levels in a network and RMON gives the capability to monitor the network performance. Service providers can ensure a reliable network by identifying connectivity and performance issues, and isolating the problem remotely on individual switches. This avoids high OPEX and manage a healthy and efficient network.



Features Highlight


Fine-grained Service Management

Beside basic port-based VLAN function, Atthis 5100-24GT2GS provides higher and flexible levels of VLAN configuration related to MAC and Protocol-based. While MAC-based comprises of defining a virtual network according to the MAC addresses of stations, the Protocol-based VLAN makes it possible to create a virtual network by protocol type. These features along with VLAN stacking enable ISPs to flexibly deliver services with extra security and separation. As a result, ISPs using Atthis 5100-24GT2GS can experience fine-grained service management fulfilling the requirements of their subscribers.

Delivers Enhanced Ring/Path Redundancy and Bandwidth Aggregation

Short spans of missed communication due to link failures can have a negative impact on the network. Recovery and redundancy features are critical for networks handling heavy video and data traffic. Dual Homing, LACP and RSTP provide a highly reliable network with redundancy connections whenever required and guarantee continuous network uptime.

Applications

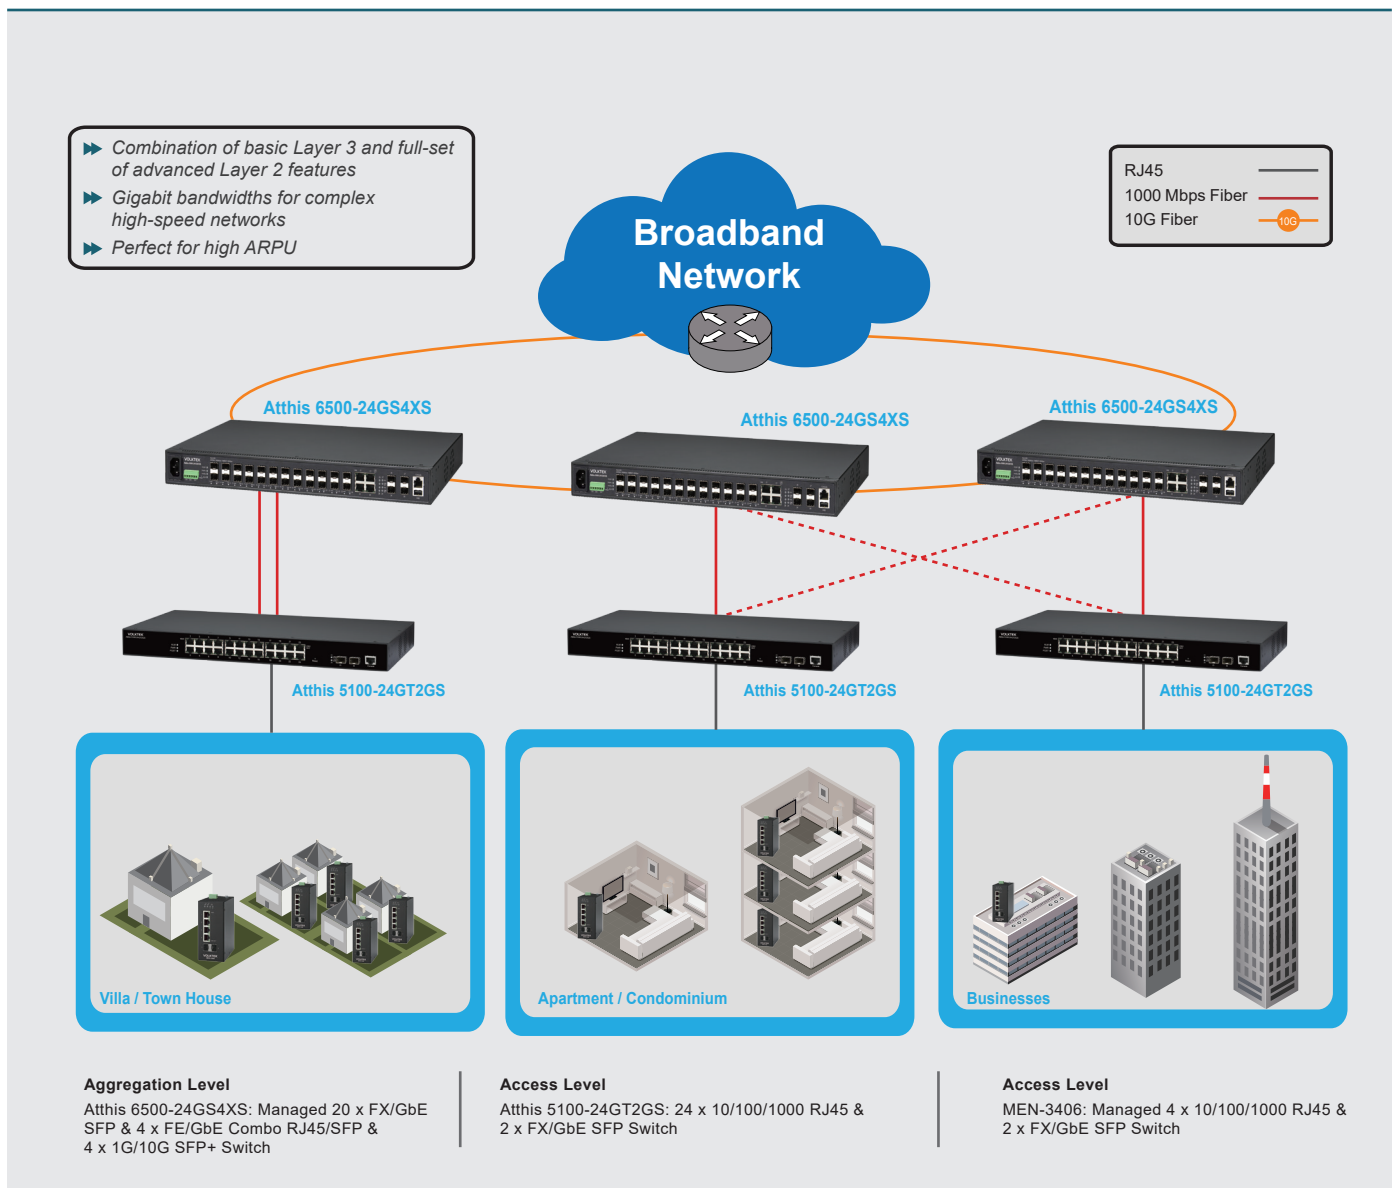

Specifications

Standards		Power		
IEEE 802.3	10BASE-T	Input Voltage	AC version: 100~240V AC, 50/60Hz	
IEEE 802.3u	100BASE-TX/FX	Power Consumption	20W	
IEEE 802.3ab	1000BASE-T	Interface		
IEEE 802.3z	1000BASE-SX/LX	Ports	24 x 10/100/1000BASE-T Ports 2 x FX/GbE SFP 1 x Console Port	
IEEE 802.3x	Flow Control	Mechanical and Environment		
IEEE 802.1D	STP	Rack Space	19"	
IEEE 802.1w	RSTP	Form Factor	Rackmount	
IEEE 802.1p	Class of Service	FAN	Fanless	
IEEE 802.1Q	VLAN Tagging	Operating Temperature	0°C to 50°C (32°F~122°F)	
IEEE 802.3az	Energy Efficient Ethernet	Storage Temperature	-20°C to 70°C (-4°F~158°F)	
IEEE 802.1AB	LLDP	Operating Humidity	5% to 95% (non-condensing)	
IEEE 802.1ad	QinQ	Storage Humidity	5% to 95% (non-condensing)	
Features		Dimension (W x H x D)	440 x 44 x 310 mm (17.3 x 1.7 x 12.3 in)	
Performance	Switching Capacity: 52Gbps	Weight	4000 g (8.8 lb)	
	Forwarding Rate 38.7Mpps	Standards and Certifications		
	Jumbo frame Size: 10KB	Electromagnetic Compatibility	FCC Class A EN 62368-1 EN 55032 Class A EN 55035 EN 61000-3-2 Class A EN 61000 3-3	
	Packet Buffer: 4.1Mbits	RoHS	Present	
	MAC Table Entries: 8K	Shock	IEC 60068-2-27	
Management	Active VLAN: 4K	Freefall	IEC 60068-2-31	
	CLI, Telnet/SSH, HTTP, SNMP v1/v2c/v3, SNMP Trap, MVLAN, Firmware Upgradable, Configuration Backup/Restore, Syslog, STP, LLDP, DHCP Client/Relay/Option 82, e-mail Alarm, Server Control, Mirroring, DDM, SFP Info, Auto-Provisioning, EEE, RMON Statistics, ERPS	Vibration	IEC 60068-2-6	
	Reliability	STP/RSTP, Dual Homing, LACP, Static Trunk	Ordering Information	
	VLAN	IEEE 802.1Q, Port-based VLAN, MAC-based VLAN	Atthis 5100-24GT2GS-A-C	Managed 24 x 10/100/1000 RJ45 & 2 x FE/GbE SFP Switch, with Internal AC Power
	Traffic Control	IGMP Snooping, QoS, Flow Control, Rate Limit, Storm Control, Traffic Monitor, Port Isolation, Loop Detection	Optional Accessories	
Security	ACL, SSH, Port-based 802.1X, Port Security, MAC Search, Static MAC, DHCP Snooping, DHCP Sever Screening, ARP Inspection, BPDU Guard/Filter, Root Guard, Managed Host	GBM-104	1000BASE-SX 1.25G, Multi-mode SFP, 500m (1640.42 ft)	
		GBM-123TS	1000BASE-LX, Bi-Di SFP TX:1310/RX:1550 Single Mode, 10Km, 0°C~70°C (32°F~158°F)	
		GBM-123RS	1000BASE-LX, Bi-Di SFP TX:1550/RX:1310 Single Mode, 10Km, 0°C~70°C (32°F~158°F)	

Dimension

