

# IMC-661

## 1 x 10/100/1000 RJ45 to 1 x FX/GbE SFP Industrial Converter

### Description

The IMC-661 Unmanaged Industrial Media Converter is specifically engineered to offer an affordable solution for industrial systems. Built to withstand in operating temperature from  $-40^{\circ}\text{C}$  to  $75^{\circ}\text{C}$ , the media converter can operate consistently even in harsh industrial environments. The IMC-661 features intelligent functions like Auto MDI/MDIX, LFS (Link Fault Signalling), LLB (Line Loopback), LEDs, DIP switches to provide easy plug-and-play, continuous monitoring thereby minimizing downtime for mission-critical networks.

Featuring one 10/100/1000Mbps copper port, the IMC-661 provides convenience to connect any other switch/hub/PLC through copper cable. Equipped with one multi-rate 100/1000Mbps SFP slot, the media converter offers fiber advantages of secure data transmissions over long distances to mission-critical networks. IMC-661 provides maximum bandwidth flexibility and extended connectivity for workgroups that are ready to expand and migrate from existing fast Ethernet network to gigabit network.



### Features Highlight

#### Robust Switch Performance

With an industrial aluminum housing case, IP30, surge and ESD protection, the IMC-661 provides a high level of immunity against electromagnetic interference and heavy electrical surges, thus facilitating easy deployment in demanding environments. In addition, the IMC-661 offers high performance switch architecture with one 10/100/1000BASE-T port and one 100FX/Gigabit Ethernet SFP slot to meet the requirements of high-bandwidth access in extreme operating temperatures.



#### Fault-tolerant and User-friendly Monitoring

Network administrators can now easily monitor and troubleshoot issues associated with device functionality and link activity using the advanced features of IMC-661. LFS (Link Fault Signalling) enables you to easily detect optical signal strengths and faulty links on both copper and fiber ports. And LLB (Line look back) allows you to remotely isolate and localize network problems, thereby significantly minimizing network downtime. In addition, the LEDs on the device convey essential diagnostic and status information of device power, link activity on ports etc. allowing you to easily monitor without having to get into tight spaces.

#### Redundant Power Supply


Considering the single power circuit failure impact in heavy industrial applications, IMC-661 is developed with standard "6-pin Terminal Block" for redundant power to provide continuous service resulting reliable and consistent network. In addition, the switch is equipped with alarm feature to notify the occurrence of power failure, helps in quick respond and faster trouble shooting.

#### Easy Plug-and-play Operation



Being compact in size, IMC-661 media converter is an easy-to-setup and ready-to-use solution for any application system. Featuring Auto-MDI/MDIX and Auto-negotiation, the media converter automatically detects and configures the best mode of operation over a link. This eliminates the need for user setup or configuration procedure and simplifies installation, once installed these media converters operate automatically.

## Applications

The IMC-661 is compatible with 10/100/1000Mbps through RJ45 transceivers to guarantee a strong, stable connection of Ethernet, Fast Ethernet or Gigabit Ethernet, providing flexible deployment options to satisfy industrial networking requirements

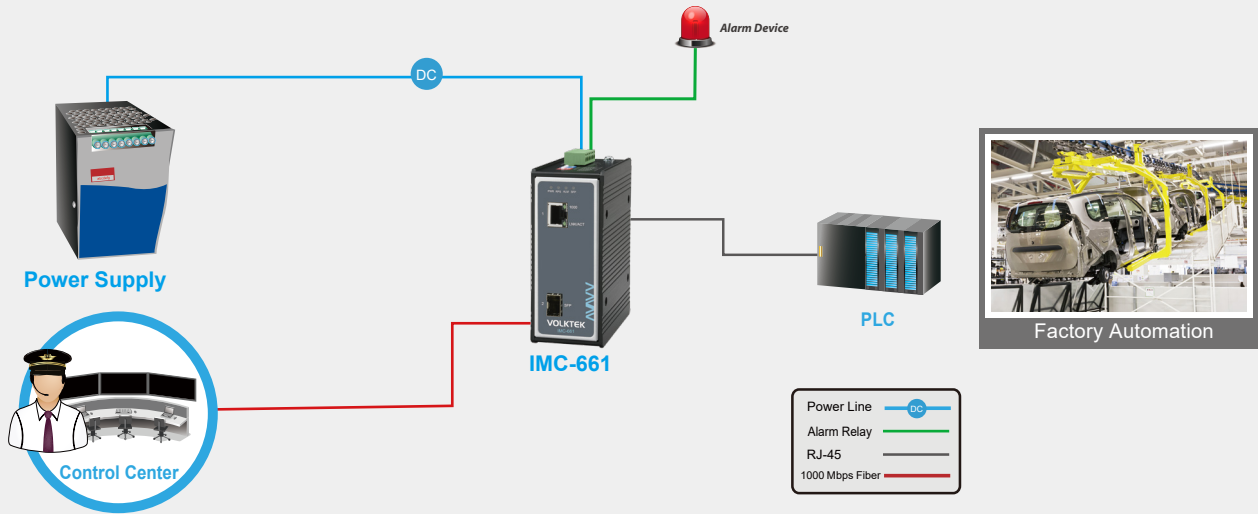

### Fiber-Optic Link Capability Enables Extension of Network Deployment

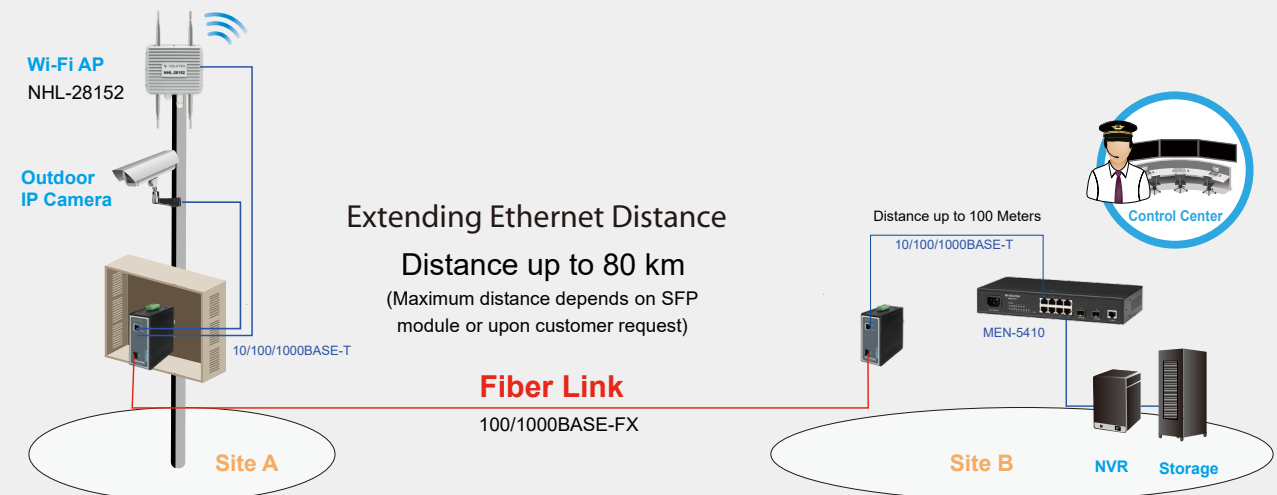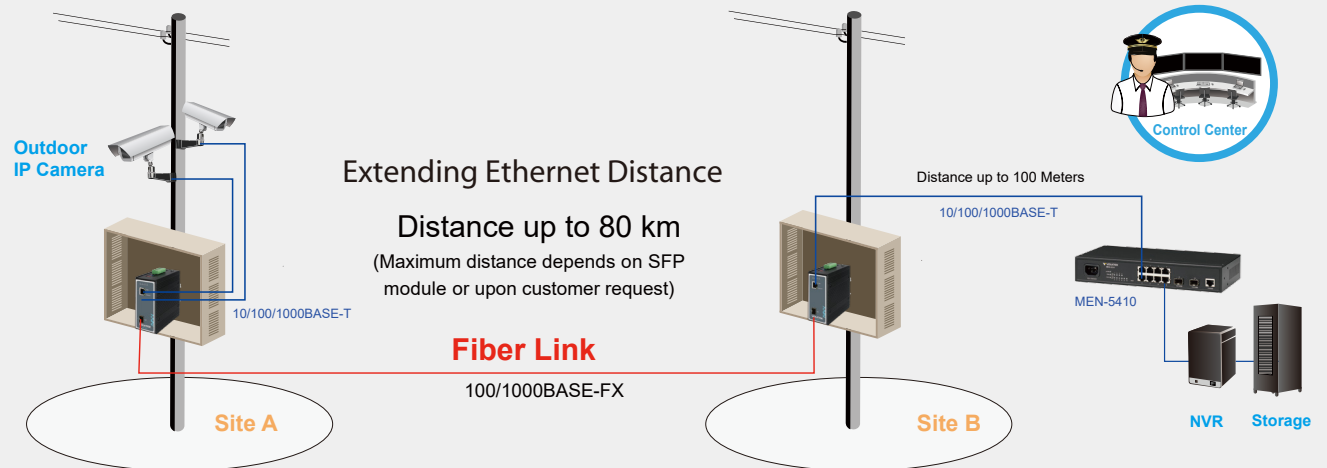

\* The diagram illustrates a typical application for the IMC-661 & IMC-662 media converter. The actual distances will depend on several factors, including the quality of cables used and the terminal equipment employed.

## Specifications

Standards	
IEEE 802.3	10BASE-T
IEEE 802.3u	100BASE-TX/FX
IEEE 802.3ab	1000BASE-T
IEEE 802.3z	1000BASE-SX/LX
IEEE 802.3x	Flow Control
IEEE 802.3az	Energy Efficient Ethernet (EEE)
Interface	
Ports	1 x 100FX/Gigabit SFP slot 1 x 10/100/1000BASE-T (PSE)
DIP Switch	Primary/Redundant Power Voltage Drop Alarm setting
LED Panel	PWR, RPS, ALM, SFP slot, 1000, LNK/ACT
Features	
Performance	Jumbo Frame size: 10K
	MAC table size: 8K
	Fabric: 4Gbps
	Packet buffer: 1Mbit
Management	Device Monitoring: LFS (Link Fault Signalling)
	Device Management: LLB (Line Loopback)
	Security: Port Isolation
Power	
Input Voltage	Primary: 20~57V DC
	Redundant: 20~57V DC
Power Connection	4-pin DC-Jack (Primary Power Input) 6-pin Terminal block (Primary/Redundant Power Input)
Input Polarity Protection	Present
Voltage Drop Alarm	Primary/Redundant Power Input
Alarm Relay	One relay output with current carrying capacity of 1A @ 24V DC
Power Consumption	6W
ESD Protection	Present
Surge Protection	Present
Mechanical and Environment	
Housing	Aluminum (IP30 Protection)
Mounting	DIN-Rail
Operating Temperature	-40°C~75°C (-40°F~167°F)
Storage Temperature	-40°C~85°C (-40°F~185°F)
Operating Humidity	10 to 95% RH (non-condensing)

Storage Humidity	5 to 95% RH (non-condensing)	
Weight	486 g (1.07 lb)	
Dimension (WxHxD)	50 x 120 x 100 mm (1.97 x 4.72 x 3.94 in)	
Certifications		
Safety	EN 60950	
FCC	Part 15 Subpart B Class A	
CE	EMI	EN 55022 class A
	EMS	EN 55024
		EN 61000-4-2 (ESD)
		EN 61000-4-3 (RS)
		EN 61000-4-4 (EFT)
		EN 61000-4-5 (Surge)
EN 61000-4-6 (CS)		
EN 61000-4-8 (PFMF)		
Shock	IEC 60068-2-27	
Freefall	IEC 60068-2-32	
Vibration	IEC 60068-2-6	
Ordering Information		
IMC-661	1 x 10/100/1000 RJ45 to 1 x FX/GbE SFP Industrial Converter, -40°C~75°C	
Optional Accessories		
FPM-107	100BASE-FX Multi-mode SFP, 2Km	
GBM-132TS	100BASE-FX, Bi-Di SFP TX:1310/RX:1550 Single Mode, 20Km, 0°C~70°C (32°F~158°F)	
GBM-132RS	100BASE-FX, Bi-Di SFP TX:1550/RX:1310 Single Mode, 20Km, 0°C~70°C (32°F~158°F)	
GBM-104	1000BASE-SX 1.25G, Multi-mode SFP, 500m	
GBM-123TS	1000BASE-LX, Bi-Di SFP TX:1310/RX:1550 Single Mode 10Km, 0°C~70°C (32°F~158°F)	
GBM-123RS	1000BASE-LX, Bi-Di SFP TX:1550/RX:1310 Single Mode 10Km, 0°C~70°C (32°F~158°F)	

**Note :**

\* The SFP communication distance upon the request.

\* Industrial SFP with wide operating temperature from -40°C~85°C is available upon request.

\* Specifications subject to change without notice.

## Dimension

